

5SNG 0300Q170300

62Pak phase leg IGBT Module

$V_{CE} = 1700\text{ V}$
 $I_C = 300\text{ A}$

Ultra low-loss, rugged SPT++ chip-set
 Smooth switching SPT++ chip-set for good EMC
 Cu base-plate for low thermal resistance
 Industry standard package
 2 switches in one package



Maximum rated values ¹⁾

| Parameter | Symbol | Conditions | min | max | Unit |
|--------------------------------|--------------|--|-----|------------------------|--------------------|
| Collector-emitter voltage | V_{CES} | $V_{GE} = 0\text{ V}$, $T_{vj} \geq 25\text{ °C}$ | | 1700 | V |
| DC collector current | I_C | $T_C = 100\text{ °C}$, $T_{vj} = 175\text{ °C}$ | | 300 | A |
| Peak collector current | I_{CM} | $t_p = 1\text{ ms}$ | | 600 | A |
| Gate-emitter voltage | V_{GES} | | -20 | 20 | V |
| Total power dissipation | P_{tot} | $T_C = 25\text{ °C}$, $T_{vj} = 175\text{ °C}$, per switch | | 1875 | W |
| DC forward current | I_F | | | 300 | A |
| Peak forward current | I_{FRM} | $t_p = 1\text{ ms}$ | | 600 | A |
| Surge current | I_{FSM} | $V_R = 0\text{ V}$, $T_{vj} = 175\text{ °C}$, $t_p = 10\text{ ms}$, half-sinewave | | 1800 | A |
| IGBT short circuit SOA | t_{psc} | $V_{CC} = 1300\text{ V}$, $V_{CEM\ CHIP} \leq 1700\text{ V}$ $V_{GE} \leq 15\text{ V}$, $T_{vj} \leq 175\text{ °C}$ | | 10 | μs |
| Isolation voltage | V_{isol} | 1 min, $f = 50\text{ Hz}$ | | 4000 | V |
| Junction temperature | T_{vj} | | | 175 | $^{\circ}\text{C}$ |
| Junction operating temperature | $T_{vj(op)}$ | | -40 | 175 | $^{\circ}\text{C}$ |
| Case temperature | T_C | | -40 | 125 ²⁾ /150 | $^{\circ}\text{C}$ |
| Storage temperature | T_{stg} | | -40 | 125 | $^{\circ}\text{C}$ |
| Mounting torques ³⁾ | M_s | Base-heatsink, M6 screws | 3 | 6 | Nm |
| | M_{t1} | Main terminals, M6 screws | 3 | 6 | |

¹⁾ Maximum rated values indicate limits beyond which damage to the device may occur per IEC 60747

²⁾ for UL1557 compliance T_{Cmax} must be limited to 125 $^{\circ}\text{C}$

³⁾ for detailed mounting instructions refer to ABB Document No. 5SYA 2106

IGBT characteristic values ⁴⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|--|----------------------|---|---------------------------------------|------|-----|---------------|
| Collector (-emitter) breakdown voltage | $V_{(BR)CES}$ | $V_{GE} = 0 \text{ V}$, $I_C = 10 \text{ mA}$, $T_{vj} = 25 \text{ }^\circ\text{C}$ | 1700 | | | V |
| Collector-emitter ⁵⁾ saturation voltage | $V_{CE \text{ sat}}$ | $I_C = 300 \text{ A}$, $V_{GE} = 15 \text{ V}$ | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 2.25 | 2.6 | V |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 2.55 | | V |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 2.75 | | V |
| Collector cut-off current | I_{CES} | $V_{CE} = 1700 \text{ V}$, $V_{GE} = 0 \text{ V}$ | $T_{vj} = 25 \text{ }^\circ\text{C}$ | | 1 | mA |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 1.5 | | mA |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 30 | | mA |
| Gate leakage current | I_{GES} | $V_{CE} = 0 \text{ V}$, $V_{GE} = \pm 20 \text{ V}$, $T_{vj} = 175 \text{ }^\circ\text{C}$ | -1 | | 1 | μA |
| Gate-emitter threshold voltage | $V_{GE(th)}$ | $I_C = 12 \text{ mA}$, $V_{CE} = V_{GE}$, $T_{vj} = 25 \text{ }^\circ\text{C}$ | 4.5 | | 6.5 | V |
| Gate charge | Q_G | $I_C = 300 \text{ A}$, $V_{CE} = 900 \text{ V}$, $V_{GE} = -15 \text{ V} \dots 15 \text{ V}$ | | 2.1 | | μC |
| Input capacitance | C_{ies} | $V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$, $T_{vj} = 25 \text{ }^\circ\text{C}$ | | 19.2 | | nF |
| Output capacitance | C_{oes} | | | 1.7 | | nF |
| Reverse transfer capacitance | C_{res} | | | 1.6 | | nF |
| Internal gate resistance | R_{Gint} | per switch | | 2.5 | | Ω |
| Turn-on delay time | $t_{d(on)}$ | $V_{CC} = 900 \text{ V}$, $I_C = 300 \text{ A}$, $R_G = 2.2 \text{ } \Omega$, $V_{GE} = \pm 15 \text{ V}$, $L_\sigma = 60 \text{ nH}$, inductive load | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 260 | | ns |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 275 | | ns |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 285 | | ns |
| Rise time | t_r | $V_{CC} = 900 \text{ V}$, $I_C = 300 \text{ A}$, $R_G = 2.2 \text{ } \Omega$, $V_{GE} = \pm 15 \text{ V}$, $L_\sigma = 60 \text{ nH}$, inductive load | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 95 | | ns |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 98 | | ns |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 102 | | ns |
| Turn-off delay time | $t_{d(off)}$ | $V_{CC} = 900 \text{ V}$, $I_C = 300 \text{ A}$, $R_G = 2.2 \text{ } \Omega$, $V_{GE} = \pm 15 \text{ V}$, $L_\sigma = 60 \text{ nH}$, inductive load | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 365 | | ns |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 455 | | ns |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 550 | | ns |
| Fall time | t_f | $V_{CC} = 900 \text{ V}$, $I_C = 300 \text{ A}$, $R_G = 2.2 \text{ } \Omega$, $V_{GE} = \pm 15 \text{ V}$, $L_\sigma = 60 \text{ nH}$, inductive load | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 160 | | ns |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 165 | | ns |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 180 | | ns |
| Turn-on switching energy | E_{on} | $V_{CC} = 900 \text{ V}$, $I_C = 300 \text{ A}$, $R_G = 2.2 \text{ } \Omega$, $V_{GE} = \pm 15 \text{ V}$, $L_\sigma = 60 \text{ nH}$, inductive load | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 75 | | mJ |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 95 | | mJ |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 115 | | mJ |
| Turn-off switching energy | E_{off} | $V_{CC} = 900 \text{ V}$, $I_C = 300 \text{ A}$, $R_G = 2.2 \text{ } \Omega$, $V_{GE} = \pm 15 \text{ V}$, $L_\sigma = 60 \text{ nH}$, inductive load | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 50 | | mJ |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 75 | | mJ |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 95 | | mJ |
| Short circuit current | I_{SC} | $t_{psc} \leq 10 \text{ } \mu\text{s}$, $V_{GE} = 15 \text{ V}$, $V_{CC} = 1300 \text{ V}$, $V_{CEM \text{ CHIP}} \leq 1700 \text{ V}$ | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 950 | | A |

⁴⁾ Characteristic values according to IEC 60747 - 9

⁵⁾ Collector-emitter saturation voltage is given at chip level

Diode characteristic values ⁶⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|-------------------------------|-----------|--|---------------------------------------|------|-----|---------------|
| Forward voltage ⁷⁾ | V_F | $I_F = 300 \text{ A}$ | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 1.6 | 2.2 | V |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 1.75 | | V |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 1.7 | | V |
| Peak reverse recovery current | I_{RM} | | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 330 | | A |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 390 | | A |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 450 | | A |
| Recovered charge | Q_r | $V_{CC} = 900 \text{ V}$, $I_F = 300 \text{ A}$, $V_{GE} = \pm 15 \text{ V}$, $R_G = 2.2 \text{ } \Omega$, $di/dt = 3.4 \text{ kA}/\mu\text{s}$ $L_\sigma = 60 \text{ nH}$, inductive load | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 86 | | μC |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 131 | | μC |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 178 | | μC |
| Reverse recovery time | t_{rr} | | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 600 | | ns |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 720 | | ns |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 840 | | ns |
| Reverse recovery energy | E_{rec} | | $T_{vj} = 25 \text{ }^\circ\text{C}$ | 50 | | mJ |
| | | | $T_{vj} = 125 \text{ }^\circ\text{C}$ | 75 | | mJ |
| | | | $T_{vj} = 175 \text{ }^\circ\text{C}$ | 110 | | mJ |

⁶⁾ Characteristic values according to IEC 60747 - 2

⁷⁾ Forward voltage is given at chip level

Package properties ⁸⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|---|---------------------------|---|------------------------------------|-------|-------|------------|
| IGBT thermal resistance junction to case | $R_{th(j-c)IGBT}$ | per switch | | | 0.080 | K/W |
| Diode thermal resistance junction to case | $R_{th(j-c)DIODE}$ | | | | 0.120 | K/W |
| IGBT thermal resistance ³⁾ case to heatsink | $R_{th(c-s)IGBT}$ | IGBT per switch, λ grease = $1\text{W}/\text{m} \times \text{K}$ | | 0.033 | | K/W |
| Diode thermal resistance ³⁾ case to heatsink | $R_{th(c-s)DIODE}$ | Diode per switch, λ grease = $1\text{W}/\text{m} \times \text{K}$ | | 0.050 | | K/W |
| Comparative tracking index | CTI | | 200 | | | |
| Module stray inductance | $L_{\sigma CE}$ | per switch | | 20 | | nH |
| Resistance, terminal-chip | $R_{CC' \rightarrow EE'}$ | per switch | $T_C = 25 \text{ }^\circ\text{C}$ | 0.7 | | m Ω |
| | | | $T_C = 125 \text{ }^\circ\text{C}$ | 0.98 | | |
| | | | $T_C = 175 \text{ }^\circ\text{C}$ | 1.12 | | |

³⁾ For detailed mounting instructions refer to ABB Document No. 5SYA 2106

Mechanical properties ⁸⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|---------------------------|-----------|---|---------------------|-----|-----|------|
| Dimensions | L x W x H | Typical | 106.4 x 61.4 x 30.9 | | | mm |
| Clearance distance in air | d_a | according to IEC 60664-1 and EN 50124-1 | Term. to base: | 23 | | mm |
| | | | Term. to term: | 11 | | |
| Surface creepage distance | d_s | according to IEC 60664-1 and EN 50124-1 | Term. to base: | 29 | | mm |
| | | | Term. to term: | 23 | | |
| Mass | m | | | 330 | | g |

⁸⁾ Package and mechanical properties according to IEC 60747 - 15

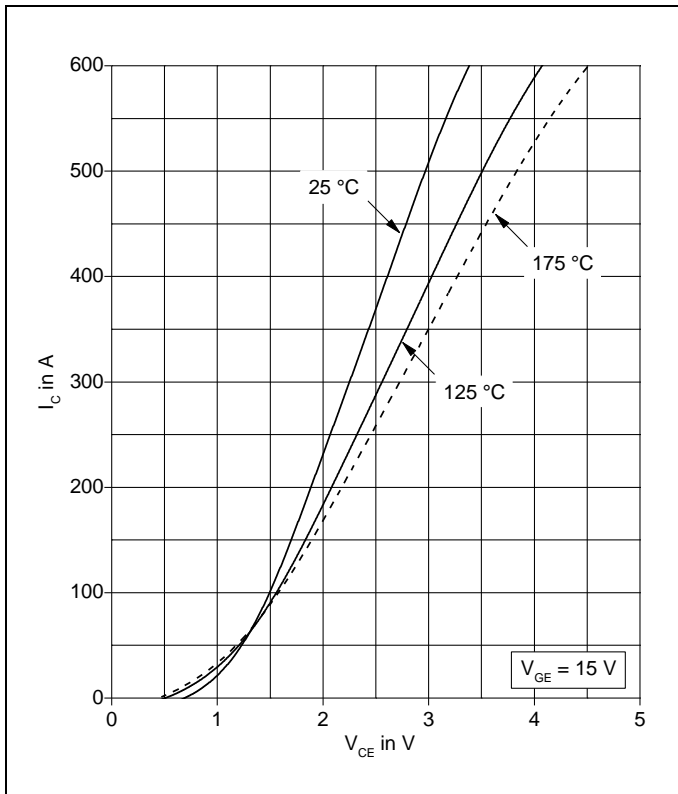


Fig. 1 Typical on-state characteristics, chip level

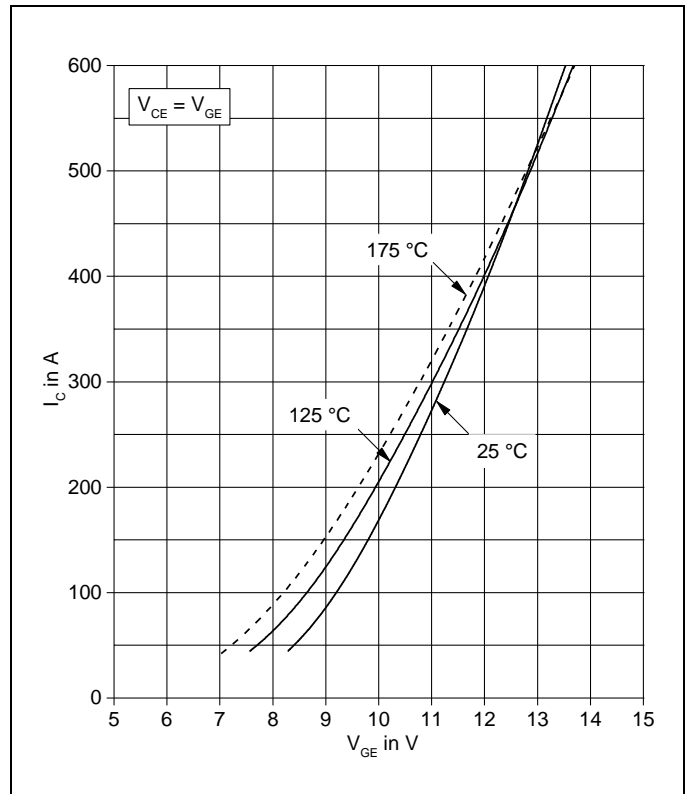


Fig. 2 Typical transfer characteristics, chip level

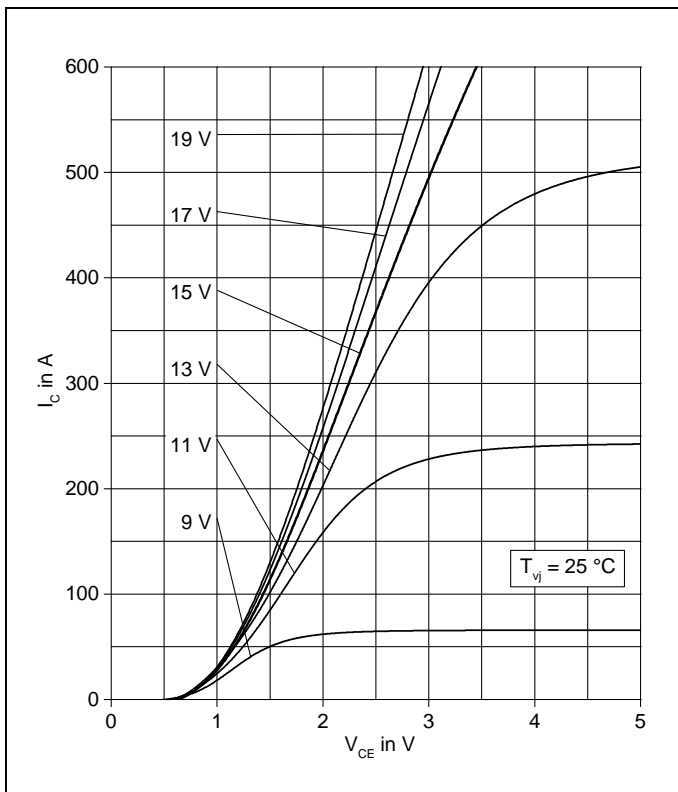


Fig. 3 Typical output characteristics, chip level

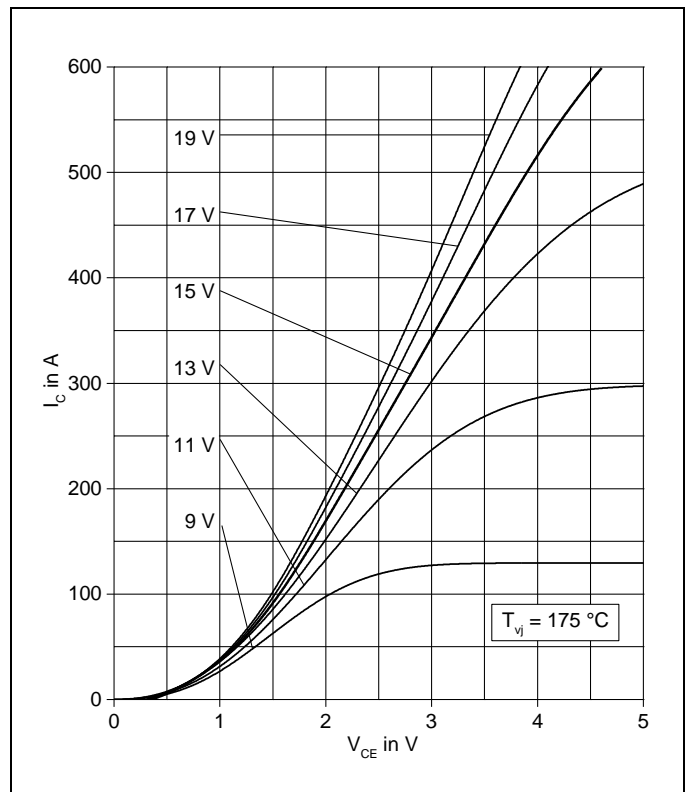


Fig. 4 Typical output characteristics, chip level

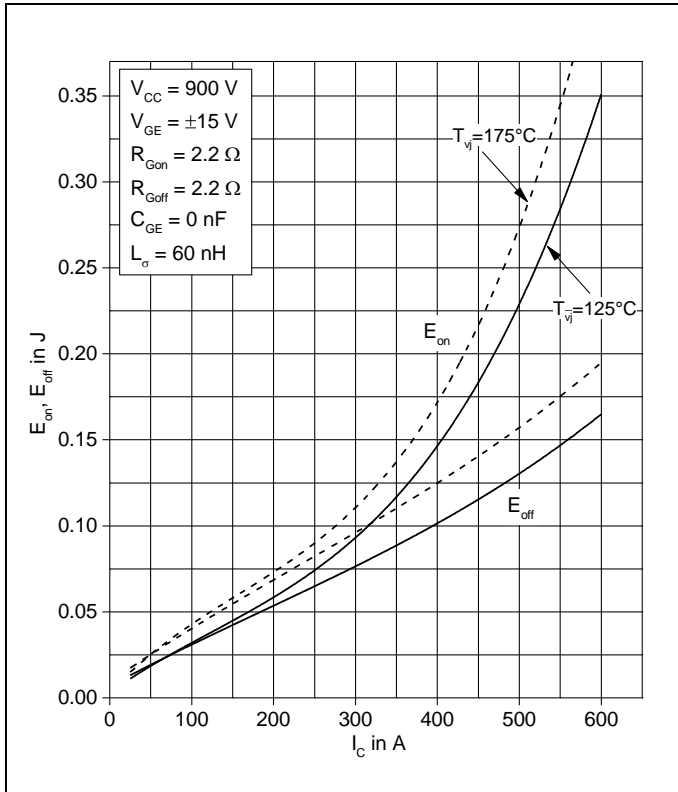


Fig. 5 Typical switching energies per pulse vs. collector current

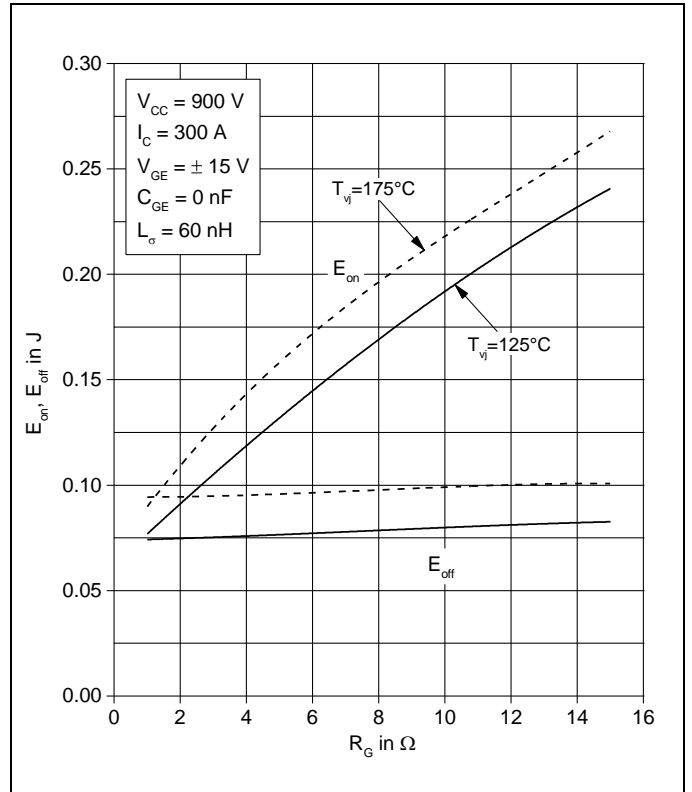


Fig. 6 Typical switching energies per pulse vs. gate resistor

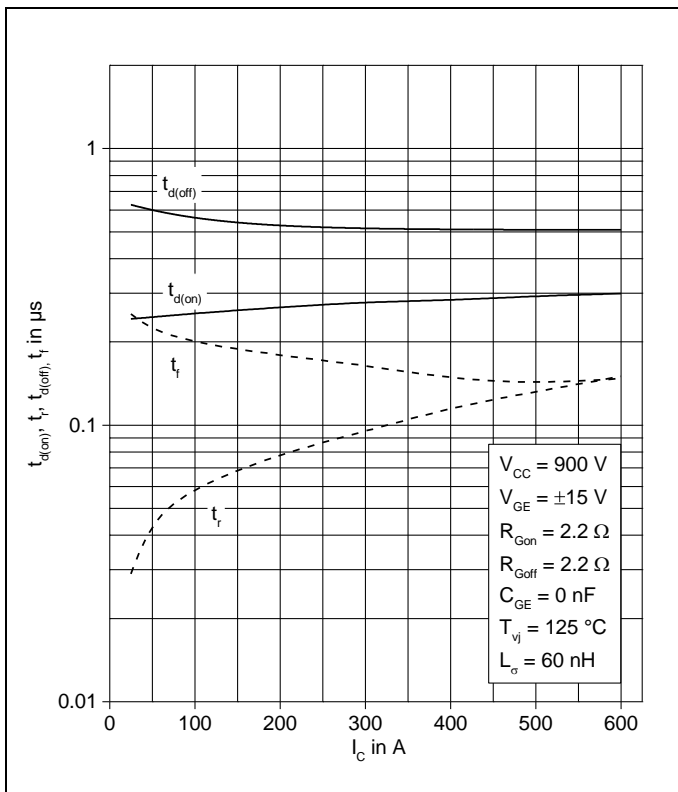


Fig. 7 Typical switching times vs. collector current

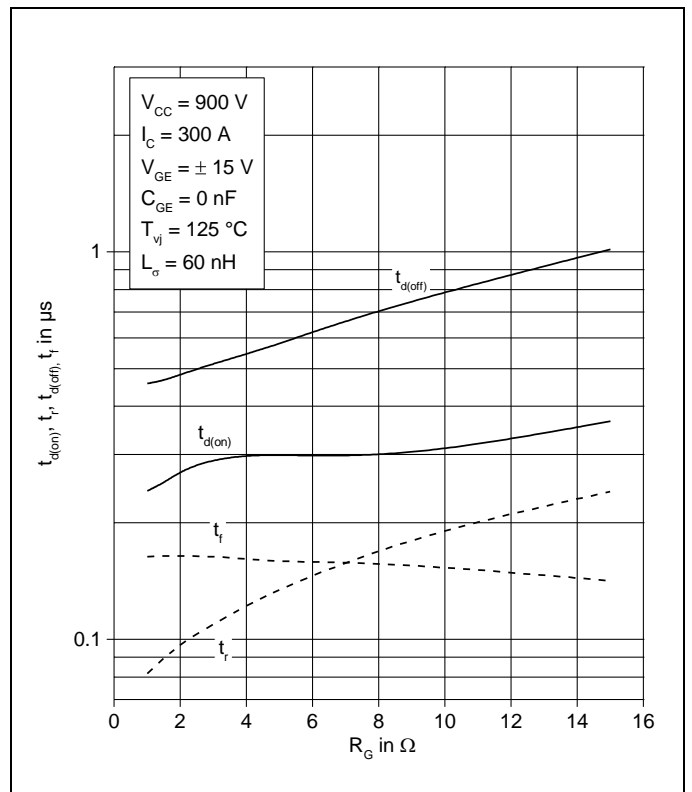


Fig. 8 Typical switching times vs. gate resistor

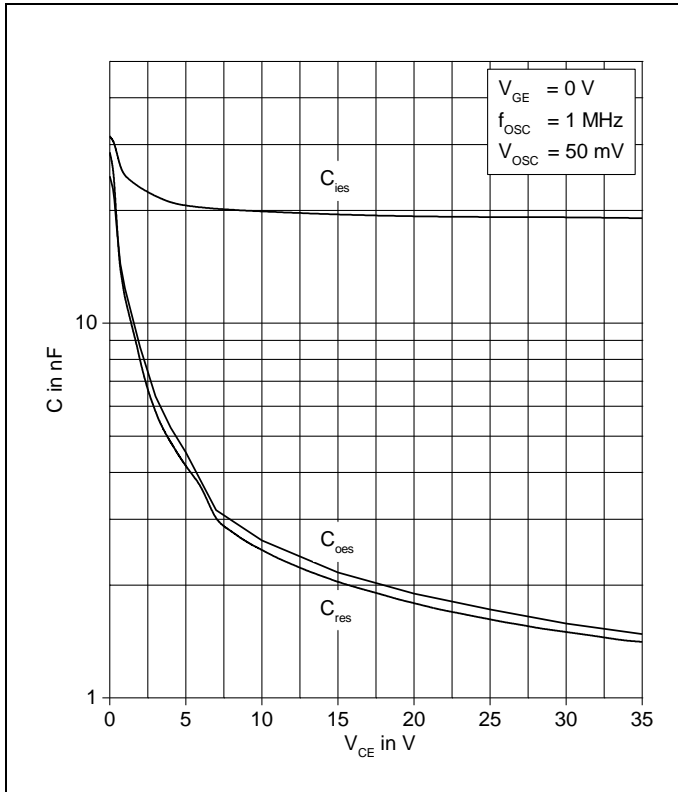


Fig. 9 Typical capacitances vs. collector-emitter voltage

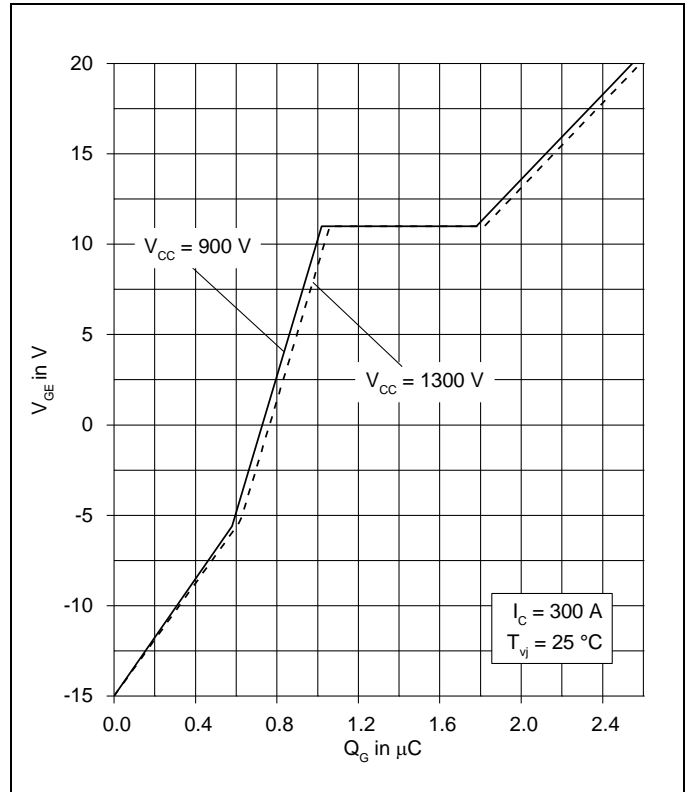


Fig. 10 Typical gate charge characteristics

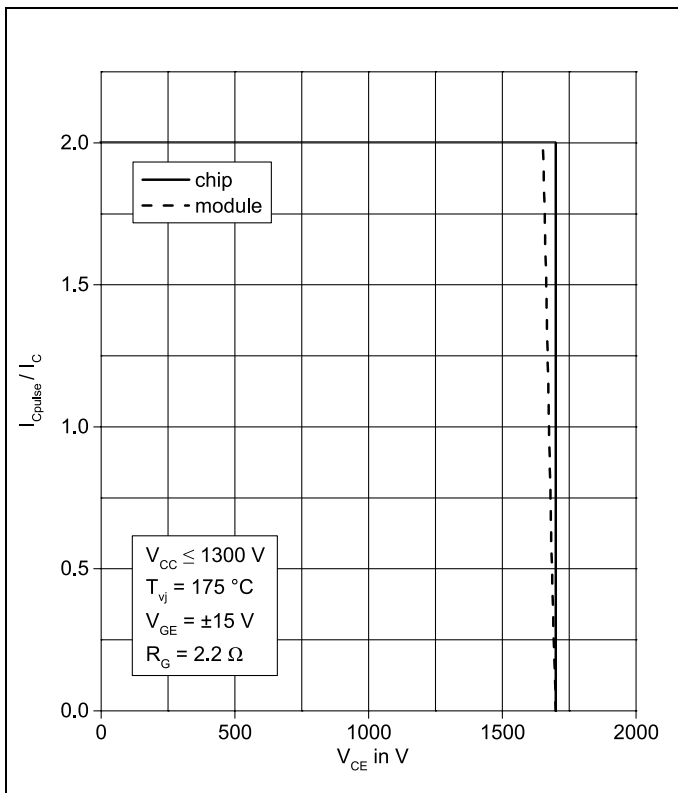


Fig. 11 Turn-off safe operating area (RBSOA)

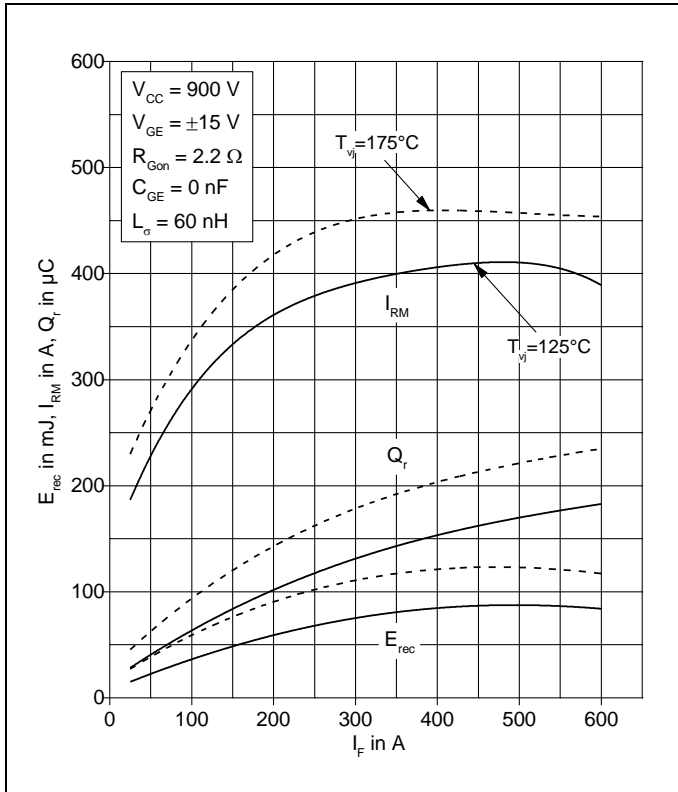


Fig. 12 Typical reverse recovery characteristics vs. forward current

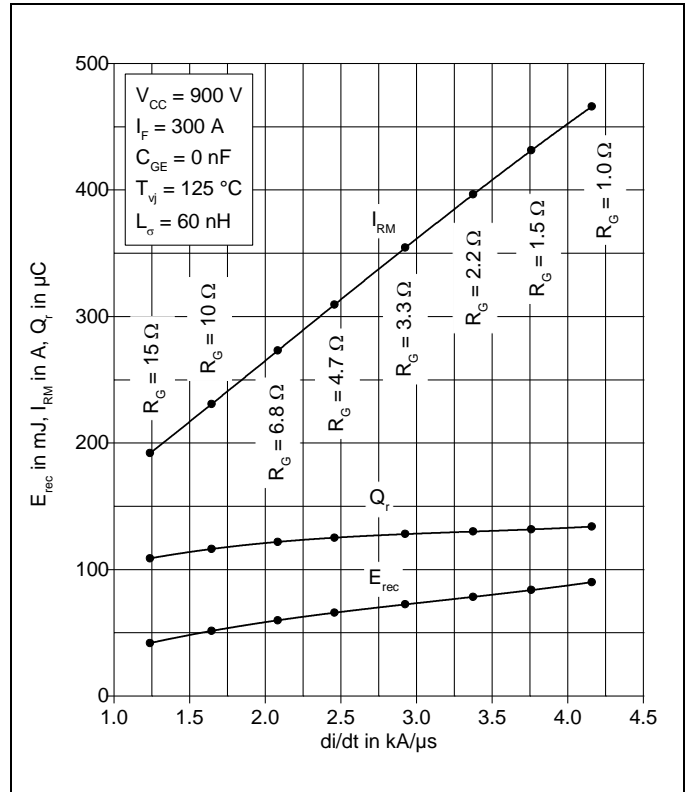


Fig. 13 Typical reverse recovery characteristics vs. di/dt

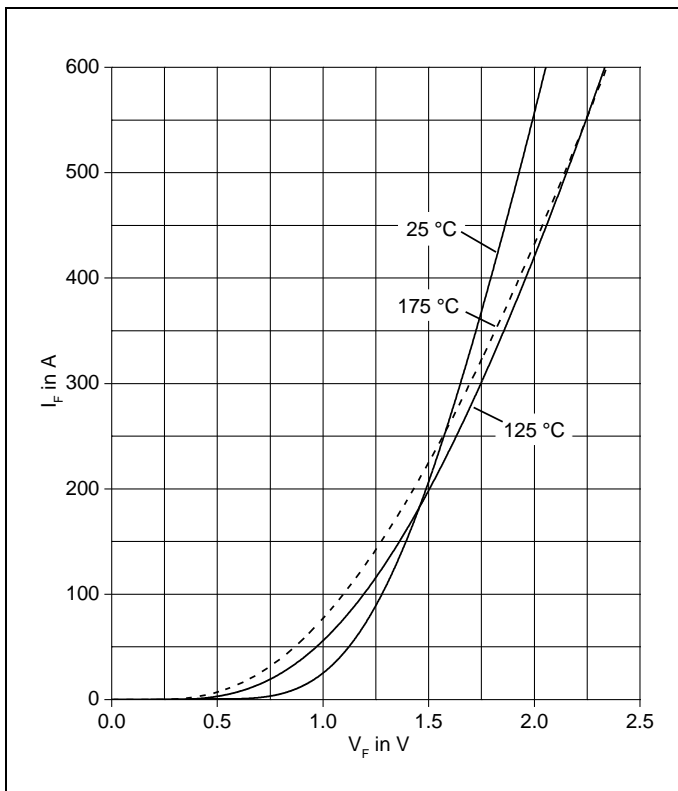


Fig. 14 Typical diode forward characteristics, chip level

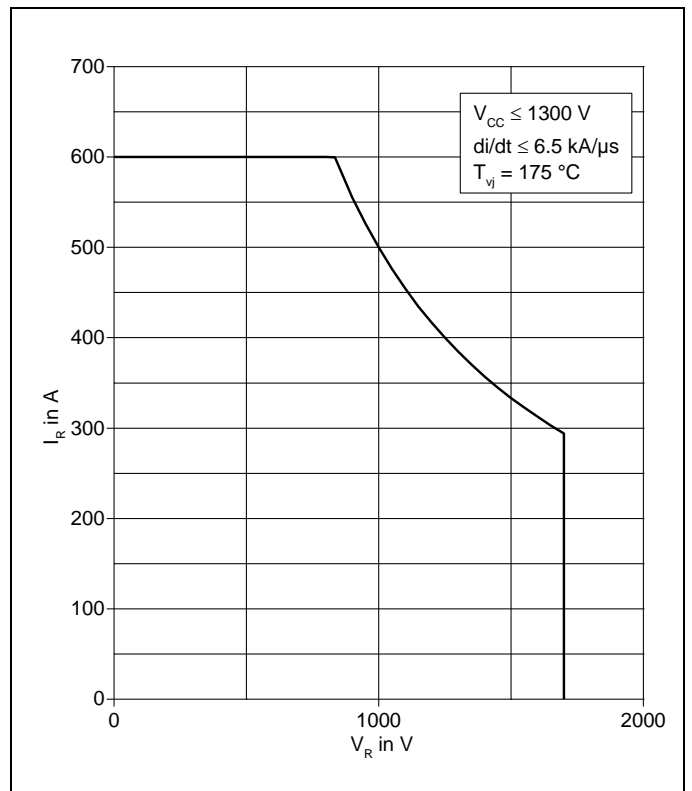


Fig. 15 Safe operating area diode (SOA)

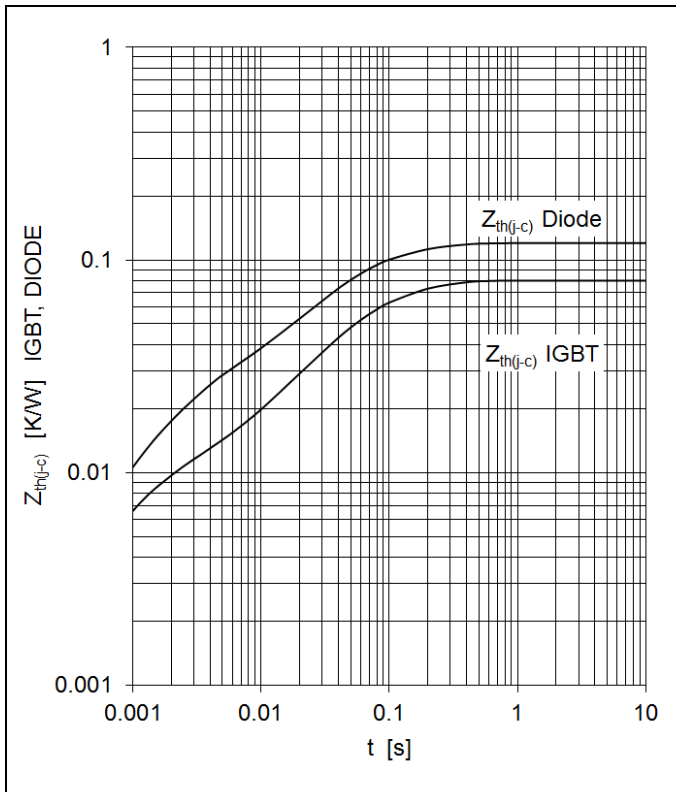


Fig. 16 Thermal impedance vs. time

Analytical function for transient thermal impedance:

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

| | | | | | | |
|-------|---------------|------|------|------|--|--|
| IGBT | R_i (K/kW) | 8.1 | 44.2 | 27.7 | | |
| | τ_i (ms) | 0.9 | 40.2 | 136 | | |
| DIODE | R_i (K/kW) | 20.2 | 30.9 | 68.9 | | |
| | τ_i (ms) | 1.8 | 137 | 37.2 | | |

Related documents:

- 5SYA 2042 Failure rates of IGBT modules due to cosmic rays
- 5SYA 2045 Thermal runaway during blocking
- 5SYA 2053 Applying IGBT
- 5SYA 2058 Surge currents for IGBT diodes
- 5SYA 2093 Thermal design and temperature ratings of IGBT modules
- 5SYA 2098 Paralleling of IGBT modules

ABB Switzerland Ltd.
Semiconductors
Fabrikstrasse 3
CH-5600 Lenzburg
Switzerland

Phone: +41 58 586 1419
Fax: +41 58 586 1306
E-Mail: abbsem@ch.abb.com
Internet: www.abb.com/semiconductors

We reserve the right to make technical changes or to modify the contents of this document without prior notice.

We reserve all rights in this document and the information contained therein. Any reproduction or utilization of this document or parts thereof for commercial purposes without our prior written consent is forbidden.

Any liability for use of our products contrary to the instructions in this document is excluded.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IGBT Modules category](#):

Click to view products by [ABB manufacturer](#):

Other Similar products are found below :

[F3L100R07W2E3_B11](#) [F3L400R07ME4_B22](#) [F4-50R07W2H3_B51](#) [FB15R06W1E3](#) [FB20R06W1E3_B11](#) [FD1000R33HE3-K](#)
[FD400R12KE3](#) [FD400R33KF2C-K](#) [FD401R17KF6C_B2](#) [FD-DF80R12W1H3_B52](#) [FF200R06YE3](#) [FF450R12ME4P](#) [FF600R12IP4V](#)
[FP06R12W1T4_B3](#) [FP10R06W1E3_B11](#) [FP15R12W2T4](#) [FP20R06W1E3](#) [FP75R07N2E4_B11](#) [FS10R12YE3](#) [FS150R07PE4](#) [FS150R12PT4](#)
[FS20R06W1E3_B11](#) [FS50R07N2E4](#) [FS50R07N2E4_B11](#) [FZ1000R33HE3](#) [FZ1800R17KF4](#) [DD250S65K3](#) [DF1000R17IE4](#)
[DF1000R17IE4D_B2](#) [DF1400R12IP4D](#) [DF200R12PT4_B6](#) [DF400R07PE4R_B6](#) [BSM75GB120DN2_E3223c-Se](#) [F3L300R12ME4_B22](#)
[F3L75R07W2E3_B11](#) [F4-50R12KS4_B11](#) [FD1400R12IP4D](#) [FD200R12PT4_B6](#) [FD800R33KF2C-K](#) [FF150R12ME3G](#) [FF300R17KE3_S4](#)
[FF300R17ME4_B11](#) [FF401R17KF6C_B2](#) [FF650R17IE4D_B2](#) [FF900R12IP4D](#) [FF900R12IP4DV](#) [FP30R06W1E3_B11](#) [FP50R07N2E4_B11](#)
[FS100R07PE4](#) [FS150R07N3E4_B11](#)