

Unshielded Radial Power Inductor

AIUR-06 Series

 RoHS/RoHS II Compliant



18.03 x ϕ 13.0mm

FEATURES:

- Ferrite core with heat shrink tube
- High Reliability

APPLICATIONS:

- Switching Power Supplies
- Noise Filtering
- DC to DC Converters
- Electronic Household Appliances
- Buzzers and Alarm Systems
- Television and Audio Equipment

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N:	AIUR-06 Series
Operating temperature:	-25°C ~ +85°C
Storage temperature:	-25°C ~ +85°C

Part Number	Inductance	Tolerance	DCR (Max)	Saturation Current (Max)	Temperature Rise Current (Max)	Inductance Code
Units	μ H	%	Ω	A	A	
Symbol	L	K	DCR	Isat	Idc	
AIUR-06-3R9	3.9	K	0.016	14.2	6.5	3R9K
AIUR-06-4R7	4.7	K	0.018	13.0	6.2	4R7K
AIUR-06-5R6	5.6	K	0.021	11.0	5.9	5R6K
AIUR-06-6R8	6.8	K	0.023	10.0	5.6	6R8K
AIUR-06-8R2	8.2	K	0.026	9.5	5.3	8R2K
AIUR-06-100	10	K	0.031	8.8	5.0	100K
AIUR-06-120	12	K	0.036	7.9	4.6	120K
AIUR-06-150	15	K	0.040	7.1	4.4	150K
AIUR-06-180	18	K	0.041	7.4	4.2	180K
AIUR-06-220	22	K	0.043	6.1	4.0	220K
AIUR-06-270	27	K	0.046	5.5	3.8	270K
AIUR-06-330	33	K	0.051	5.2	3.6	330K
AIUR-06-390	39	K	0.054	4.5	3.3	390K
AIUR-06-470	47	K	0.063	4.1	3.2	470K
AIUR-06-560	56	K	0.075	3.8	2.7	560K
AIUR-06-680	68	K	0.078	3.5	2.4	680K
AIUR-06-820	82	K	0.088	3.1	2.2	820K
AIUR-06-101	100	K	0.108	2.8	2.1	101K
AIUR-06-121	120	K	0.127	2.6	2.0	121K
AIUR-06-151	150	K	0.162	2.4	1.9	151K
AIUR-06-181	180	K	0.228	2.1	1.6	181K
AIUR-06-221	220	K	0.252	1.9	1.5	221K
AIUR-06-271	270	K	0.270	1.75	1.4	271K
AIUR-06-331	330	K	0.394	1.62	1.3	331K
AIUR-06-391	390	K	0.416	1.40	1.1	391K
AIUR-06-471	470	K	0.568	1.30	1.0	471K
AIUR-06-561	560	K	0.650	1.20	0.95	561K
AIUR-06-681	680	K	0.740	1.10	0.82	681K
AIUR-06-821	820	K	1.0	0.96	0.75	821K
AIUR-06-102	1000	K	1.2	0.88	0.65	102K
AIUR-06-122	1200	K	1.5	0.80	0.61	122K
AIUR-06-152	1500	K	1.7	0.72	0.54	152K
AIUR-06-182	1800	K	1.8	0.66	0.46	182K
AIUR-06-222	2200	K	2.4	0.60	0.41	222K
AIUR-06-272	2700	K	2.8	0.54	0.39	272K
AIUR-06-332	3300	K	3.7	0.48	0.35	332K
AIUR-06-392	3900	K	5.0	0.42	0.31	392K
AIUR-06-472	4700	K	5.6	0.40	0.28	472K
AIUR-06-562	5600	K	6.3	0.37	0.25	562K
AIUR-06-682	6800	K	8.4	0.34	0.22	682K
AIUR-06-822	8200	K	9.6	0.31	0.20	822K
AIUR-06-103	10000	K	10.5	0.29	0.16	103K
AIUR-06-123	12000	K	14.5	0.25	0.13	123K
AIUR-06-153	15000	K	20.5	0.23	0.10	153K

Test Conditions and equipments

Test frequency: 1kHz, 0.1Vrms

Isat: max. 10% inductance drop from initial value

IDC: The DC current at which the temperature rise is 40°C max

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 05.25.2016

Unshielded Radial Power Inductor

AIUR-06 Series

 RoHS/RoHS II Compliant



PART IDENTIFICATIONS:

AIUR-06-


Inductance Code

Please refer to the Electrical Spec Table

Tolerance

K: ±10%

OUTLINE DRAWING:

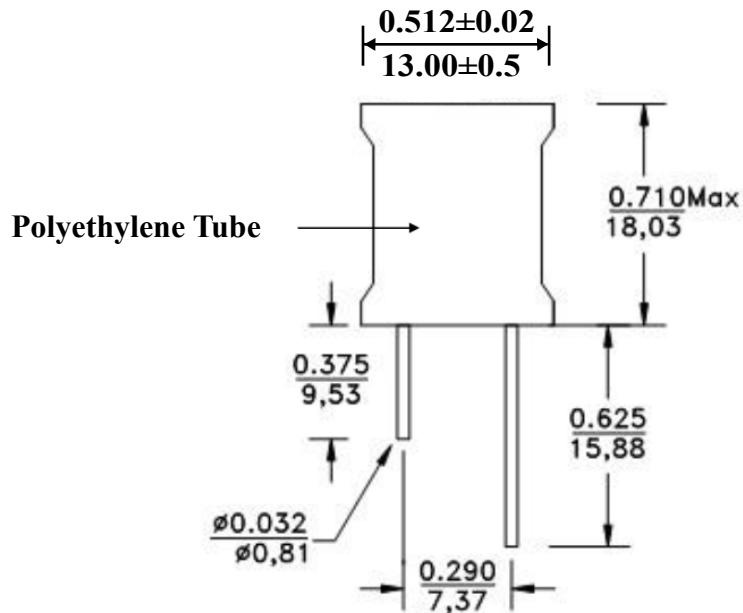

Dimension: mm

Packing (250pcs / Box)

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 05.25.2016**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)