# LONG RANGE RFID TAG IDEAL FOR METAL SURFACES



## **ART915X3030YZ30-IC**

30.0 x 30.0 x 3.7 mm



MSL=1

### **FEATURES**

- 4.0 meters read range on metal surfaces
- Wide -30°C to 85°C operating temperature range
- UHF band operation 902 to 928MHz
- Matched for lowest return loss at 915MHz
- Tag incorporates matched Alien H3 RFIC
- 30.0 x 30.0 x 3.7mm height ceramic tag
- ISO 18000-6C/EPC Class1 Gen2 compliant
- Peel & Stick easy installation
- Suitable for non-metal surfaces
- Robust, long life over wide temperature range

### **APPLICATIONS**

- Asset tracking: vehicles, machinery, tools, steel containers, servers, etc.
- Product inventory management: metallic assemblies, chassis, doors, equipment, etc.
- Industrial Internet of Things (IIoT)
- Automatic Vehicle Identification (AVI)
- Wildlife Identification and Waste Management
- Long distance RFID /Non-Stop Access Control

### STANDARD SPECIFICATIONS

PARAMETERS	MINIMUM	TYPICAL	MAXIMUM	UNITS	NOTE
Range of Receiving Frequency	902-928			MHz	
Frequency of Lowest Return Loss	915±5			MHz	(Based On 200 x 200mm GND Plane)
Polarization	Linear				
IC Protocol	IS0 18000-6C/EPC Class1 Gen2			Bits	
Memory	96 EPC			Bits	
	512 User			Bits	
IC Type	Alien H3				
Reading Range		4.0		m	
Working Temperature	-30		+85	$^{\circ}\mathrm{C}$	
Storage Temperature	-40		+110	°C	
Frequency Temperature Coefficient		0±10		ppm/°C	
ESD (HBM)			2	KV	2KV Class 2 HBM



5101 Hidden Creek Lane Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sale please visit: www.abracon.com **REVISED:** 07/19/2018

ABRACON IS ISO9001-2015 CERTIFIED

# LONG RANGE RFID TAG IDEAL FOR METAL SURFACES



## ART915X3030YZ30-IC


30.0 x 30.0 x 3.7 mm



MSL=1


### MECHANICAL DIMENSIONS (ALL DIMENSIONS ARE IN mm)

Tolerances are ±0.2mm, unless otherwise specified\*

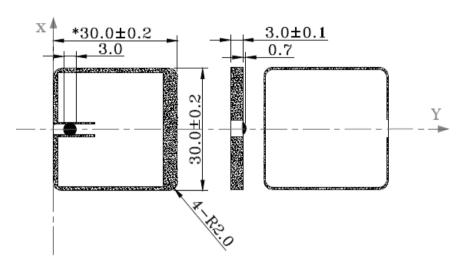

Mounting: Mounted with adhesive/tape (not included).

### **PACKAGING**

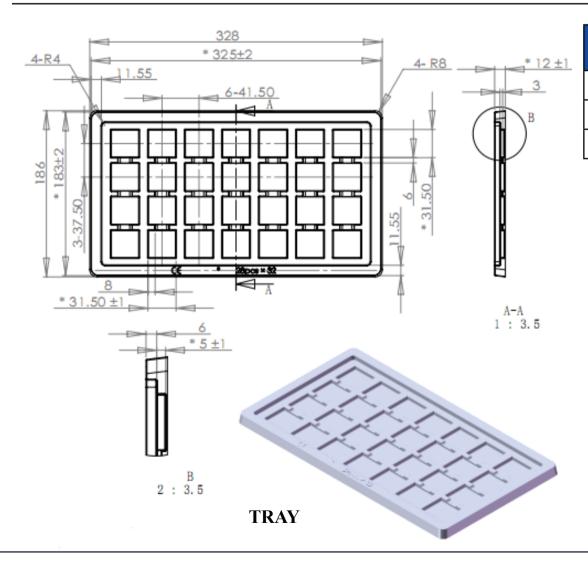

PACKAGE TYPE	QUANTITY		
Tray	28 pcs/tray		
Vacuum Bag	196pcs/ Vacuum Bag		
MOQ	196pcs		

**REVISED:** 07/19/2018

ABRACON IS ISO9001-2015 CERTIFIED



5101 Hidden Creek Lane Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sale please visit: www.abracon.com

# LONG RANGE RFID TAG IDEAL FOR METAL SURFACES



## ART915X3030YZ30-IC

30.0 x 30.0 x 3.7 mm



MSL=1

### **CAUTION**

- 1. Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- 2. Do not expose the component to open flame.
- 3. This specification applies to the functionality of the component as a single unit. For optimal performance, in-circuit validation is recommended.
- 4. Electrostatic sensitive device; observe standard precautions for handling.

#### **NOTES**

- 1. The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2. ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- 3. In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- 4. When changing your production process post-validation, please notify ABRACON immediately.
- 5. ABRACON's products are COTS Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property damage.
- 6. All specifications and Marking will be subject to change without notice.



**REVISED:** 07/19/2018

ABRACON IS ISO9001-2015 CERTIFIED

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for NFC/RFID Tags & Transponders category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below:

PCF7941ATSM2AB120, PNEV512B,699 V680-D1KP54T V680S-A40 50M PN7120A0EV/C10801Y TRPGR30ATGA SPS1M003B SPS1M003A SPS1M002B SPS1M002A V680S-A40 10M V680-D1KP66T ATA5577M2330C-DBQ SL2S5302FTBX LXMSJZNCMD-217 60208 60170 P5DF081X0/T1AD2060 MF1S5030XDA8/V1J MF1S7030XDA4/V1J HT1MOA4S30/E/3J HT2MOA4S20/E/3/RJ MFRC52302HN1,157 TRPGR30ATGB NRF51822-QFAA-R 20926410601 CLRC66303HNE ART915X1620TX16-IC ART915X2117225TX21-IC 28448 ART923X1015YZ10-IC ART868X130903TX13 ART868X25275YZ25 ART915X0505030P-IC ART915X100202TO-IC ART915X100503JA-IC ART915X130930TX13-IC ART915X250903AM-IC ART915X2509EP60-IC ART915X252503MA-IC ART915X25275YZ25 ART915X25275YZ25 ART915X25275YZ25 ART915X25275YZ25 ART915X2509EP60-IC ART915X252503MA-IC ART915X25275YZ25 ART915X25275YZ25-IC ART923X1015YZ10 AS3932-BTST AS3933-BTST 20926410802 LXMSJZNCMF-198 MIKROE-779 13356-0571 13356-1151