

3.3V HCMOS/ TTL COMPATIBLE SMD CRYSTAL CLOCK OSCILLATOR



5.0 x 3.2 x 1.3mm

ASFL1



FEATURES:

- Tri state function
- Suitable for high density SMT
- Available tight stability option +/-20ppm
- Seam sealed package assures high reliability performance
- Suitable for RoHS compliant reflow process

APPLICATIONS:

- CCD clock for VTR camera
- Equipment connected to PC or PC cards
- Thin equipment
- Wireless communication
- PDA, Laptop computer

STANDARD SPECIFICATIONS:

Parameters		Minimum	Typical	Maximum	Units	Notes
Frequency Range		0.321	-----	133.33	MHz	
Operating Temperature		-10	-----	+70	°C	See options
Storage Temperature		-55	-----	+125	°C	
Overall Frequency Stability		-100	-----	+100	ppm	See options
Supply Voltage (Vdd)		2.97	3.3	3.63	V	
Input Current	0.321MHz ~ 29.9MHz	-----	8	15	mA	
	30MHz ~ 79.9MHz	-----	20	45		
	80MHz ~ 133.33MHz	-----	28	85		
Symmetry (@ 1/2Vdd)		40	50	60	%	See options
Rise and Fall Time (Tr/Tf)	0.321MHz ~ 29.9MHz	-----	5	10	ns	
	30MHz ~ 79.9MHz	-----	5	7		
	80MHz ~ 133.33MHz	-----	3	7		
Output Load		-----	-----	15	pF	
		-----	-----	5	TTL	
Output Voltage	VOH	0.9*Vdd	-----	-----	V	
	VOL	-----	-----	0.1*Vdd	V	
Tri-state Function	VIH	0.7*Vdd	-----	-----	V	"1" or Open: Oscillation
	VIL	-----	-----	0.3*Vdd	V	"0": Output disable (Hi Z)
Disable Current				10	µA	
Start-up Time	0.321MHz ~ 29.9MHz	-----	1	10	ms	
	30MHz ~ 79.9MHz	-----	3	10		
	80MHz ~ 133.33MHz	-----	3	10		
Phase Jitter RMS (12kHz to 20MHz)		-----	-----	1	ps	Reference only. Please contact Abracon for specific frequencies
Aging		-5.0	-----	+5.0	ppm	@+25°C First year

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

ASFL1- MHz - -

Frequency in MHz
e.g. 24.576MHz
14.31818MHz
26.000MHz

Operating Temp.
I: 0°C ~ +50°C
D: -10°C ~ +60°C
E: -20°C ~ +70°C
F: -30°C ~ +70°C
N: -30°C ~ +85°C
L: -40°C ~ +85°C

Freq. Stability
J: ± 20 ppm(*)
R: ± 25 ppm
K: ± 30 ppm
H: ± 35 ppm
B: ± 40ppm
C: ± 50 ppm

Symmetry
Blank: 40/60% @1/2Vdd
S: 45/55% @1/2Vdd

(*) Temp option I, D, E and -10°C ~ +70°C only.

Packaging
Blank: Bulk
T: 1000pcs/reel
T2: 250pcs/reel

ABRACON IS
ISO9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 04.13.11**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

3.3V HCMOS /TTL COMPATIBLE SMD CRYSTAL CLOCK OSCILLATOR





5.0 x 3.2 x 1.3mm

ASFL1



OUTLINE DRAWING:

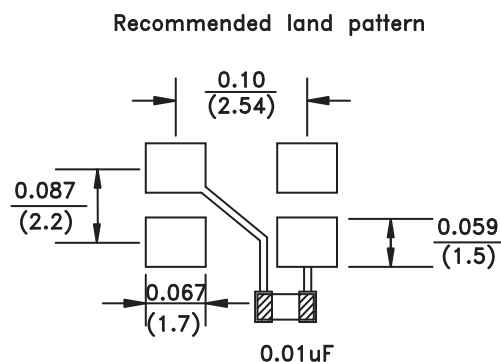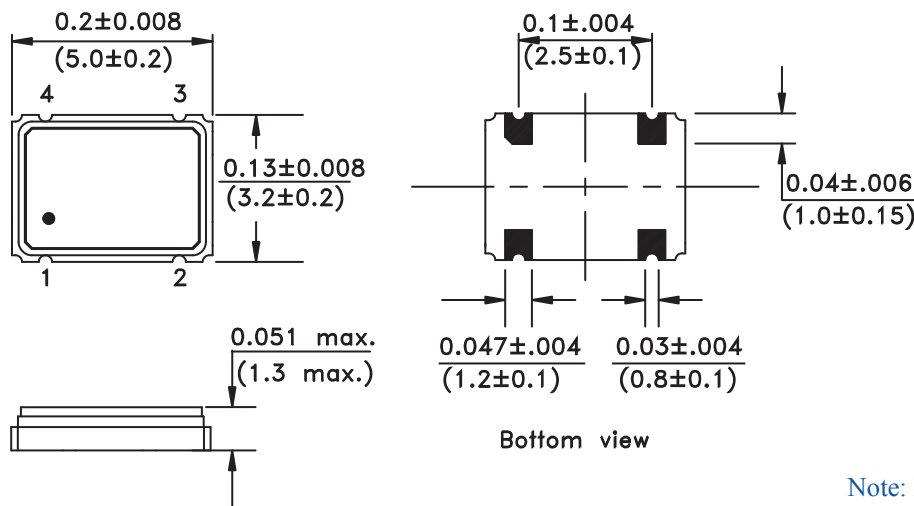

Pin	Function
1	Tri-State
2	GND
3	Output
4	Vdd


Note: Recommend using an approximately 0.01 μF bypass capacitor between PIN 2 and 4.

Dimensions: inches (mm)


TAPE & REEL:

T= Tape and reel (1,000pcs/reel)
T2= Tape and reel (250pcs/reel)

Dimensions: mm

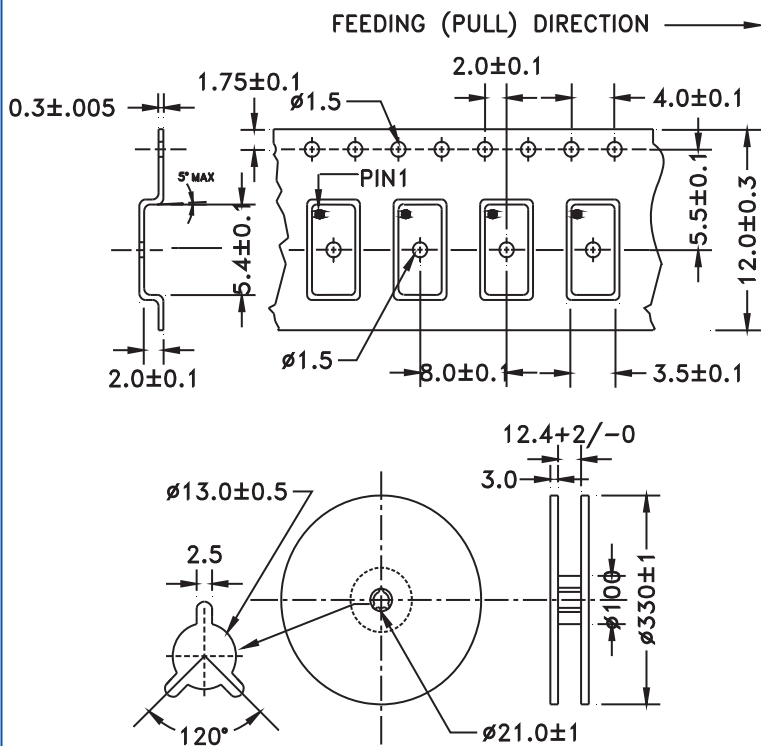

REFLOW PROFILE:

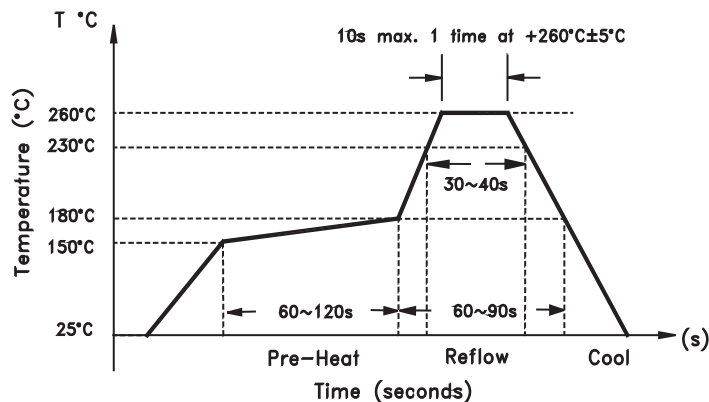

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 04.13.11**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [ASF1-3.686MHZ-N-K-S](#) [ASV-4.000MHZ-LCS-T](#) [XLH735025.000JU4I8](#) [XLP725125.000JU6I8](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SiT8503AI-18-33E-0.200000X](#) [SIT8918AA-11-33S-16.000000G](#) [SIT9122AI2C233E300.000000X](#) [XO37CTECNA20M](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [632L3I004M00000](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#)