


ADTS3 SERIES

3.5 x 6mm TACT SWITCH

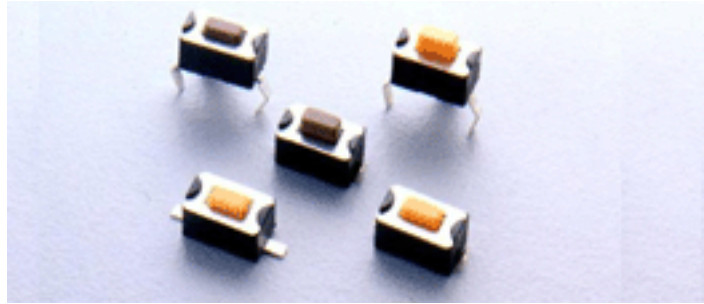

FEATURES

- Sharp click feel with a positive tactile feedback.
- Ultraminiature structure suitable for high density mounting. Economic but high reliability.
- Insert molded contacts with special treatment prevents flux build-up during soldering and permits auto-dipping.

MATERIALS

COVER:	Stainless Steel.
BASE:	UL94V-0 Nylon, High Temperature Thermoplastic. Color: Black
STEM:	UL94V-0 Nylon, High Temperature Thermoplastic. Color: Brown(160gf), Red(260gf), Salmon(320gf), Yellow(520gf)
DOMECONTACT:	Stainless with silver cladding.
TERMINALS:	Brass with silver plated.

GENERAL SPECIFICATIONS

ELECTRICALS

Electrical life:	50,000 cycles for 160gf, 320gf. 30,000 cycles for 260gf, 520gf.
Rating:	50 mA, 12 VDC.
Contact resistance:	100 milliohms max.
Insulation resistance:	100 megohms min. 500 VDC.
Dielectric Strength:	250 VAC /1 minute.
Contact Arrangement:	1 pole 1 throw.

MECHANICALS

Actuation Force:	520 ± 130gf Yellow (Y) 320 ± 80gf Salmon (S) 260 ± 50gf Red (R) 160 ± 50gf Brown (N)
Stroke:	0.25 + 0.2 mm - 0.1 mm
Operating Temperature Range:	-25°C to + 70°C
Storage Temperature Range:	-30°C to + 80°C
Vibration resistance:	MIL-STD-202F METHOD 201A. Frequency: 10-55-10Hz/1minute. Directions: X, Y, Z, three mutually perpendicular directions. Time: 2 hours each direction. High reliability.
Shock resistance:	MIL-STD-202F METHOD 213B. CONDITION A. Gravity: 50G (peak value), 11 msec. Direction and times: 6 sides and 3 times in each direction. High reliability.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SOLDERING PROCESSES


HAND SOLDERING: 320°C max. for 2.5 seconds max. (30 watt iron).

REFLOW SOLDERING: 260°C max.

WAVE SOLDERING: 360°C max. for 5 seconds max (1.6 mm Board thickness).

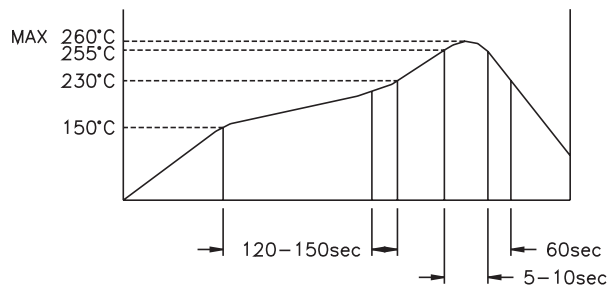

CIRCUIT



HOW TO ORDER

ADTS




3



V



B = Tube Package
 T/R = Tape & Reel
 = Bag for Thru-hole type

V = Lead Free Solerable


Color Of Stem For Operating Force:

- N = Brown, 160gf
- R = Red, 260gf
- S = Salmon, 320gf
- Y = Yellow, 520gf

Dimension H:

- 1 = 4.3mm
- 2 = 5.0mm


Product Size: 3 = 3.5 x 6mm

- M: Surface Mounting Type
- ML: Surface Mounting Type
-  : Through Hole Type


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


ADTS3

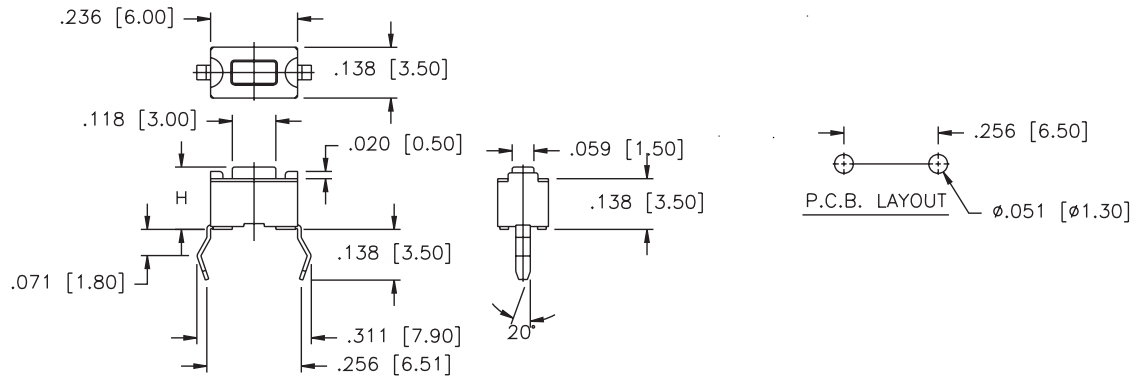

ADTSM3

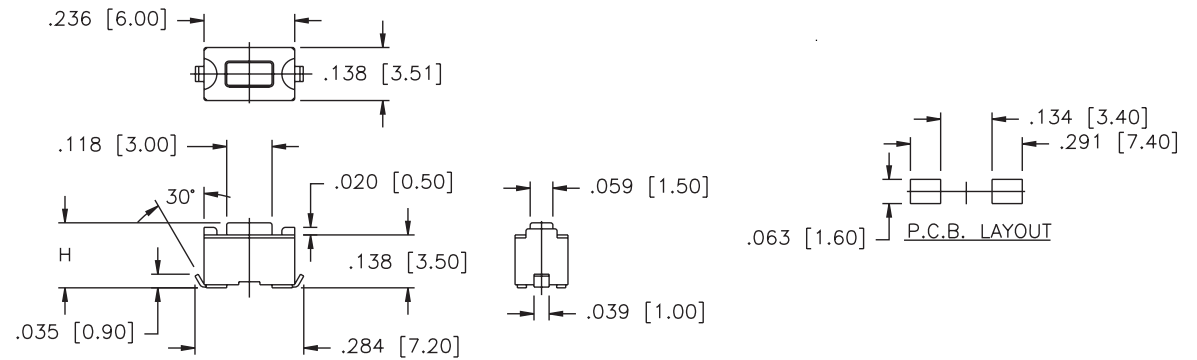

ADTSM13

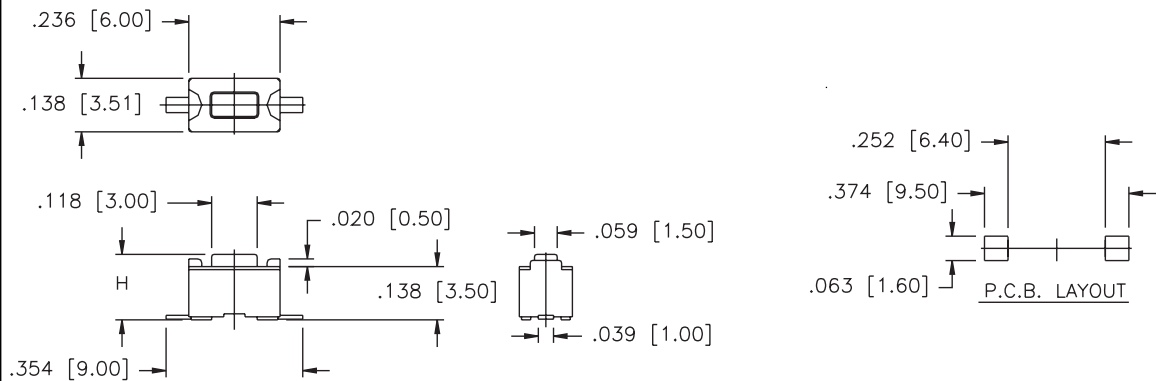

PACKAGING

Tube: 135 pcs/tube
 ADTM-31 - T/R: 1800 pcs/reel
 ADTM-32 - T/R: 1600 pcs/reel
 Bulk: 1000 pcs/bag

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [Apem](#) manufacturer:

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [CRCW04021100FRT7](#)
[CRCW04021961FRT7](#) [5800-0090](#) [CRCW04024021FRT7](#) [CRCW040254R9FRT7](#) [CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-](#)
[WHPP](#) [593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [011349-000](#) [LTLA506SBLAMNBL](#) [CRCW08052740FRT1](#) [LUC-](#)
[012S070DSM](#) [LUC-018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#) [LW1A-L1-GL](#) [LW1A-P1-GD](#)
[LW1L-A1C10V-GL](#) [LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [00-9300-RDPP](#) [CRCW2010331JR02](#) [01-1003W-8/32-10](#) [601-GP-08-](#)
[KT39](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#)