

ADAM-4510I


ADAM-4520I

ADAM-4117

Robust RS-422/485 Repeater

Robust RS-232 to RS-422/485 Converter

Robust 8-ch Analog Input Module with Modbus

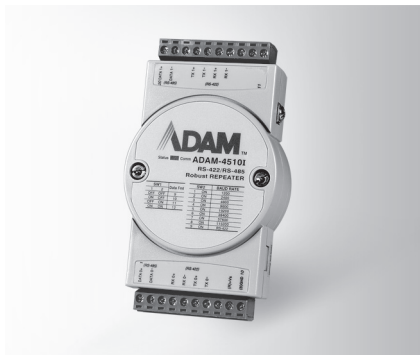

ADAM-4510I



ADAM-4520I



ADAM-4117



Specifications

General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 1.4 W @ 24 V_{DC}

Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)
- **Supports Auto Baud-Rate**
- **Provide RS-485 to RS-422 Convert Ability**

Specifications

General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485) 1 x DB9-F (RS-232)
- **Power Consumption** 1.2 W @ 24 V_{DC}

Communications

- **Input** RS-232 (DB9)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)
- **Supports Auto Baud-Rate**

Specifications

General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII Command and Modbus/RTU
- **Power Consumption** 1.2 W @ 24 V_{DC}
- **Interface (B version)** RS-485, micro USB

Analog Input

- **Channels** 8 differential and independent configuration channels
- **Input Impedance** Voltage: 800 K Ω Current: 120 Ω
- **Input Type** mV, V (supports unipolar and bipolar), mA
- **Input Range** 0 ~ 150mV, 0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, 0 ~ 15V, \pm 150 mV, \pm 500 mV, \pm 1V, \pm 5 V, \pm 10 V, \pm 15V, \pm 20 mA, 0 ~ 20 mA, 4 ~ 20mA
- **Accuracy** Voltage mode : \pm 0.1% or better Current mode : \pm 0.2% or better
- **Resolution** 16-bit
- **Sampling Rate** 10/100 samples/sec (selected by utility)
- **CMR @ 50/60 Hz** 92 dB
- **NMR @ 50/60 Hz** 60 dB
- **Over Voltage Protection** \pm 60 V_{DC}
- **High Common Mode** 200 V_{DC}
- **Span Drift** \pm 25 ppm/ $^{\circ}$ C (Typical)
- **Zero Drift** \pm 6 μ V/ $^{\circ}$ C
- **Built-in TVS/ESD Protection**

Common Specifications

General

- **Certification** FCC, CE, UL, UL Class I, Division 2, Groups A,B,C,D Hazardous Location
- **Power Input** Unregulated 10 ~ 48 V_{DC} w/power reversal protection
- **Isolation Voltage** 3,000 V_{DC}

Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** - 40 ~ 85 $^{\circ}$ C (-40 ~ 185 $^{\circ}$ F)
- **Storage Temperature** - 40 ~ 85 $^{\circ}$ C (-40 ~ 185 $^{\circ}$ F)
- **Supports Noise Rejection**

Ordering Information

- **ADAM-4510I** Robust RS-422/485 Repeater
- **ADAM-4520I** Robust RS-232 to RS-422/485 Converter
- **ADAM-4117** Robust 8-ch Analog Input Module with Modbus

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[IFD8520](#) [cPCI-3544](#) [422CON](#) [ATX6022/14GP7](#) [ATX6022/8](#) [AX93221-24/48](#) [FC6A-EXM2](#) [OPT8AP-AE](#) [96RMKVM-19V1C-A](#) [60016-011](#) [60016-014](#) [60006-008](#) [60011-075](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-17V1C-A](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-17V8C-A](#) [60004-005](#) [60016-017](#) [60006-009](#) [60016-035](#) [60016-034](#) [60016-031](#) [60016-030](#) [60016-026](#) [60016-024](#) [60016-018](#) [60016-007](#) [60016-005](#) [60007-002](#) [60006-010](#) [AXX10GBTWLHW3](#) [382-BBEH](#) [555-BDCL](#) [K6CMISZBI52](#) [426451401-3](#) [60011-093](#) [MIC-3620/3-BE](#) [MPCIE-UART-KIT02-R20](#) [RSM232](#) [PCIE-1680-AE](#) [BB-FOSTCDRI](#) [73-544-002](#) [UC-313](#)