


# ADAM-6521 Series

**Industrial Ethernet  
Switches with 4 x  
10/100Base-TX Ports  
& 1 x 100Base-FX  
Fiber Optic Port**

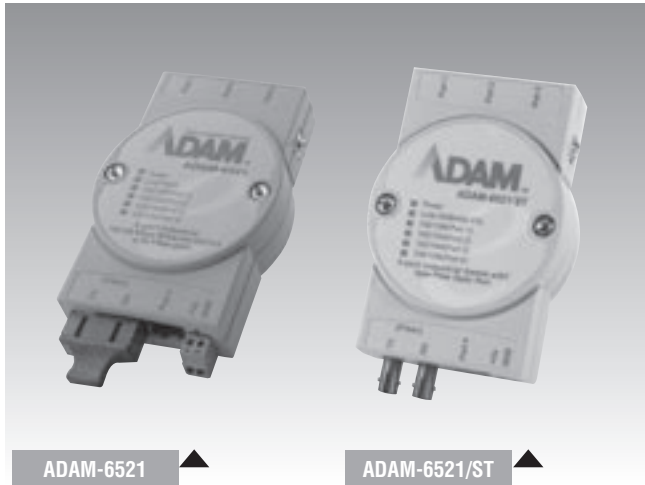

CE FCC

## Features

- Provides 4 x 10/100 Mbps Ethernet ports with RJ-45 connector
- Provides 1 x 100 Mbps multi/single-mode fiber port with SC/ST connector
- Supports full/half duplex flow control
- Supports Integrated Loop-up engine
- Supports MDI/MDI-X auto crossover
- Provides broadcast storm protection
- Supports +10 ~ 30 V<sub>DC</sub> voltage power input
- Supports 4,000 V<sub>DC</sub> Ethernet ESD protection
- Provides flexible mounting: DIN-rail, Wall, Stack
- Supports operating temperatures from -10 ~ 65° C

## Introduction

ADAM-6521 and ADAM-6521S are industrial-grade Ethernet switch with a fiber optic port that makes it possible to expand industrial networks fast and cost-effectively. ADAM-6521 and ADAM-6521S of 1 fiber port and 4-RJ-45 ports. With fiber optics, you can prevent noise interfering with your system and implement transmission distances up to 15 km.

ADAM-6521 and ADAM-6521S are especially suited for industrial environments with Ethernet networking needs such as: semi-conductor factories, inventory control environments, assembly line and production and more.

ADAM-6521 and ADAM-6521S support a wide voltage range of +10 ~ 30 V<sub>DC</sub> over the terminal block, and 3,000 V<sub>DC</sub> surge (EFT) protection to protect it from being damaged by over-voltage. A wide operating temperature range from -10 to 65° C (14 ~ 149° F), makes it functional in harsh operating environments. They also have six inclusive LED indicators which make troubleshooting the ADAM-6521 and ADAM-6521S easier. Each port has a pair of LEDs that indicate link status and transmission speed. This function conveniently informs users of any collisions, the link status, power failure and data receipts for immediate on-site diagnostics.

## Specifications

### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x
- **LAN** 10/100Base-T, 100Base-FX
- **Transmission Distance** Ethernet : Up to 100 m  
Multi-mode Fiber : Up to 2 km  
(ADAM-6521, ADAM-6521/ST)  
Single-mode Fiber : Up to 15 km (ADAM-6521S)
- **Transmission Speed** Up to 100 Mbps

### Interface

- **Connectors** 4 x RJ-45, 1 x SC type fiber connector (ADAM-6521, ADAM-6521S) or 1 x ST type fiber connector (ADAM-6521/ST)  
2-pin removable screw terminal (power)
- **LED Indicators** Power, Link (100Base-FX), 100/10M (Ethernet)

### Power

- **Power Consumption** ADAM-6521, ADAM-6521/ST: Max. 3 W  
ADAM-6521S: Max. 4 W
- **Power Input** 1 x Unregulated 10 ~ 30 V<sub>DC</sub>

### Mechanism

- **Dimensions (W x H x D)** 70 x 112 x 27 mm
- **Enclosure** IP30, ABS+PC with solid mounting kits
- **Mounting** DIN 35 rail, Wall, Stack

### Protection

- **ESD (Ethernet)** 4,000 V<sub>DC</sub>
- **Surge (EFT for power)** 3,000 V<sub>DC</sub>

### Environment

- **Operating Temperature** -10 ~ 65° C (14 ~ 149° F)  
stack : -10 ~ 60° C (14 ~ 140° F)
- **Storage Temperature** -20 ~ 80° C (-4 ~ 176° F)
- **Operating Humidity** 20 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 1,150,000 hrs

### Certifications

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMC** U.S.A.: FCC Part 15 CISPR 22  
EU: EN55011, EN61000-6-4  
EN55022 Class A,  
EN61000-3-2/3,  
EN55024,  
IEC61000-4-2/3/4/5/6/8/11  
EN61000-6-2

## Ordering Information

- **ADAM-6521** Industrial Ethernet Switch with 4 x 10/100Base-TX Ports & 1 Multi-mode SC Type Fiber Optic Port
- **ADAM-6521/ST** Industrial Ethernet Switch with 4 x 10/100Base-TX Ports & 1 Multi-mode ST Type Fiber Optic Port
- **ADAM-6521S** Industrial Ethernet Switch with 4 x 10/100Base-TX Ports & 1 Single-mode SC Type Fiber Optic Port

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [I210T1BLK](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC](#)  
[EXTENDER 2001](#) [ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [7000-P3201-P050150](#) [750-1515](#) [750-494](#) [750-495](#) [750-497](#) [750-501](#) [750-612](#)  
[750-613](#) [750-627](#) [750-643](#) [750-940](#) [753-440](#) [753-540](#) [753-650/003-000](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-](#)  
[0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-](#)  
[4FP-AE](#) [2352903-2](#) [753-620](#) [EGU-0702-SFP-T](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [SW-525](#) [SW-725](#) [7000-74712-4780030](#) [7000-74712-](#)  
[4780060](#) [7000-74712-4780100](#) [7000-74712-4780150](#)