

ARK-1122H

Intel® Atom™ Dual Core N2600 with Independent Dual Displays Fanless Box PC

NEW



Features


- Intel® Atom™ Dual Core N2600, 1.6 GHz
- Palm-size form factor : 133.8(W) x 43.1(H) x 94.2(D) mm
- Supports independent dual displays interfaces : VGA + HDMI
- Supports 1 x GbE and 4 USB 2.0 ports
- Supports 1 x RS-232 and Audio line in / line out
- Supports mSATA and/or 2.5" SATA HDD bay
- Wide operating temperature -20 ~ 60° C support
- Optional VESA / DIN-Rail / Wall mounts
- Lockable DC jack design
- Supports SUSIAccess and Embedded Software APIs




Specifications

ARK-1122H-S6A1E		
Processor System	CPU	Intel Atom Dual Core N2600 1.6 GHz
	L2 Cache	1MB
	System Chipset	Intel NM10
	BIOS	AMI EFI 16 Mbit
Memory	Technology	DDR3 800 MHz up to 4 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Chipset	Intel Atom N2600
	Interface	VGA (1920 x 1200) HDMI (1920 x 1200) with lockable design (please choose the lockable HDMI cable)
Ethernet	LAN	1 x 10/100/1000 Mbps Intel 82583V GbE, supports wake on LAN
Audio	Chipset	Realtek ALC892, High Definition Audio (HD)
	Interface	Line-in and Line-out
I/O Interface	Serial Ports	1 x RS-232
	USB Interface	4 x USB ports, USB2.0 Compliant
Other	Watchdog timer	255-level timer interval, setup by software
Expansion	Others	1 x half-size Mini PCIe supports WIFI only
Storage	2.5" HDD/SSD	1 x SATA II HDD Bay
	mSATA	1 x full-size Mini PCIe slot, colay with USB signal
Software Support	Microsoft Windows	Windows 7 Pro 32bit, WES7 32bit, XP Embedded (XP Embedded by project support)
	Power Input Voltage	12 V _{DC} , ± 10%
Power Requirement	DC Jack Type	Support lockable design
	Power Adaptor	AC to DC, DC12 V/3 A, 36 W with lockable design
Power Consumption	Typical	6.89 W
	Max	11.45 W
Mechanical	Construction	Aluminum housing
	Mounting	Support VESA/DIN Rail/Wall mounting (Optional)
	Dimensions (W x H x D)	133.8 x 43.1 x 94.2 mm (5.27" x 1.7" x 3.71")
Environmental and Certifications	Operating Temperature	With standard temperature HDD/SSD/mSATA devices: 0 ~ 40° C with 0.7 m/s air flow With extended temperature SSD/mSATA devices: -20 ~ 60° C with 0.7 m/s air flow
	Storage Temperature	-40 ~ 85° C
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With SSD/mSATA: 3Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1hr/axis
	Shock During Operation	With SSD/mSATA:30Grms, IEC 60068-2-27, half sine, 11ms duration
	EMC	CE/FCC Class A, CCC, BSMI
	Safety Certifications	CB, UL, CCC, BSMI

Dimensions

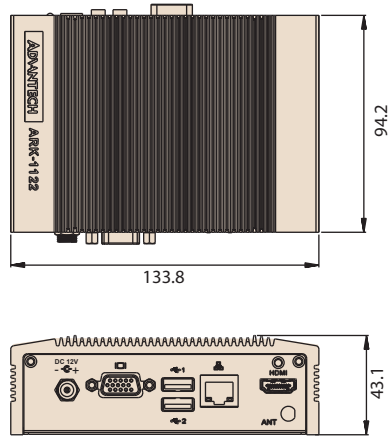


DIN Rail




Unit: mm


VESA mount




Wall mount



Front Panel External I/O Mechanical Layout/Drawing

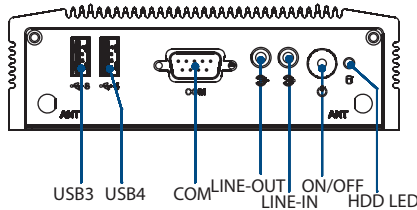

Rear Panel External I/O Mechanical Layout/Drawing

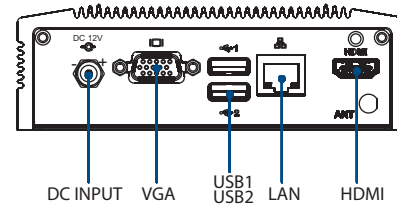

Ordering Information

Part Number	Intel CPU	RAM	VGA	HDMI	Audio	GbE	2.5" HDD bay	mSATA Storage	USB 2.0	RS-232	RS-232/422/485	MiniPCIe	Operating Temp.	OS
ARK-1122H-S6A1E	Atom N2600 1.6GHz	Up to 4GB	1	1	Line in Line out	1	1	1 (F/S)	4	1	N/A	1 Half size	-20 ~ 60° C	-
ARK-1122HS-S6A1E	Atom N2600 1.6GHz	2GB Built in	1	1	Line in Line out	1	500GB HDD built in	1 (F/S)	4	1	N/A	1 Half size	0 ~ 40° C	WES7 Built-in

Note: Memory, storage and operating system bundled by request.

Packing List

Part Number	Description
-	1 x ARK-1122 unit
-	1 x Driver/Utility CD/Manual
-	1 x Traditional Chinese user manual for CCC
-	1 x China RoHS
96PSA-A36W12W7	1 x AC to DC adapter DC 12V/3A 36W, -20 ~ 60° C

Embedded OS (Only available for T-Parts OEM, and CTOS service)

Part Number	Description
2070011879	WES7E 32bit for ARK-1122H & ARK-1122F

Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180cm, USA type
170203183C	Power Cable 3-pin 180cm, Europe type
170203180A	Power Cable 3-pin 180cm, UK type
1700008921	Power Cable 3-pin PSE Mark 183cm
AMK-V003E	ARK-112X series VESA mounting kit
AMK-R001E	ARK-112X series DIN-rail mounting kit
AMK-W001E	ARK-112X series Wall mounting kit
1700023855-01	1M lockable HDMI cable
1700023856-01	3M lockable HDMI cable

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#)
[ROScube-I, IntelR Core? i7, RQI-57](#) [AIMB-T1215DA-00Y0E](#) [AIMB-T1217DW-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#)
[APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-](#)
[10A1E](#) [ITA-1711-10A1E](#) [MIC-720AI-00A1](#) [UNO-247-J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#)
[EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-I7](#) [SI-606](#) [SI-60E](#) [ITG-100-AL-E1/2GB/S-R10](#)