

EKI-2741FPI EKI-2742FPI

Industrial Grade IP31 Gigabit Media Converter Series



Features

- Supports multi-rate for SFP slot
- IEEE 802.3af/at compliant
- Power input 48 V_{DC}, supply 30W per port
- Provides slim size and DIN-rail/Wall mount with IP31 metal mechanism
- Supports operating temperatures from -40 to 75°C

Introduction

With the technology of PoE (Power over Ethernet), we can transfer both data and electrical power to Ethernet-enabled devices using a standard CAT5 cable. EKI-2741FPI / EKI-2742FPI are compliant IEEE 802.3af/at and supply to 30W for PD device. This product can operate in a wide range of Temp. between -40 to 75°C.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3af/at, 802.3ab
- **LAN** 10/100/1000Base-T (X)
- **Transmission Distance** Ethernet: Up to 100 m
- **Transmission Speed** Up to 1000 Mbps

Interface

- **Connectors** 100/1000Base-X (SFP)
10/100/1000Base-T/TX
2-pin removable screw terminal
- **LED Indicators** PWR, PoE Status, Link/Activity

Power

- **Power Consumption** EKI-2741FPI: Max. 34 W (Full load PoE+)
EKI-2742FPI: Max. 63.5 W (Full load PoE+)
- **Power Input** 48 V_{DC} (Single input)
- **Power Output** 30W

Mechanism

- **Dimensions (W x H x D)** 36.7 x 108.4 x 103.5 mm (1.44" x 4.27" x 4.07")
- **Enclosure** IP31, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

Protection

- **Power Reverse** Present
- **Overload current** Present

Environment


- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 743,594 hours (EKI-2741FPI)
717,339 hours (EKI-2742FPI)

Certification

- **Safety** UL/cUL 508 Class I, Division 2, Groups A, B, C and D
- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Patent** <http://www.advantech.com/legal/patent>

Dimensions

Unit: mm [inch]

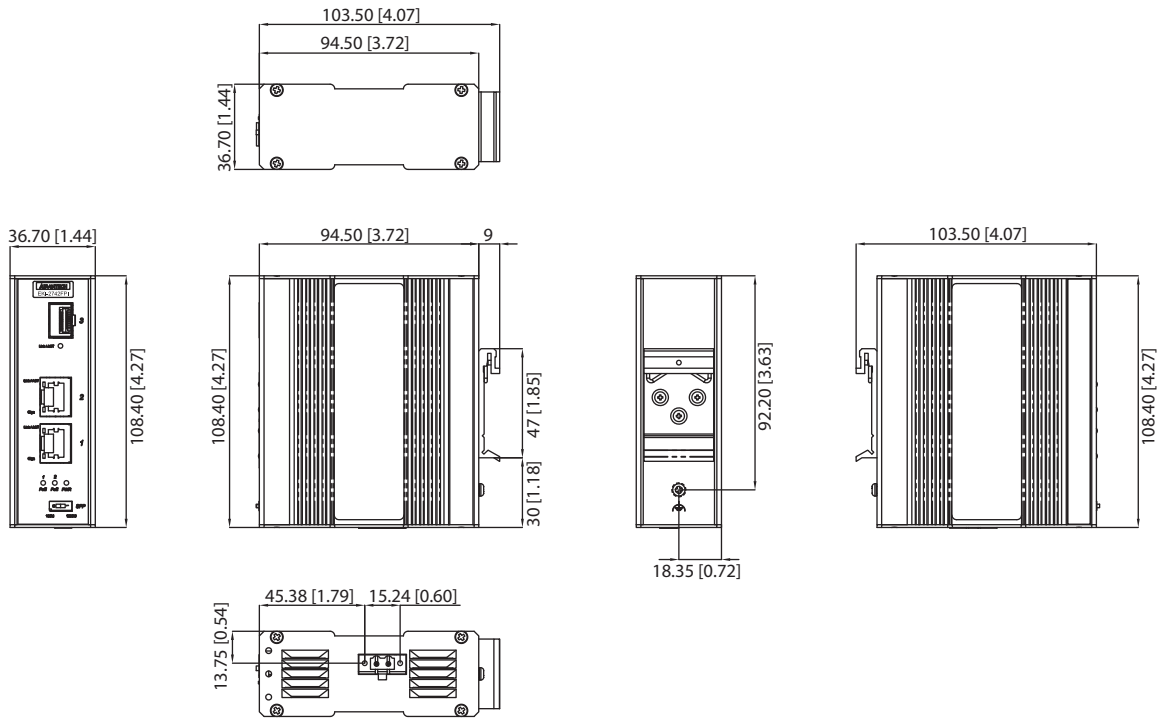

Panel Cut-out Dimensions: 36.7 x 108.4 x 103.5 mm (1.44" x 4.27" x 4.07")

Ordering Information

- **EKI-2741FPI-AE** Gigabit Media Converter SFP with 1x PoE 802.3at
- **EKI-2742FPI-AE** Gigabit Media Converter SFP with 2x PoE 802.3at

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Media Converters](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[EIS-PS-US](#) [CF-020010-009](#) [EIS-EXTEND-C-EU](#) [DT-51190.5m](#) [DT5002F](#) [WT32-ETH01](#) [USR-K6](#) [WC-PD13F012A](#) [WC-PD30B050G](#) [CF-020011-2N9](#) [EKI-1751-AE](#) [EKI-1751PI-M-AE](#) [EKI-1751PI-R-AE](#) [EKI-2541M-AE](#) [EKI-2541MI-AE](#) [EKI-2541S-AE](#) [EKI-2541SI-AE](#) [EKI-2741F-BE](#) [EKI-2741FI-BE](#) [EKI-2741FL-US-AE](#) [EKI-2741LX-AE](#) [CA-628485-D84](#) [CA-628485-D85](#) [CF-020008-000](#) [CF-020008-001](#) [CF-020010-721](#) [CF-020010-97X](#) [CF-020011-1N9](#) [CF-020011-32N](#) [CF-020011-330](#) [CF-901201-097](#) [CTC-55F005-NW](#) [102MCE-SC-15](#) [850-15526](#) [855-10932](#) [856-15410](#) [857-11912](#) [IMC-350I-SE-PS-A](#) [IMC-350-MMST-PS-A](#) [IMC-350I-M8ST-PS-A](#) [IMC-350I-MM-A](#) [IMC-350I-SE-A](#) [IMC-350I-M8-A](#) [IMC-370-MM-PS-A](#) [IMC-370I-MM-PS-A](#) [IMC-370I-SST-PS-A](#) [CTM1051KAT](#) [CTM8251KAT](#) [MS8PD](#) [MS8S2G](#)