

# WISE-4610

## Advanced Industrial LoRa/LoRaWAN Wireless I/O Module



### Introduction

LPWAN is a type of wireless telecommunication wide area network designed to allow long range communications at a low data rate among IoT applications, such as sensors operated on a battery. Its benefits is to offer multi-year battery lifetime for sensors/applications to send small amounts of data over long distances a few times per hour suitable for different environments.

Private LoRa and LoRaWAN are one of category of LPWAN which belong to the non-cellular LPWAN wireless communication network protocols enables very long range transmissions with low power consumption, operating in the non-licensed spectrum.




### Star Topology

The LoRaWAN networks in a star topology have gateway relaying the data between the sensor nodes and the network server.

Communication between the sensor nodes and the gateway goes over the wireless channel utilizing the LoRa physical layer, whilst the connection between the gateways and the central server are handled over a backbone IP-based network.

The LoRaWAN end nodes(sensors) typically use Low Power and are battery powered (Class A and Class C). LoRa embedded sensors that run on batteries that lasts from 2–5 years typically. The LoRa sensors can transmit signals over distances from 1km—10km.

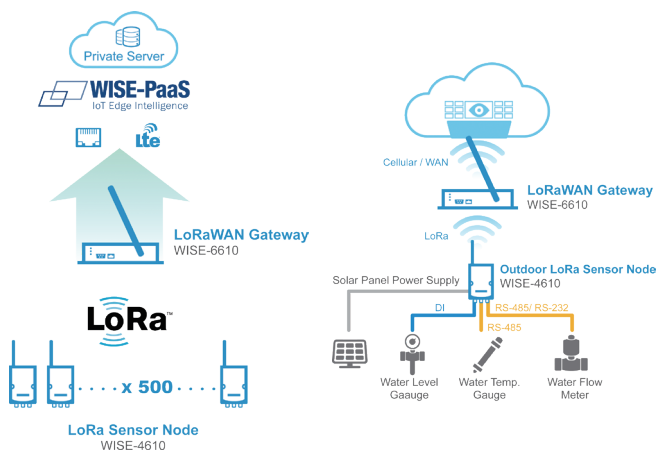

### Features

- Private LoRa and LoRaWAN selectable
- Longer communication range
- Better penetration through concrete and steel
- Less interference than 2.4GHz spectrum
- Application-ready I/O combination with IP65 enclosure
- Powered by solar rechargeable battery or 10–50V<sub>DC</sub> input
- GPS/Galileo/BeiDou/GLONASS support

### Common Specification

#### Wireless Communication

- **Standard** LoRaWAN or Private LoRa
- **Private LoRa Frequency Range & Region\***
  - EU 863-870 (MHz)
  - US 902-928 (MHz)
  - JP 915-928 (MHz)
- **LoRaWAN Frequency Range & Region\***
  - EU 868
  - NA 915
  - JP 923
  - AS 923

\* Other region can be supported upon request

- **Spreading Factor** 7~12
- **Outdoor Range** 15Km (L.o.S) by pairing with WISE-6610 (with 2 dBi Antenna)
- **Transmit Power** Up to +18dBm
- **Receiver Sensitivity** Up to -136dBm at SF = 12 / 125KHz
- **Data Rate**
  - 50 kbps at FSK mode EU868
  - 21.9 kbps at SF7 mode US915
  - 5.47 kbps at SF7 mode JP923
- **Topology** Star
- **Function** End Node
- **Antenna Type** External

#### GPS (Only Supported on WISE-4610P)

- **GNSS Systems** GPS, GLONASS, Galileo, BeiDou, QZSS and SBAS signals
- **Max. Update Rate**
  - Single GNSS: up to 18 Hz
  - Concurrent GNSS: up to 10 Hz
- **Accuracy**
  - Position: 2.5 m CEP (50% confidence)
  - With SBAS: 2.0 m CEP (50% confidence)
- **Acquisition**
  - Cold starts: 57 s
  - Aided starts: 7 s
- **Antenna Type** Internal

## General

- **Power Input** **WISE-4610P**  
Built-in 4100mAh Lithium rechargeable battery pack  
10~50V<sub>DC</sub> external power  
17-21V<sub>DC</sub> Solar Panel
- **Battery Life** **WISE-4610**  
10~50V<sub>DC</sub> external power  
6 months (1 hour data update and 1 day GPS update)
- **Configuration Interface** Micro-B USB
- **LED Indicator** Status, Error, Tx, Rx, Battery/Signal Level
- **Mounting** DIN 35 rail, wall, pole, and stack
- **Dimension (W x H x D)** 82 x 122 x 49 mm (without antenna)

## Operating Temperature

- **With rechargeable battery** 0 ~ 60 °C (32 ~ 140 °F)
- **Without battery** -25 ~ 70 °C (-13 ~ 158 °F)

## Storage Temperature

- **With rechargeable battery** -20 ~ 60 °C (-4 ~ 140 °F)
- **Without battery** -40 ~ 85 °C (-40 ~ 185 °F)
- **Operating Humidity** 5 ~ 95% RH (non-condensing)
- **Storage Humidity** 0 ~ 95% RH (non-condensing)

## WISE-S614 (4AI/4DI)

### Analog Input

- **Channels** 4
- **Resolution** 16-bit
- **Sampling Rate** 1Hz per channel
- **Accuracy** ±0.1% of FSR (Voltage)  
±0.2% of FSR (Current)
- **Input Range** ±150mV, ±500mV, ±1 V, ±5V, ±10V, 0 ~ 150mV,  
0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, 0 ~ 20mA,  
4 ~ 20mA, ±20mA
- **Input Impedance** > 2M Ω (Voltage)  
240 Ω (External resistor for current)
- **Isolation Voltage** 2000 V<sub>DC</sub>
- **Common Mode Voltage** 350 V<sub>DC</sub>
- **Drift** Unipolar ±100ppm  
Bipolar ±50ppm
- **Burn-out Detection** Yes (4~20mA only)
- **Supports Data Scaling and Averaging**

### Digital Input

- **Channels** 4
- **Input Type** Dry Contact (Wet Contact by request)
- **Logic Level** 0: Open  
1: Close to DI COM
- **Supports 200Hz Counter Input (32-bit + 1-bit overflow)**
- **Keep/Discard Counter Value when Power-off**
- **Supports Inverted DI Status**

## WISE-S615 (4 RTD)

### Analog Input

- **Channels** 4 differential
- **Input Connections** 2, 3-wire
- **Input Impedance** 10 MΩ
- **Resolution** 15 bits
- **Sampling Rate** 1 Sample/s (MAX)

### RTD Types and Temperature Ranges

- **Pt 100 RTD**  
RTD 100 (a = 0.00385) -200°C to 600°C
- **RTD 100 (a = 0.00392) -200°C to 600°C**
- **Pt 1000 RTD**  
Pt -40°C to 160°C

- **Accuracy** ±0.1% FSR
- **CMR @ 50/60 Hz** 90 dB
- **NMR @ 50/60 Hz** 60 dB
- **Span Drift** ± 25 ppm/°C

## WISE-S617 (2AI/2DI/1DO/1RS-485)

### Digital Input

- **Channel** 2
- **Logic Level (Dry Contact)** 0: Open  
1: Close to DI COM

- **Non-isolation**
- **Supports 32-bit counter input function (maximum signal frequency: 200 Hz)**
- **Supports keep/discard counter value when power OFF**
- **Supports frequency input function (maximum signal frequency: 200 Hz)**
- **Supports inverted digital input status**

### Analog Input

- **Channels** 2
- **Resolution** 16 bit
- **Sampling Rate** 1 Hz per channel
- **Accuracy** ±0.1% of FSR (Voltage)  
±0.2% of FSR (Current)
- **Input Range** ±1 V, ±5V, ±10V, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, 0 ~ 20mA,  
4 ~ 20mA, ±20mA
- **Input Impedance** > 2M Ω (Voltage)  
120 Ω (External Resistor for Current)
- **Isolation Voltage** 2000 V<sub>RMS</sub>
- **Common Mode Voltage** 350 V<sub>DC</sub>
- **Drift** Unipolar ±100ppm  
Bipolar ±50ppm
- **Burn-Out Detection** Yes (4 ~ 20mA only)
- **Supports data scaling and averaging**

### Digital Output

- **Channel** 1 (Sink Type)
- **Non-isolation**
- **Output Current** 100mA

### COM Port

- **Port Type** RS-485
- **Baud Rate (bps)** 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
- **Data Bits** 7, 8
- **Stop Bits** 1, 2
- **Parity** None, Odd, Even
- **Flow Control** Auto flow control
- **Signals** DATA+ and DATA-
- **Protection** 15 kV ESD
- **Supported Protocols** Modbus/RTU (Up to 32 addresses with a maximum of 8 instructions)

## WISE-S672 (6DI/1RS-485/1RS-485 or RS-232)

### COM Port

- Port Number: 2
- Type: COM1: RS-485  
COM1: RS-485/232
- Serial Signal: RS-485: DATA+, DATA-  
RS-232: Tx, Rx, GND
- Data Bits: 7, 8
- Stop Bits: 1, 2
- Parity: None, Odd, Even
- Baud Rate (bps): 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
- Protection: 15 kV ESD
- Protocol: Modbus/RTU (Total 32 address)

### Digital Input

- Channels: 6
- Input Type: Dry Contact
- Logic Level: 0: Open  
1: Close to DI COM
- Supports 200Hz Counter Input (32-bit + 1-bit overflow)
- Keep/Discard Counter Value when Power-off
- Supports Inverted DI Status

## Ordering Information

### WISE-4610 Advanced Industrial LoRaWAN Module

- WISE-4610-NA: Advanced Industrial LoRaWAN Module - NA915
- WISE-4610-EA: Advanced Industrial LoRaWAN Module - EU868
- WISE-4610-JA: Advanced Industrial LoRaWAN Module - AS923
- WISE4610JA2001-T: Advanced Industrial LoRaWAN Module - TW923
- WISE-4610P-NA: Advanced Industrial LoRaWAN I/O Module w/ GPS & battery - NA915
- WISE-4610P-EA: Advanced Industrial LoRaWAN I/O Module w/ GPS & battery - EU868
- WISE-4610P-JA: Advanced Industrial LoRaWAN I/O Module w/ GPS & battery - AS923
- WISE4610PJA2001-T: Advanced Industrial LoRaWAN I/O Module w/ GPS & battery - TW923

### WISE-S600 IP65 I/O Module with M12 Connectors

- WISE-S614-A: 4AI/4DI
- WISE-S615-A: 4RTD
- WISE-S617-A: 2AI/2DI/1DO/1RS-485 w/ 2ch 12V<sub>DC</sub> power output
- WISE-S672-A: 6DI/1RS-485/1RS-485 or RS-232


### WISE-S600T I/O Module with Terminal Block

- WISE-S614T-A: 4AI/4DI
- WISE-S617T-A: 2AI/2DI/1DO/1RS-485 w/ 2ch 12V<sub>DC</sub> power output

### Accessories

- 1654011516-01: M12, A-code, 8 Pin, Male
- 1655005903-01: M12, A-code, 4 Pin, Female
- 1700028162-01: M12, A-code, 4 pin, Female with 1M cable
- 1700028163-01: M12, A-code, 8 Pin, Male with 1M cable
- PWR-242-AE: DIN Rail Power Supply (2.1A Output Current)
- PWR-243-AE: Panel Mount Power Supply (3A Output Current)
- PWR-244-AE: Panel Mount Power Supply (4.2A Output Current)


## Pin Assignment



Model Name	M12 Cable	WISE-S614	WISE-S615	WISE-S617	WISE-S672	
Pin Number						
P/N	4Pin : 1700028162-01 8Pin : 1700028163-01	WISE-S614-A	WISE-S615-A	WISE-S617-A	WISE-S672-A	
A	1	White	DI0	RTD2+	AI0+	DI0
	2	Brown	DI1	RTD2-	AI0-	DI1
	3	Green	DI2	RTD2 COM	+12V Out0	DI2
	4	Yellow	DI3	NC	+12V Out GND	DI3
	5	Gray	NC	RTD3+	AI1+	DI4
	6	Pink	NC	RTD3-	AI1-	DI5
	7	Blue	NC	RTD3 COM	+12V Out1	NC
	8	Red	DI COM	NC	+12V Out GND	DI COM
B	1	White	AI0+	RTD0+	DI0	RS-485 D1-
	2	Brown	AI0-	RTD0-	DI1	RS-485 D1+
	3	Green	AI1+	RTD0 COM	DI COM	RS-232 TX
	4	Yellow	AI1-	NC	DO0	RS-232 RX
	5	Gray	AI2+	RTD1+	DO GND	RS-485 D2-
	6	Pink	AI2-	RTD1-	RS-485 D+	RS-485 D2+
	7	Blue	AI3+	RTD1 COM	RS-485 D-	NC
	8	Red	AI3-	NC	RS-485 GND	RS-232 GND
PWR	1	Brown	+VS	+VS	+VS	+VS
	2	White	-VS	-VS	-VS	-VS/ SP-
	3	Blue	SP+	SP+	SP+	SP+
	4	Black	SP-	SP-	SP-	NC

## Dimensions

Unit: mm

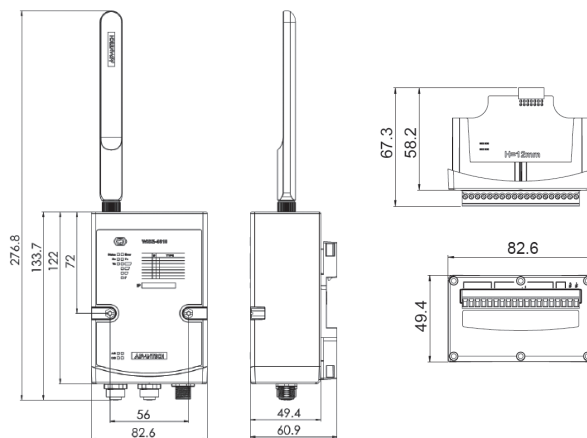

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [GPS Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[ISM3333-C6.1](#) [SIM68M](#) [GPS-11858](#) [SL871GPS232R001](#) [DD-14239](#) [M20050-1](#) [M20048-1](#) [NEO-M8M-0](#) [S2-105Y0-Z1E0G](#) [NEO-M8P-0](#)  
[SIM28ML](#) [EWM-G110H01E](#) [WISE-4610P-NA](#) [M10578-A2](#) [M10578-A3](#) [GPS-13740](#) [MIKROE-4150](#) [28504](#) [L26ADR-S89](#) [L26-M33](#)  
[L26T-S89](#) [L70B-M39](#) [L86-M33](#) [L89-S90](#) [L96-M33](#) [S2-10640-Z1G0D](#) [EL.1A](#) [4037735105317](#) [4037735105331](#) [W2SG0084i-B-T](#)  
[2614021137000](#) [EWM-G108H01E](#) [TEL0132](#) [PKG300060P](#) [RXM-GPS-F4-T](#) [RXM-GPS-FM-B](#) [A1084-A](#) [A2100-A](#) [GYSFFMAXC](#)  
[W2SG0008i-B-T](#)