




ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	8.0	± .3
T:	2.8	± .36
Lead Diameter	0.5	± .1
S:	5.5	± .5
L:	38.0	± 9
Coating Lead Run Down (straight Leads)		±
B:	7.50	± 3.5
C:	2.50	± .5

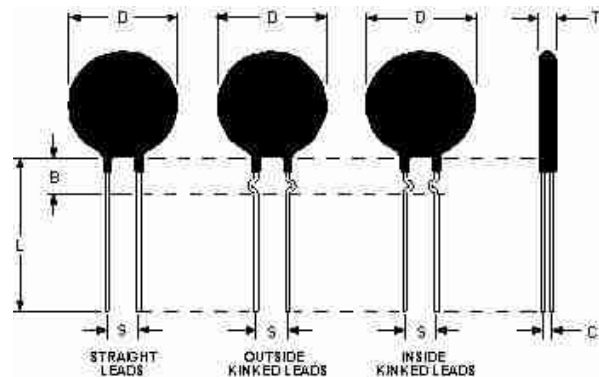

Electrical Specifications

Resistance:	7.0	Ω	± 20 %
Max Steady State Current upto 65°C:	2.00		A
Max Rec. Energy Rating:	8		J
Actual Failure Instantaneous Energy:	17		J
Maximum Capacitance @ 120 VAC:	560		μ f
Resistance @ 100% Max Current:	0.22		Ω
Resistance @ 50% Max Current:	0.58		Ω
Body Temperature at 100% Max Current:	144.00		°c
Dissipation Constant:	90.0		mw/°c
Thermal Time Constant:	27		Sec.
Material Type (for Beta and Curve):	B		

SL08 7R002	
Date: 09/05/2012	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Inrush Current Limiters](#) category:

Click to view products by [Ametherm](#) manufacturer:

Other Similar products are found below :

[B57364S2509A002](#) [SL1580003](#) [MS15 15004](#) [MT8950AC](#) [B57364S121M](#) [SL22 20005-B](#) [B57237S0330M00](#) [AS35 1R040](#)
[B57153S0809M000](#) [CL-120AB](#) [CL-130A](#) [CL-80AB](#) [CL-140AB](#) [B57235S0809M000](#) [TG2512A](#) [AS32 0R530-100](#) [AS32 0R536-100](#) [AS32](#)
[10015](#) [AS32 5R020](#) [AS35 10018](#) [MS15 30004](#) [MS22 12103](#) [MS22 20005](#) [MS22 22103](#) [MS22 75004](#) [MS32 0R536](#) [MS32 0R540](#) [MS32](#)
[10015](#) [MS32 15012](#) [MS32 1R036](#) [MS32 20010](#) [MS32 20010-B](#) [MS32 2R025](#) [MS32 50006](#) [MS32 5R020](#) [MS32 5R020-B](#) [MS32 7R015](#)
[MS35 3R725](#) [SG100](#) [SG110](#) [SG140](#) [SG16](#) [SG200](#) [SG220](#) [SG240](#) [SG250](#) [SG301](#) [SG302](#) [SG303](#) [SG311](#)