


PC card drilling dimensions (after plating)
(thickness 1.60±0.20mm)

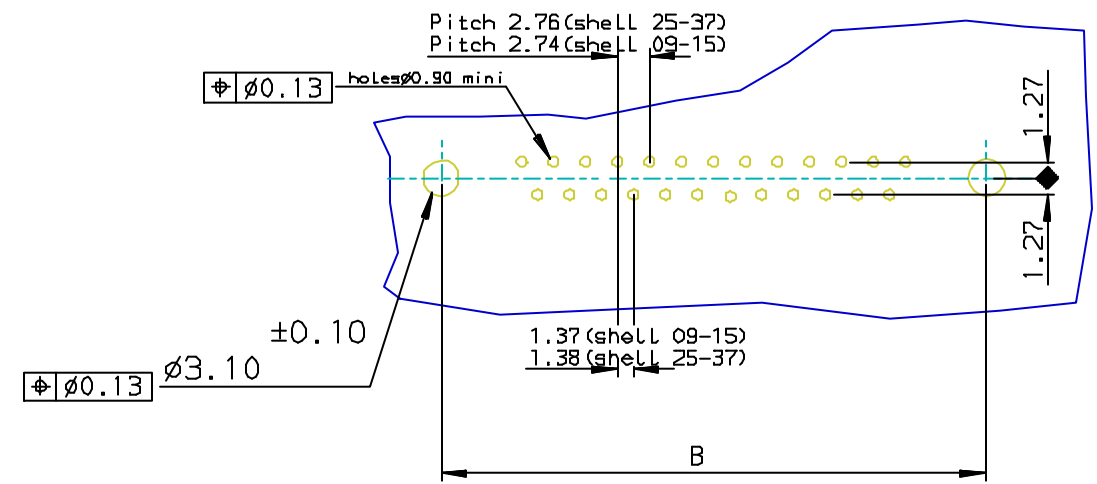

Part Number & Date Code Printing

LF FOR LEAD FREE

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	D09S13F6GL00**	D09S13F6GX00**
15	39.14	33.32	25.18	24.54	D15S13F6GL00**	D15S13F6GX00**
25	53.03	47.04	39.12	38.25	D25S13F6GL00**	D25S13F6GX00**
37	69.32	63.50	55.68	54.71	D37S13F6GL00**	D37S13F6GX00**

Threaded M3

Threaded UNC 4.40

Part number SEE TABLE

REQUIREMENTS

Technical characteristics.

Shell: steel tin/Zinc Cr3 plated
 Insulators: self-extinguishing thermoplastic, UL class 94V0
 Contacts size 20: brass, gold 0.76µ on mating end, bright tin on termination end over nickel on entire contact
 Cycles < 500 .

Harpoons: brass, tin plated

Metal plate for electrical continuity: brass, tin /Zinc Cr3 plated

Nuts: brass, tin/Zinc Cr3 plated

Electrical characteristics.

max. current rating: 5A
 Test voltage: 1000V
 Rated voltage: 300V
 Contact resistance: <15mΩ
 Shell resistance: <5mΩ
 Insulation resistance: >5000MΩ

Climatic characteristics.

Operating temperature range: -55°C +125°C

Dimensions:

In accordance with MIL-C-24308

FOR ROHS DETAILS REFER DWG.NO: C01-8646-0000

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	JOHN SLEEBA	1994/07/04	ANGULAR	0.X ±0.1
Eng	GEORGE VJ	1994/07/04	LINEAR	0.XX ±0.1
Chr	GEORGE VJ	2005/07/27	0.XX* ±1*	0.XXX ±0.1
Appr	KVSD	2005/07/27	Product family	D-SUB
title				SOCKET CONNECT.DELTA D right angle
with nut, harpoon, metal plate				Rev. E
catalog no				DELTA-D
dwg no		C01-8646-0265		sheet 1 of 1
CUSTOMER		sheet 1 of 1		

rev	ecn no	dr	date
D	105-0124	JS	2005/07/27
E	106-0074	SK	2006/06/08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-



Copyright FCI.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[56F706-005-LI](#) [56F711-015](#) [LV242999-142T12](#) [015-0341-000](#) [015-0372-005](#) [015-0372-008](#) [015-8755-001](#) [020419-0104](#) [012-0467-000](#)
[012-9507-034](#) [012-9507-114](#) [020745-0008](#) [609-25P](#) [CT2-18-11PCAU](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#) [CT6-14S-2SC](#) [CT6E14SA7SC](#)
[CT6N10SL-4SSA34](#) [M83513/01-FC](#) [M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [6STD09PCM99B70X](#) [6STD09SCM99B30X](#)
[6STD09SCT99S40X](#) [6STD15PCT99S40X](#) [6STD15SCT99S40X](#) [6STF09PCM05B70X](#) [7-135760-9](#) [MC11E-10-6SN](#) [747552-3](#) [MD1-21PS](#)
[MDM-15SCBRM7-F222](#) [MDM96517-699](#) [MDM96521-744](#) [MDVB1-21SL1](#) [MIK0-1-7SH003](#) [MIKQ6-7SH076](#) [MIKQ7-7PH077](#) [MIKQ7-](#)
[7PH11](#) [MIKQ7-7PH32](#) [MJSV-28SL61](#) [MKJ4A1F14-55S](#) [8-135760-3](#) [8STD09PCM99B30X](#) [PG-KV/PV-16-GROM-SEALING](#) [GDA15P](#)
[GDAY15PB](#) [980-0000-170](#) [980-0000-171](#)