

# 1.00mm Pitch FFC/FPC – F52Q/F52R Series

## RIGHT ANGLE ZIF FLEX CONNECTORS

F52Q/F52R series are 1.00mm pitch right angle ZIF flex connectors with slider mechanism, top contact and surface mount termination. These connectors feature a height of 2.00mm and come in 4 to 34 contacts. This series features a cable thickness of 0.30mm and provide enhanced durability of 30 mating cycles. The connectors come with a robust design and prevent solder and flux wicking. These are ideal for automotive, data, industrial, communication, consumer and medical applications.

- Easy to operate and strong FFC/FPC retention makes it vibration-proof
- Ensures high solderability and high durability



### TARGET MARKETS



### FEATURES

- ZIF (Zero Insertion Force) mechanism
- Slider mechanism
- Design against solder and flux wicking
- High temperature thermoplastic housing
- 4 to 34 contacts available
- Lead and halogen-free

### BENEFITS

- Absence of frictional mating wear resulting in high mating cycle life
- Easy to operate and strong FFC/FPC retention makes it vibration-proof
- Ensures high solderability
- Wide operating temperature range of  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$
- Comprehensive range to satisfy different customer requirements
- Meets environmental, health and safety requirements

## ▶ 1.00mm Pitch FFC/FPC – F52Q/F52R Series

### TECHNICAL INFORMATION

#### MATERIAL

- Housing: LCP, natural color (UL94V-0)
- Slider: PA9T, black color (UL94V-0)
- Contact: Phosphor bronze, T=0.20mm
- Anchor-plate: Brass, T=0.20mm

#### MECHANICAL PERFORMANCE

- FFC/FPC Retention Force: 30gf/pin
- Terminal Retention Force: 100gf/terminal min.
- Anchor-plate Retention Force: 100gf/plate min.
- Durability: 30 mating cycles

#### ELECTRICAL PERFORMANCE

- Voltage Rating: 50V AC/DC
- Current Rating: 0.5A
- Contact Resistance: 30MΩ max.
- Insulation Resistance: 500MΩ min.
- Dielectric Withstanding Voltage: No short or breakdown after 500V AC, 2mA, 1min.

#### PACKAGING

- Tape & Reel

#### APPROVALS AND CERTIFICATIONS

- UL file number E106764
- RoHS compliant

#### SPECIFICATION

- Aorora Product Specification: IS.EQC.001

#### ENVIRONMENTAL

- Operating Temperature Range: -40°C to +105°C

#### TARGET MARKETS/APPLICATIONS



Car Multimedia  
Car Navigation  
Dashboard  
PND



Base Station  
Power  
Switches



Notebook  
Tablets  
Wearables  
Gaming  
DSC  
LCD & PDP TV



Router  
Server  
ODD  
HDD




Sensing element  
Monitoring camera  
Human Machine Interface  
Industrial PC  
Robotics



Ultrasonic  
Patient Monitor  
MRI  
CT  
Infusion Pump

### PART NUMBER SELECTOR

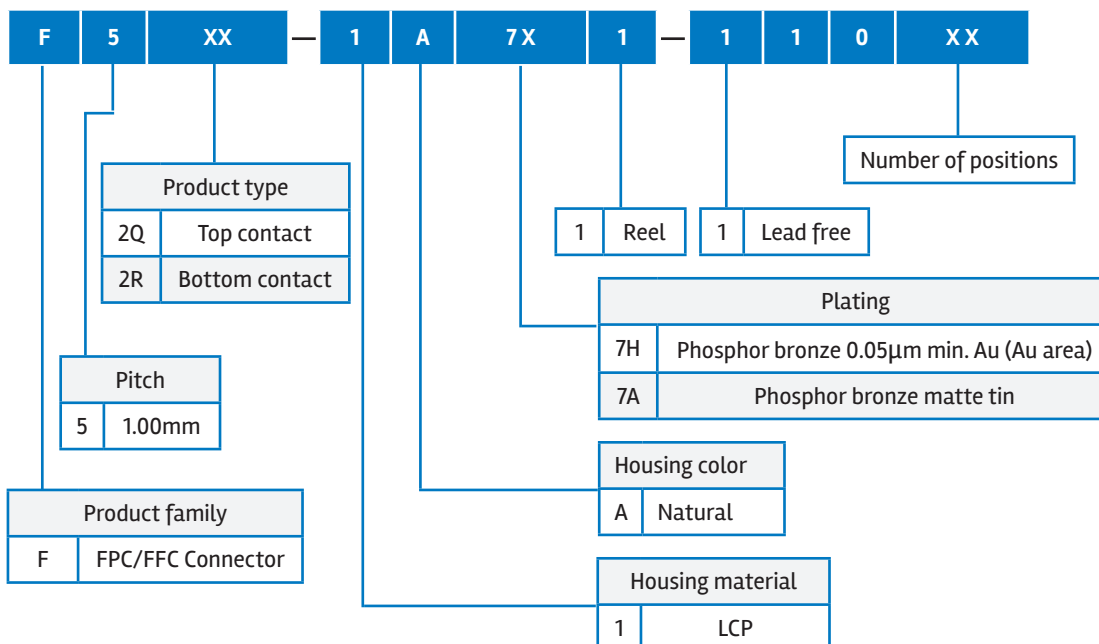

AORORA F52Q52R079EA4

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-](#)  
[4226B](#) [70-4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[821-22-002-10-001101](#)