
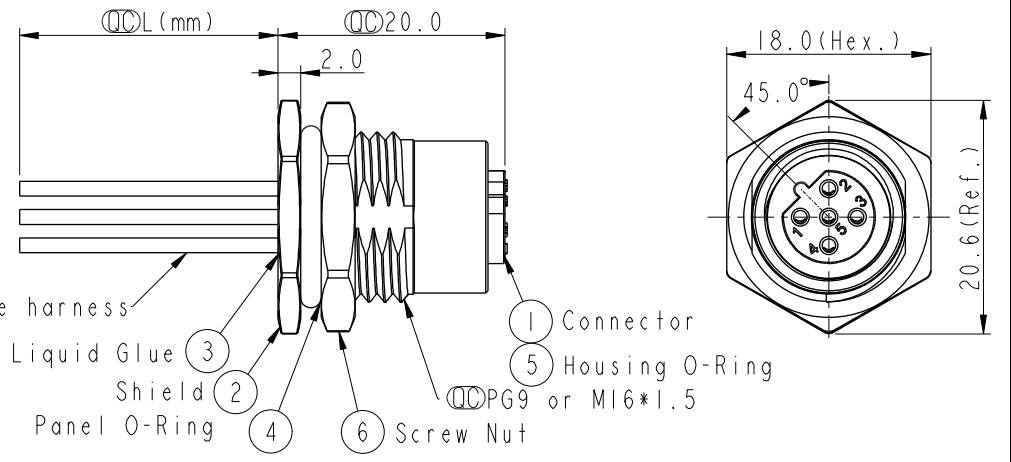
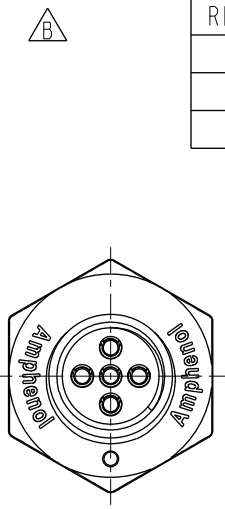


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31580004-005	2015-07-27	Yulong_wang	Change to Share Drawing.
C	E191630	2019-09-19	Ruru	Update Wire Tolerance

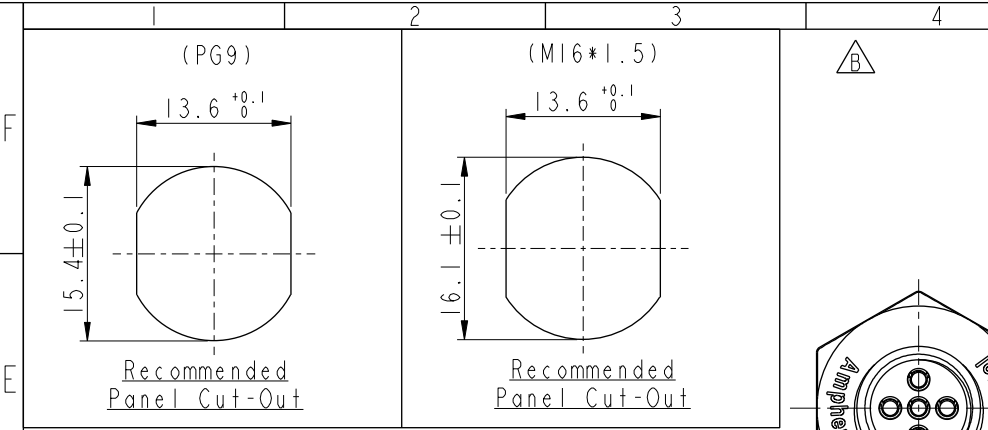

M 12B - 05 P F F C - S F 8 X XX

12B: B-Code
 05: 5Pin
 P: Panel (板端)
 F: Female Connector (母座)
 F: Female Pin (每Pin)
 C: Crimp Type (打端式)
 S: Screw (螺紋式)

15: 150mm
 20: 200mm
 95: 950mm
 Cable Pitch Unit=50mm


A0: 1000mm
 A5: 1500mm
 Cable Pitch Unit=100mm
 Wire Length (L): 150~1500 mm

B: PG9
 C: M16*1.5

8: IP68 (防水等級68)

F: Front Fasten (前鎖式/Enclosure Rear Mount)


Pin #	Wire	顏色
5	Gray	灰
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

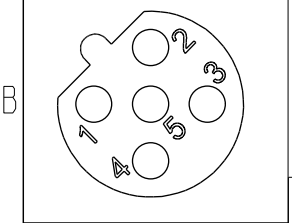

Contacts	Wire harness	AWG	Item No.
5P	UL1061	22	M12B-05PFFC-SF8BXX
			M12B-05PFFC-SF8CXX

Note:

- * Important Dimension.
- * Waterproof Rate: IP68.
- * Housing: Nylon+GF, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Shield: Zinc Alloy, Nickel Plated.
- * Screw Nut: Zinc Alloy, Nickel Plated.
- * Panel O-Ring: Viton, Black.
- * Housing O-Ring: Viton, Green.
- * Wire harness: UL1061
- * Rated Voltage: 60V dc. or ac.
- * Rated Current: 4A
- * Operating Temperature: -25~85°C
- * For Panel Thickness Max 4.5mm.
- * Recommended Nut Torque: 4-6 Kgf.cm.
- * Wire harness Tolerance: 150~300±15mm
 301~1000±20mm
 Over1000 ±50/-0mm



TITLE	SCALE	SIZE	SHEET	OF
M12 B-Code Female Conn. Panel Front With Wire harness	2:1	A4	1	1
UNIT:mm	REV. C	WC-REV. A.5	Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	M12B-05PFFC-SF8XXX	ALTW	Ruru	Rita	Max	2019-09-19

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[60963](#) [60964](#) [M83513/19-F01CP](#) [703000D02F2002](#) [703001D02F0602](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#) [802027107404-1](#)
[802027213811-1](#) [804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [8R4J30E03C3003](#) [1200651332](#)
[1200651713](#) [1200660844](#) [1200660845](#) [1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#)
[1200860125](#) [1200870123](#) [1200980102](#) [1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#)
[1200661342](#) [1200661343](#) [1200670080](#) [1200670220](#) [1200680331](#) [1200720252](#) [1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#)
[1200980008](#) [1200980031](#) [1210502211](#)