

PDS-258



OVERVIEW

08

16

Amphenol's R-VPX is a ruggedized, high-speed, board-to-board interconnect system capable of data rates in excess of 10 Gbps, meeting and exceeding VITA 46 standards. This connector system gives users modularity and flexibility by utilizing PCB wafer construction with customized wafer-loading patterns.

DAUGHTER CARD CONFIGURATION: HOW TO ORDER

1.	2.	3.	4.	5.	6.
Connector Type	Gender	Size	Insert Type	Plating	Contact Finish
RVPX-	Р	16	D	M	1

1. Connector Type

RVPX-	Rugged High Speed Board		D	Differential	
2. Gende	er		S	Single-Ended	
P Module			Р	Power	1
		J	V	Standard VITA 46 P0]

4. Insert Type

5. Plating


3. Size 8 Position Insert

16 Position Insert

	М	50 Micro-Inches Gold
	С	30 Micro-Inches Gold

6. Contact Terminiation Finish

0. O	ontact formination i mish
1	Tin 💮
2	Tin-Lead

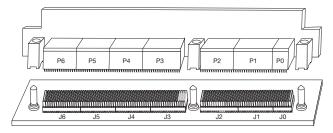

Daughter Card				
Module Position		Part No. Amphenol R-VPX Connectors		
P0		RVPX-P08VCX	RVPX-P08VMX*	
P1, P2, P3, P4,	Differential	RVPX-P16DCX	RVPX-P16DMX*	
P5, P6	Single-Ended	RVPX-P16SCX	RVPX-P16SMX*	
†Keying Guide Modules		RVPX-HMDX	RVPX-HMM-X	

^{*}Refer to Step 6 (Contact Termination Finish) to complete part number †Contact AAO for Available Rotations

APPLICATIONS

- + Commercial and Military Aerospace
- + Electronic Systems/C4ISR
- **Ground Defense**
- + Missile Defense
- + Space

FEATURES & BENEFITS

- + Qualified to VITA 46 for Open VPX applications
- + Fully intermountable & intermateable to existing VITA 46 connectors
- + Meets and exceeds VITA 47 performance requirements
- + Supports Ethernet, Fiber Channel, InfiniBand, and other protocols
- + Modular COTS lightweight connector system
- + Low mating force connector system
- + Pin-Less backplane connector family
- + Supports .8 inch card slot pitches
- + Up to 140 signals per inch
- + Contact current rating 1.5 Amps
- + Can be combined with high power modules, RF Modules (VITA 67) and Optical modules (VITA 66)

MATERIALS

- + Contacts: High performance copper alloy, available plated with 50 μin Au over 50 μin Ni in mating area (M) or 30 µin Au (C)
- + Housings: High Temperature thermoplastic
- + Operating Temp: -55 to +105C
- + Guide Hardware: Aluminum or passivated stainless steel



PDS-258

BACKPLANE CONFIGURATION: HOW TO ORDER

1.	2.	3.	4.	5.	6.
Connector Type	Gender	Size	Insert Type	Plating	Contact Finish
RVPX-	J	16	E	М	1

1. Connector Type		
DVDV	Rugged High Speed Board	

4	Insert	Τv	ne
-	HISCH	ıу	րԵ

M	Middle
E	End

Gender

	5
J	Backplane

3. Size


08	8 Position Insert
16	16 Position Insert

5. Plating

M	50 Micro-Inches
С	30 Micro-Inches

6. Contact Termination Finish

1	Tin 💮	
2	Tin-Lead	

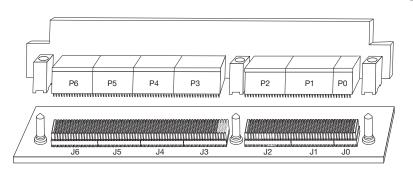

Backplane			
Module Position	Part No. Amphenol R-VPX Connectors		
J0	RVPX-J08ECX	RVPX-J08EMX*	
J1, J3 J4, J5,	RVPX-J16MCX	RVPX-J16MMX*	
J2, J6	RVPX-J16ECX	RVPX-J16EMX*	
†Keying Guide Modules	RVPX-HPD-X	RVPX-HPM-X	

^{*} Refer to Step 6 (Contact Termination Finish) to complete part number †Contact AAO for Available Rotations

CONTACT US:

Catalin Brandas

E-mail: cbrandas@amphenol-aao.com

Phone: 607-563-5129

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors. REV: 5/5/2015

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for High Speed/Modular Connectors category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

650827-1 74040-1346 1410191-1 1410337-1 1410368-3 1410964-2 1410326-3 1410367-3 1410971-4 1467833-1 2000877-1 2000878-1 2041314-1 2065387-1 2187307-1 163P 1934290-1 2000875-1 2065917-1 2102736-2 FSR-40 2169868-2 22354-8 437-5040-000 5- 1393565-0 039-0246-000 0740618502 0761601016 0784461022 10123159-12ELF 030-2415-003/100 PK 030-7380-004 030-2494-001 532939-1 5532901-3 3-1469268-7 74748-102LF 73670-0247 10041743-101LF 10066670-100002LF 1-533915-1 249-4515-000 7-1469373-3 DL2-2J/S 2000713-8 2000713-7 3011-21 757105208 EBTF-4-10-2.0-S-RA-1 430305-001