

Features

- This series is designed for average power 320W approximated ESD protection, different V_{RWM} , different peak pulse power available.
- Protects one I/O or power line.
- Low clamping voltage.
- Working voltages: 3.3V, 5.0V, 12V, 15V, 18V, 24V, 36V.
- Low leakage current.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228
- Compliant to Halogen-free.

IEC compatibility

- IEC61000-4-2 (ESD) $\pm 15kV$ (air), $\pm 8kV$ (contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)
- IEC61000-4-5 (Lightning) 12A (8/20us)


Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation

Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-323
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Mounting Position : Any
- Weight : Approximated 0.005 gram

Package outline

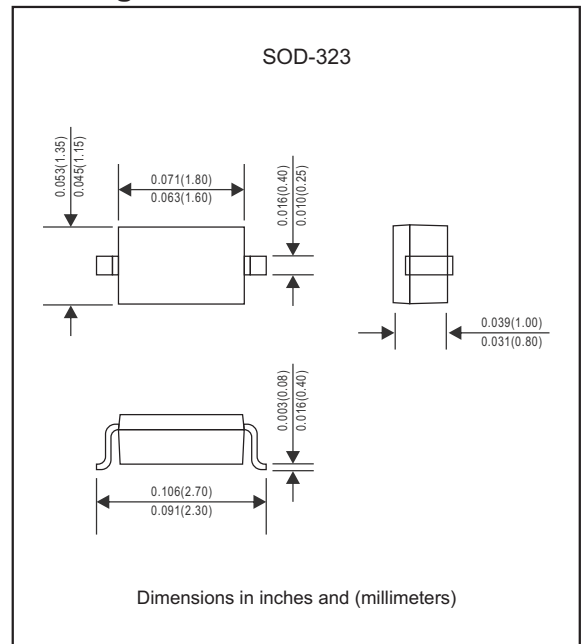

Maximum ratings (at $T_A=25^\circ C$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	VALUE	UNIT
Total power dissipation	Peak pulse power (tp = 8/20us)	P_{PP}	320	W
Operating junction temperature range		T_J	-55 to +150	$^\circ C$
Storage temperature range		T_{STG}	-55 to +150	$^\circ C$


Electrical characteristics (at $T_A=25^\circ C$ unless otherwise noted)

Part No.	V_{RWM} (V) (Max.)	$I_R(\mu A)$ @ V_{RWM} (Max.)	$V_{BR}(V)$ @ I_T (Note 2) (Min.)	I_T (mA)	$V_C(V)$ @ $I_{PP}=1.0A$ (Max.)	I_{PP} (A) (Max.)	$V_C(V)$ @ I_{PP} (Max.)	C_J (pF) (Max.)
ESD3Z3.3C	3.3	200	4.0	1.0	7.0	25.0	16.0	350
ESD3Z5.0C	5.0	10	6.0	1.0	9.8	24.0	17.0	260
ESD3Z12C	12	1	13.3	1.0	19.0	13.0	25.0	110
ESD3Z15C	15	1	16.7	1.0	24.0	9.0	32.0	100
ESD3Z18C	18	1	19.0	1.0	28.0	8.0	35.0	90
ESD3Z24C	24	1	26.7	1.0	43.0	6.0	52.0	75
ESD3Z36C	36	1	40.0	1.0	60.0	4.0	75.0	35

Note 1. Surge current waveform per Fig.1

2. V_{BR} is measured with a pulse test current I_T at an ambient temperature of $25^\circ C$.

Typical characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

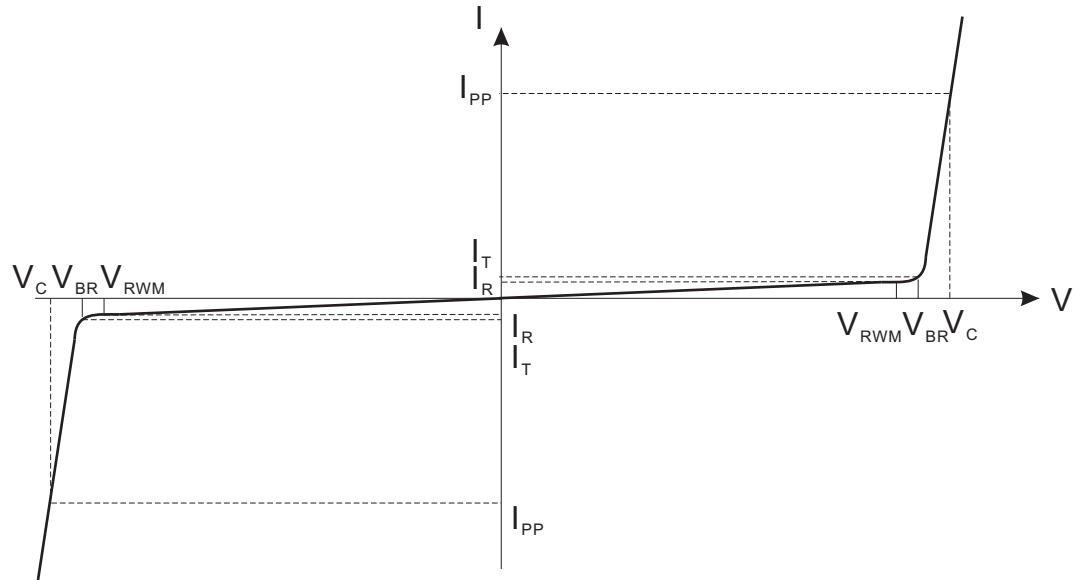

Bi-Directional TVS

- V_C : Clamping voltage @ I_{PP}
- I_{PP} : Maximum reverse peak pulse current
- V_{RWM} : Maximum working peak reverse voltage
- I_R : Maximum reverse leakage current @ V_{RWM}
- V_{BR} : Breakdown voltage @ I_T
- I_T : Test current
- C_J : Max. capacitance @ $V_R = 0\text{V}$ and $f = 1\text{MHz}$

Rating and characteristic curves (ESD3ZxxC SERIES)

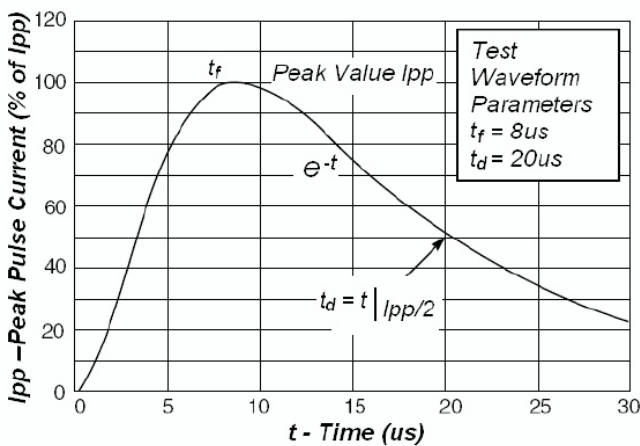


Fig1. Pulse Waveform



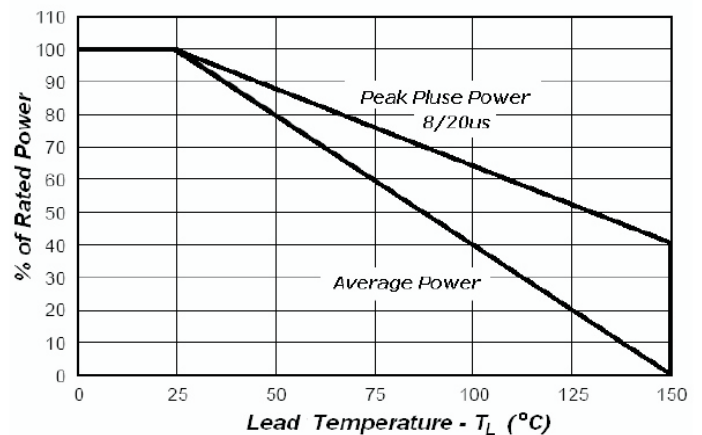


Fig2. Power Derating

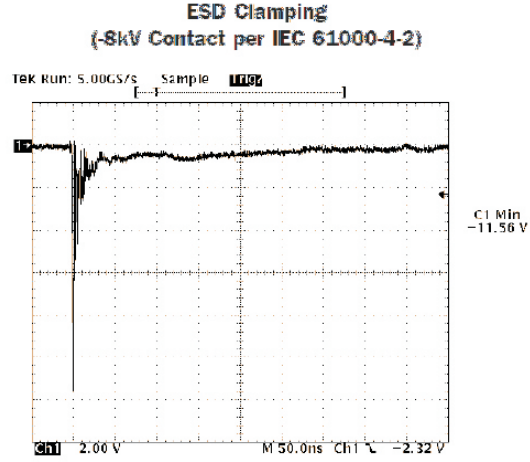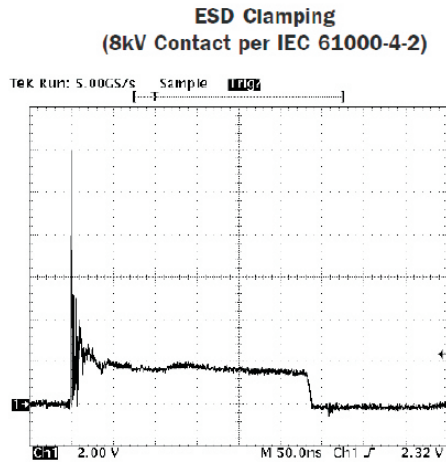


Pinning information

Pin	Simplified outline	Symbol
Bi-Directional		

Marking

Type number	Marking code
ESD3Z3.3C	03B/2A
ESD3Z5.0C	05B/3M
ESD3Z12C	12B/12C
ESD3Z15C	15B/2J
ESD3Z18C	2K
ESD3Z24C	24B/M
ESD3Z36C	2N

Suggested solder pad layout

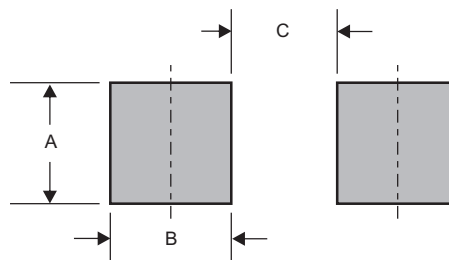

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-323	0.033 (0.83)	0.025 (0.63)	0.063 (1.60)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [AnBon](#) manufacturer:

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-](#)
[TP](#) [MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)