

battery type:
battery size:
chemical system:

Alkaline Manganese Dioxide (mercury free)
 4LR44; 476A; PX28; 4G13; L1325
 Zn / KOH-H₂O / MnO₂

nominal voltage: 6 V
open circuit voltage: 6.2...6.5 V
 6.1...6.5 V

Conditions

new battery
 after 1 year storage at 20°C

capacity

rated: 155 mAh discharge under 27kΩ load; 24hours/day
 End Voltage (EV): 3.6V
 minimum: 145 mAh discharge under 27kΩ load; 24hours/day
 End Voltage (EV): 3.6V

all measurements at 22 ± 2°C ambient



Standard discharge time

nominal: ≥ 780 h at 27kΩ load new battery
 EV: 3.6V
 MAD: (minimum average duration) ≥ 1600 pulse at 100Ω pulse load 2s/3s; 24h/d
 EV: 3.6V
 75 h at 3kΩ load for IQC measurement
 EV: 3.6V (tested within 30 days after delivery)

Discharge currents

standard: 0.2 mA
 max. recommended current under continuous discharge: 2 mA
 max. recommended current under pulse discharge: 15 mA

Discharge diagrams:

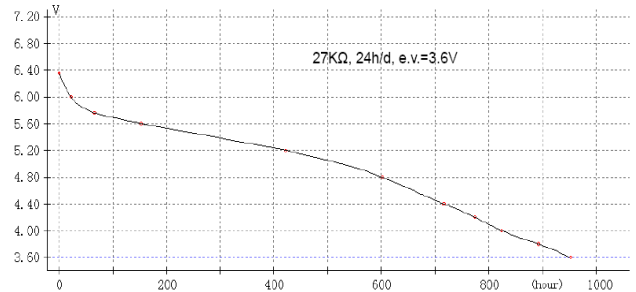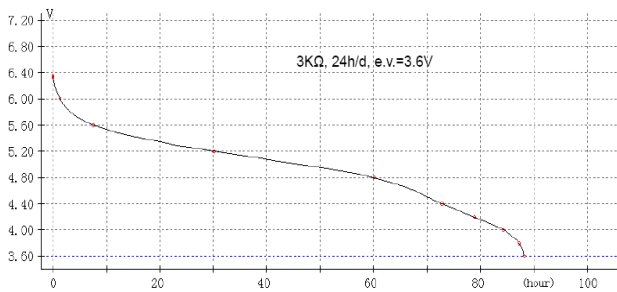


shelf life: 3 years under proper storage conditions (ta: ≤ 22°C; RH: 60 ± 15%)
 ≥90 % remaining capacity after 12 months storage


operating temperature: - 20...60 °C

storage temperature: 5...25 °C (recommended)

mechanical specifications:
 Dimensions(mm):



nominal weight: 10.2 g



blister card
 dimensions: 56 x 71.5mm
 weight: 12g (incl. battery)



ANSMANN Specifications for model:

4LR44 (PX28) Alkaline Battery
"Hg free" blister package

data sheet no. / part no.	1510-0009
supplier no.	703385
author / date	TG / 14.06.2018

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ansmann](#) manufacturer:

Other Similar products are found below :

[1900-0019](#) [1600-0153](#) [1600-0269](#) [1600-0223](#) [1001-0095](#) [5030902](#) [1600-0137](#) [ENERGY 16 PLUS](#) [1600-0265](#) [1001-0079-UK](#) [1001-0014](#)
[5024083-UK](#) [2000-0001-08](#) [1600-0282](#) [1700-0109](#) [1000-0022](#) [2447-3032-20](#) [2000-0001-07](#) [2000-0001-13](#) [1001-0063-UK](#) [1600-0162](#) [1600-](#)
[0271](#) [1600-0285](#) [1700-0080](#) [1510-0008](#) [2000-0001-11](#) [2000-0001-12](#) [1600-0274-UK](#) [1600-0276-UK](#) [5035342](#) [5013253](#) [1600-0211](#) [1600-](#)
[0173](#) [1600-0275-UK](#) [1001-0096](#) [1600-0145](#) [2447-3032](#) [1700-0068](#) [2447-3035-20](#) [1001-0014-UK](#) [5000023](#) [1600-0154](#) [1001-0004](#) [5020012](#)
[1250-0014](#) [5035042](#) [1600-0224](#) [10950964/01](#) [5035052](#) [5035362](#)