



TEMPERATURE RANGE -40/+125




ROHS COMPLIANT



HALOGEN FREE



MERCURY FREE

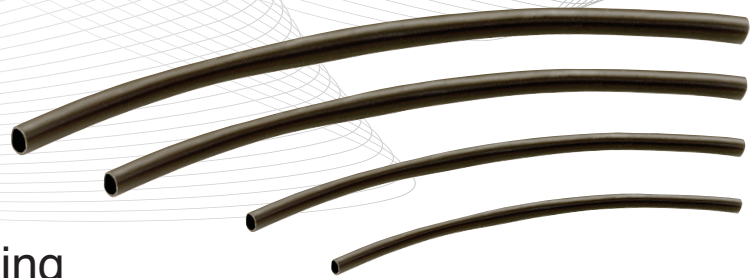

# FFAT Series

## Flexible Ferrite Absorbent Tubing Commercial Applications

### Features and Benefits

- Provides effective EMI Suppression in a wide Frequency Range (10MHz to 3GHz).
- High electrical resistance (106 to 108).
- Easy and fast to process.
- Extremely flexible and can freely be arranged in space.
- Can be incorporated into the over-molding process on cable assemblies.
- Eliminates the task of soldering braid.
- Effectively eliminates EMI and RFI problems on internal and external power, data and signal lines.
- Five sizes available.


### Parameters

**Operating Temperature Range** -55°C to +125°C

**Manufactured Length** 39.37 inches ± 0.50, 1 meter ± 12.7 mm

### Testing

Impedance Testing using HP4191A.

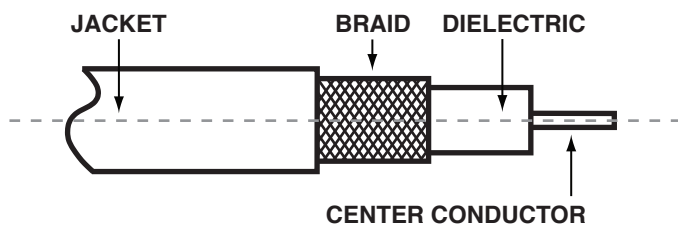


### Dimensions

	Outside Diameter		Inside Diameter	
	Inches	Millimeters	Inches	Millimeters
FFAT-32	0.116	2.9	0.072	1.8
FFAT-54	0.196	5	0.157	4
FFAT-96	0.354	9	0.236	6
FFAT-117	0.43	11	0.275	7
FFAT-1410	0.55	14	0.393	10

### Cable Reference Table

Cable	O.D. Jack
RG-8A/U	0.405
RG-9B/U	0.42
RG-55	0.176
RG-58	0.15
RG-58A	0.195
RG-59	0.191
RG-62	0.191
RG-62A	0.242
RG-71	0.208
RG-140	0.176
RG-141	0.146
RG-141A	0.19
RG-142	0.171
RG-174	0.08
RG-178	0.054
RG-179	0.084
RG-179B/U	0.1
RG-180	0.124
RG-187	0.084
RG-187A/U	0.11
RG-188	0.081
RG-188A/U	0.11
RG-195	0.124
RG-196	0.054
RG-210/U	0.242
RG-213/U	0.405
RG-214/U	0.425
RG-223	0.176
RG-303	0.146
RG-316	0.081
RG-316 DS	0.102

### Impedance vs. Frequency (See Above Table For Specific Values)

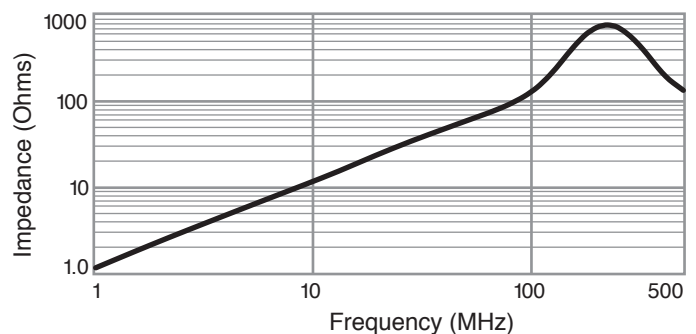

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [EMI Gaskets, Sheets, Absorbers & Shielding](#) category:*

*Click to view products by [API Delevan](#) manufacturer:*

Other Similar products are found below :

[8101010140](#) [8563-0090-89](#) [1194-7.7X10](#) [1245-34"X18YD](#) [1267](#) [1345-3/8x18yrd](#) [1380-2"X8"](#) [1554907-1](#) [2320002000](#) [2320014700](#)  
[SG293037DS](#) [ST005PCN50](#) [55005107](#) [38M4040AA0606](#) [46J5N02020.NN00](#) [1125-8X10](#) [1126X1"](#) [1170-3/4X18YDS](#) [1170-7.7x10](#) [1183-](#)  
[12"X18YD](#) [6-34T-BD-0.315](#) [SG125187D-24](#) [SG125250R-24](#) [SG187375R-24](#) [SG284050DS](#) [8402010540](#) [KIT TECH CLIP](#) [1194](#) [10-40450-](#)  
[28S](#) [1245](#) [1267-1/2"x18yd](#) [46J8501020.NN00](#) [1170-1/4"x18yd](#) [AL-36FR-1x54.5](#) [3013310A](#) [1194X1"](#) [3020604](#) [3021302](#) [3031313](#) [260709](#)  
[3021310](#) [6-34UT-070-BD-16](#) [303076048](#) [46J5N03020.NN00](#) [30206025](#) [30395641](#) [3030403](#) [3690103020](#) [HNY-LT15CU4241](#) [1170-](#)  
[3/8"x18yd](#)