


## DCS-1



## 2.8 mm female terminals (box version)

## Features

- DCS-1 technology
- Long box in CuSn
- 5 mm pitch for unsealed application
- 6 mm pitch for sealed application with single wire seal
- Lanceless design
- Protected contact springs
- Low contact mating force
- Selective gold-plated versions available
- Crimp code on terminal

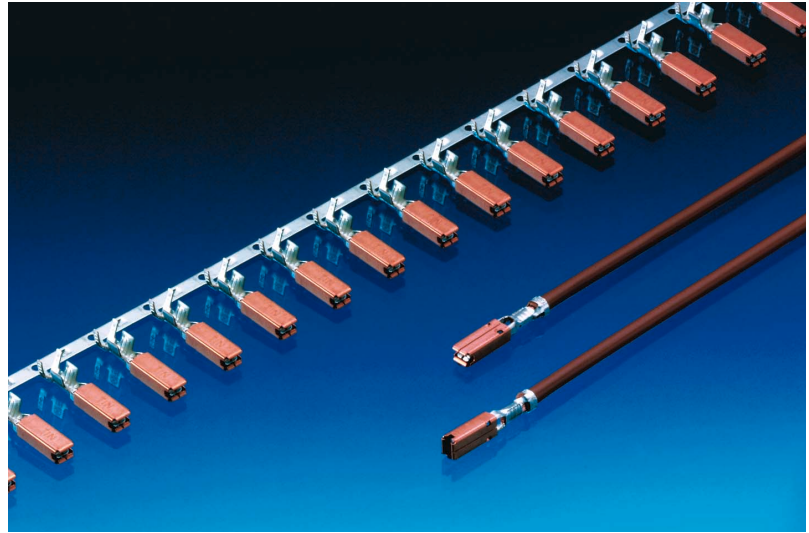

## Performance characteristics\*

- Contact resistance: < 3 m $\Omega$
- Contact mating force: < 9 N
- Contact unmating force: < 6 N
- Current carrying capacity with 2.5 mm<sup>2</sup> wire:
 

at 23°C up to approx.:	28 A
at 85°C up to approx.:	17 A
at 100°C up to approx.:	14 A

\* Mated with 2.8 x 0.8 mm DCS-1 male terminals (Sn)

## Packing

- No. of terminals per reel: Consult us
- No. of reels per packing: Consult us

## Tooling

- Manual crimping tool: Consult us
- Mini applicator: Consult us

Part Numbers	Type	Wire size range (in mm <sup>2</sup> /AWG)		Insulation $\varnothing$ (in mm) Max.	Material	Plating
		Min.	Max.			
6 001 26 11	Female	0.22	0.35	1.30 (FLRY wire)	CuSn/CuSn	Sn
6 001 26 31	Female	0.5	1.00	2.10 (FLRY wire)	CuSn/CuSn	Sn
6 001 26 41	Female	> 1.0	2.50	3.00 (FLRY wire)	CuSn/CuSn	Sn
6 001 26 71	Female	AWG 22			CuSn/CuSn	Sn
6 001 26 81	Female	AWG 20-B & 18B		2.06 (AWG wire)	CuSn/CuSn	Sn
6 001 26 91	Female	AWG 16-B & 14B		2.69 (AWG wire)	CuSn/CuSn	Sn
6 001 26 14	Female	0.22	0.35	1.30 (FLRY wire)	CuSn/CuSn	Au
6 001 26 34	Female	0.5	1.00	2.10 (FLRY wire)	CuSn/CuSn	Au
6 001 26 74	Female	AWG 22			CuSn/CuSn	Au
6 001 26 84	Female	AWG 20-B & 18 B		2.06 (AWG wire)	CuSn/CuSn	Au



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Connectors](#) category:*

*Click to view products by [APTIV](#) manufacturer:*

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [629515004020001](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#)  
[F258300-B](#) [F358300-B](#) [F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#)  
[968782-1](#) [GT17SA-8DS-HU](#) [98891-1012](#) [98947-1016](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#)  
[12052225-L](#) [12052466](#) [12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#)  
[12047946-B](#) [12047957](#) [12047957-L](#) [12059473](#) [12066261](#)