



EmQ-i2506



Intel® Atom™ N2600 Qseven™ CPU Module



Features

- **Fanless Design**
- Soldered Onboard Intel® Atom™ N2600 Processor
- Integrated Gigabit Ethernet
- Single Channel 18-bit LVDS, Analog RGB, DDI Port
- **Extended Operating Temp.: -20 ~ 70°C**

System

CPU	Soldered onboard Intel® Atom™ N2600 1.6GHz processor
Memory	Soldered onboard 2GB DDR3 SDRAM
Chipset	Intel® PCH NM10
BIOS	AMI UEFI BIOS
Watchdog Timer	1~255 levels reset

I/O

USB Port	8 x USB 2.0 ports
Expansion Bus	3 x PCIe x1 lanes LPC (Low Pin Count) interface
Storage	2 x Serial ATA ports with 300MB/s HDD transfer rate
Ethernet Chipset	1 x Intel® 82583V PCIe GbE controller
Audio	HD Audio Link


Display

Graphics Chipset	Integrated Intel® Graphics Media Accelerator 3600 LCD: Single Channel 18-bit LVDS, resolution up to 1366x768
Graphics Interface	Support Analog RGB signals (via Qseven GF reserved pin) 1 x DDI port


Mechanical & Environmental

Power Requirement	5V, 5VSB
Power Consumption	1.26A@+12V (Typical)
Operating Temp.	-20 ~ 70°C (-4 ~ 158°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Dimension (L x W)	70 x 70 mm (2.76" x 2.76")

Dimensions

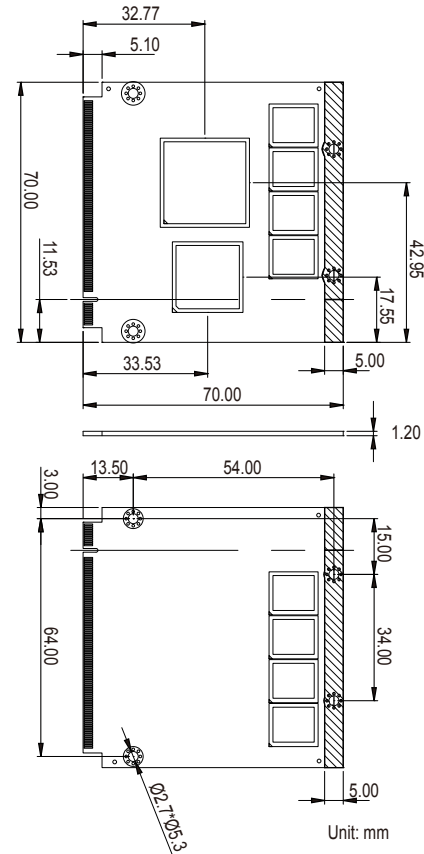

Block Diagram

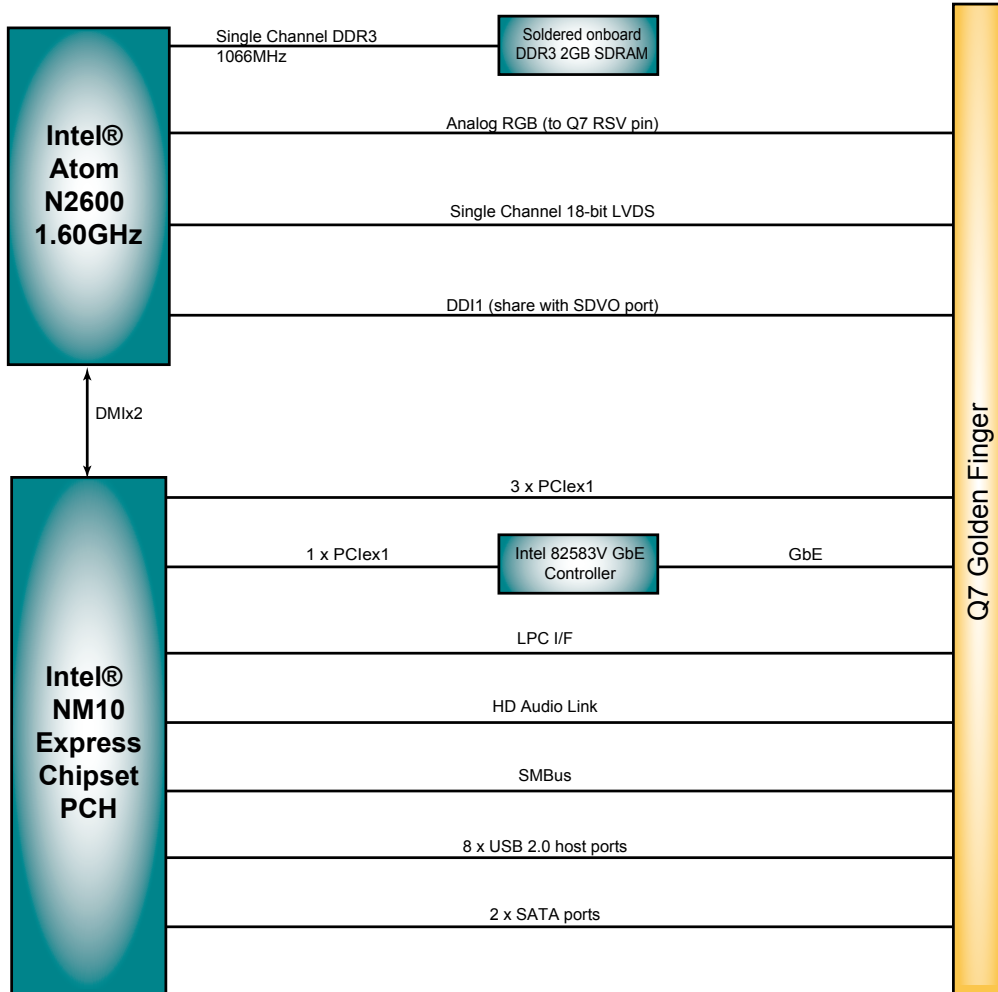

Ordering Information

EmQ-i2506 Intel® Atom™ N2600 1.6GHz Qseven™ CPU module

StarterKit-003-2506 Qseven™ Starter Kit for EmQ-i2506

Optional Accessories

HS-2506-F1 Heat spreader (70.0x65.0x8.0mm)

HS-0000-W3 Universal evaluation heatsink kit for Qseven CPU module (70x70x30mm)

PBQ-3000 Qseven™ EPIC evaluation board

Page 60

CBK-06-3000-00 Cable kit

- 1 x USB cable
- 1 x USB2 cable
- 2 x Serial port cables
- 1 x SATA cable
- 1 x SATA power cable

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - x86 category](#):

Click to view products by [Arbor Technology manufacturer](#):

Other Similar products are found below :

[conga-MEVAL](#) [iQ7-DB-MATX-R10](#) [IT6/COMe Carrier](#) [DFR0453](#) [Q7-BASE-R01](#) [Starterkit-CFE-E-2176M-3DIMM/M48G](#) [Starterkit-COM Express 6](#) [VIZI-AI LEC-AL-E3940-AI-4G-32G/EMEA](#) [VPX-R300](#) [AKX00002](#) [AKX00002SL](#) [CEB94701](#) [7000-54864-102-101](#) [ARDUINO2.AL.B](#) [ARDUINO.AL.B](#) [GT.PDKW](#) [IOTGTWY.DK110](#) [IOTGTWY.DK200](#) [IOTGTWY.DK300](#) [IOTGTWY.DK50](#) [MIKROE-2582](#) [102010028](#) [110060064](#) [110060382](#) [110060577](#) [SOM-DB5800-00A2E](#) [ROM-DB7500-SCA1E](#) [conga-QEVAL/Qseven 2.0](#) [conga-QKIT X7EVAL/ind](#) [34101-0000-00-2](#) [68300-0000-00-0](#) [MIKROE-2546](#) [DEV-13033](#) [ETXDB1](#)