



# Series 652000 and 653000 RoHs/WEEE-Compliant PLCC-to-DIP Adapter

## FEATURES


- Converts PLCC packaged ICs-to-DIP footprints.
- Ideal for prototyping and testing/evaluation.
- Available with PLCC Sockets or PLCC Pads on top side.
- Consult factory for Panelized Form or for mounting of consigned ICs.

## GENERAL SPECIFICATIONS

- ADAPTER BODY: 0.062 [1.58] FR-4 or IS410 per IPC 4101A/26 with 1-oz. Cu traces, both sides finished with ENIG (Immersion Au over Electroless Ni)
- PINS: Brass 360 1/2-hard per UNS C36000, ASTM B16/B16M
- PIN PLATING: 10μ [0.254μ] min. Au per MIL-G-45204 over 100μ [2.54μ] Ni per SAE AMS-QQ-N-290
- OPTIONAL PLCC SURFACE MOUNT SOCKETS: UL 94V-0 PPS
- SOCKET CONTACTS: Phosphor Bronze, Pb-plated (RoHS-compliant)
- CURRENT RATING: 1 amp
- OPERATING TEMPERATURE: 221°F [105°C]

## MOUNTING CONSIDERATIONS

- SUGGESTED PCB HOLE SIZE: 0.028 ±0.003 [0.71 ±0.08] dia.
- Will plug into standard IC socket
- See Table for Pad Layout when mounting PLCC socket

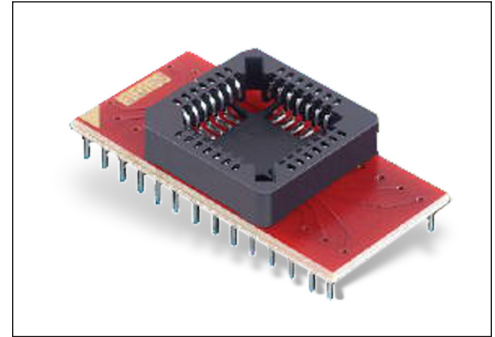

**CUSTOMIZATION:** In addition to the standard products shown on this page, Aries specializes in custom design and production. Special materials, platings, sizes, and configurations can be furnished, depending on the quantity. **NOTE:** Aries reserves the right to change product general specifications without notice.

## ORDERING INFORMATION

### XX-65X000-11-RC

No. of Pins  
28, 32, 44, 68, 84


Au Solder Pin Tail  
RoHS-compliant

Series  
652000: without socket  
653000: with socket

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

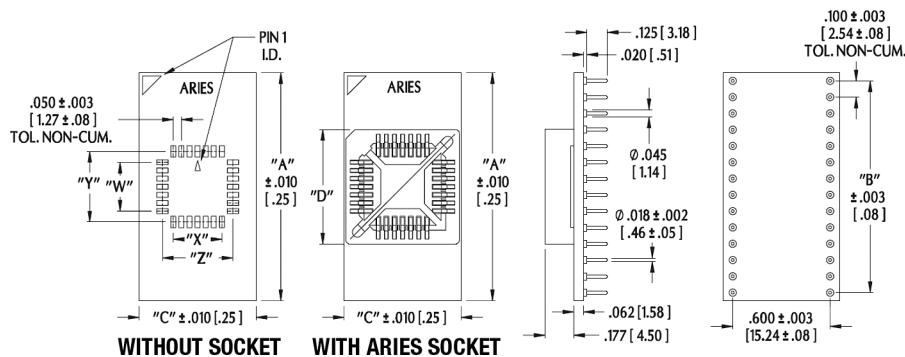

Pins	Dim. "A"	Dim. "B"	Dim. "C"	Dim. "D"	Dim. "W" ±0.003 [0.08] non-cumulative	Dim. "X" ±0.003 [0.08] non-cumulative	Dim "Y" ±0.003 [0.08]	Dim. "Z" ±0.003 [0.08]	Pad Size
28	1.400 [35.56]	1.300 [33.02]	0.705 [17.91]	0.703 [17.86]	0.300 [7.62]	0.300 [7.62]	0.449 [11.41]	0.449 [11.41]	0.024 x 0.076 [0.61 x 1.93]
32	1.600 [40.64]	1.500 [38.10]	0.705 [17.91]	0.805 [20.45]	0.400 [10.16]	0.300 [7.62]	0.549 [13.95]	0.448 [11.39]	0.024 x 0.076 [0.61 x 1.93]
44	2.200 [55.88]	2.100 [53.34]	0.910 [23.11]	0.910 [23.11]	0.500 [12.70]	0.500 [12.70]	0.670 [17.02]	0.670 [17.02]	0.026 x 0.076 [0.66 x 1.93]
68	3.400 [86.36]	3.300 [83.32]	1.220 [30.99]	1.220 [30.99]	0.800 [20.32]	0.800 [20.32]	0.945 [24.00]	0.945 [24.00]	0.026 x 0.076 [0.66 x 1.93]
84	4.200 [106.68]	4.100 [104.14]	1.420 [36.07]	1.421 [36.09]	1.000 [24.40]	1.147 [29.13]	1.147 [29.13]	1.147 [29.13]	0.026 x 0.080 [0.66 x 2.03]



Bristol, PA 19007-6810 USA  
 TEL (215) 781-9956 • FAX (215) 781-9845  
 WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



18014RC  
Rev. AB

PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [IC & Component Sockets](#) category:*

*Click to view products by [Aries](#) manufacturer:*

Other Similar products are found below :

[0066-3-17-15-30-14-02-0](#) [670](#) [672](#) [673](#) [694-13-640-00-672-000](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-308-41-007000](#) [PX-68LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [12-3513-11](#) [123-91-320-41-001000](#) [126-43-310-41-002000](#) [AKSUN 37V-T](#) [1437503-9](#) [1437504-1](#) [146-44-308-41-013000](#) [146-43-308-41-012000](#) [160-10-308-00-001000](#) [160-40-320-00-001000](#) [214-99-306-01-670800](#) [232-1270-02-0602](#) [2-382761-4](#) [2-5331677-4](#) [2-640360-3](#) [2801-2-00-50-00-00-07-0](#)