


eBOX510-820-FL

Fanless Embedded System with Intel® Atom™ Processor Z510/ Z530
up to 1.6 GHz



▲ Front view

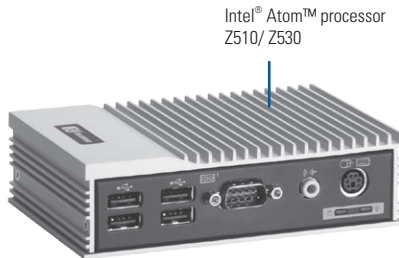

Specifications

Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	Intel® Atom™ processor Z510 (1.1 GHz) or Z530 (1.6 GHz)
System Memory	1 x 200-pin DDR2 SO-DIMM max. up to 2 GB
Chipset	Intel® US15W core logic
BIOS	Phoenix-Award
System I/O Outlet	1 x RS-232 (COM 1) 1 x VGA 1 x Audio (Line-out) 1 x PS/2 keyboard/mouse 1 x 10/100/1000Mbps Ethernet (Realtek RTL8111B) 4 x USB 2.0 1 x VDC 5V power input connector
Watchdog Timer	255 levels, 1 ~ 255 sec.
Storage	1 x CompactFlash™ slot
Expansion Interface	N/A
System Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Power Supply	Input: AC 100 ~ 240V, AC 25W adapter with lock Output: DC 5V @ 5A
Operating Temperature	0° ~ +50°C (32°F ~ 122°F) (with W.T. CF)
Storage Temperature	-20°C ~ +80°C (-4°F ~ +176°F)
Humidity	10% ~ 90%, no-condensing
Dimensions	132 mm (5.19") (W) x 95.4 mm (3.75") (D) x 37.5 mm (1.47") (H)
Weight (net/gross)	0.48 kg (1.06 lb)/0.5 kg (1.1 lb)
Certification	CE
EOS Support	XPE, WinCE, Linux, WES, WES7

* XPE: Windows® XP Embedded

* WES: Windows® XP Embedded Standard

* WES7: Windows® XP Embedded Standard 7

* WES8: Windows® XP Embedded Standard 8

Packing List

- 1 x quick manual
- 1 x driver CD
- 1 x Y cable for PS/2 keyboard/mouse
- 1 x screw pack
- 4 x foot pad
- 1 x power adapter
- 1 x wall mount kit
- 1 x power cord

Features

- Intel® Atom™ processor Z510 (1.1 GHz) or Z530 (1.6 GHz) onboard
- Intel® US15W core logic chipset
- Ultra slim and power-efficient design
- Supports 4 USB 2.0 ports and 1 COM port
- Supports 10/100/1000Mbps Ethernet
- Supports CompactFlash™



▲ Rear view

Power Protection

AC Version

OVP (over voltage protection)

SCP (short circuit protection)

OPP (over power protection)

Ordering Information

Standard

eBOX510-820-FL 1.1G Fanless embedded system with Intel Atom processor Z510 1.1 GHz, 25W AC/DC adapter

eBOX510-820-FL 1.6G Fanless embedded system with Intel Atom processor Z530 1.6 GHz, 25W AC/DC adapter

Optional

DDR2 SODIMM 512 MB ~ 2 GB

CompactFlash 1 GB or above


Din rail kit

VESA mount kit

Power cord

*Specifications and certifications are based on options and may vary.

Dimensions

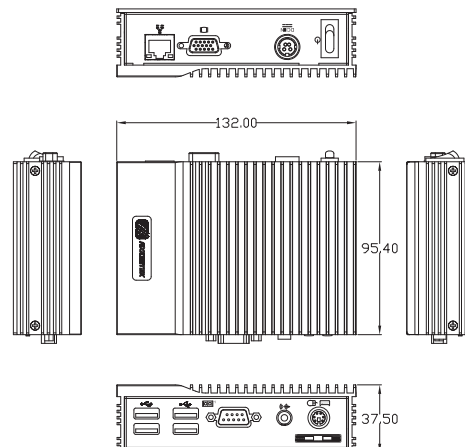

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#) [AIMB-](#)
[T1215DA-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#) [APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-](#)
[S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-10A1E](#) [ITA-1711-10A1E](#) [MIC-710AI-00A1](#) [MIC-720AI-00A1](#) [UNO-247-](#)
[J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#) [EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-](#)
[I7](#) [SI-606](#) [SI-60E](#) [TANK-760-HM86i-i5/4G-R10](#) [BKCM8i7CB8N](#)