
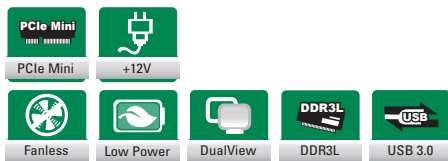
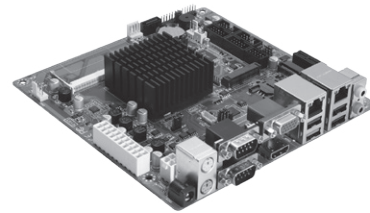


MAN0842

Mini-ITX with Intel® Celeron® Processor J1900 (up to 2.42 GHz), VGA/HDMI/LVDS, USB 3.0, Mini PCIe Card and HD Audio

Features

- Intel® Celeron® processor J1900 2.0 GHz
- 1 DDR3L-1333 SO-DIMM, up to 8GB
- PCIe x1 supported
- 1 USB 3.0 and 5 USB 2.0 ports
- 1 SATA-300 and 1 mSATA slots
- 6 COM ports
- 12 VDC and ATX
- VGA/HDMI/LVDS with dual-view supported

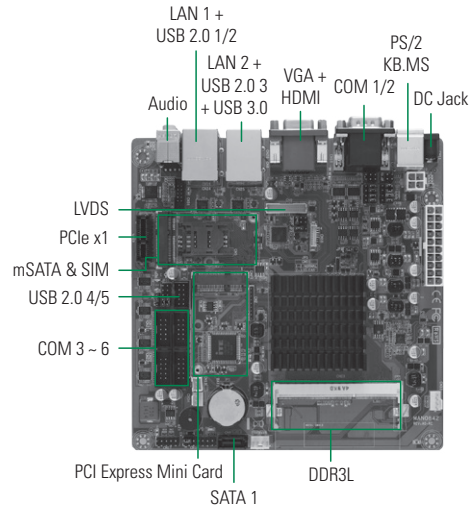

Core System

CPU	Intel® Celeron® processor J1900 (up to 2.42 GHz) quad core SoC (Bay Trail)
System Memory	1 x 204-pin DDR3L-1333 SO-DIMM dual channel, up to 8GB
Chipset	SoC integrated
BIOS	AMI
SSD	mSATA slot
Watchdog Timer	255 levels, 1 ~ 255 sec.
Expansion Interface	1 x PCIe x1 1 x PCI Express Mini Card 1 x SIM card slot
Battery	Lithium 3V/220 mAh
Power Requirements	12VDC or STD ATX
Size/Weight	170 x 170 mm
Board Thickness	1.6 mm
Temperature	0°C ~ +60°C (+32°F ~ +140°F), operation.
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x PS/2 Keyboard & mouse 2 x RS-232/422/485 (rear I/O) 4 x RS-232
SATA	1 x SATA-300 1 x mSATA
Ethernet	2 x Realtek RTL8111F for Gigabit LAN support WoL & PXE
Audio	HD Audio as Mic-in/Line-out with Realtek ALC662
USB	5 x USB 2.0 1 x USB 3.0; (rear I/O: 1 x USB 3.0 + 3 x USB 2.0)
TPM	N/A
Digital I/O	8 Channels programmable
SM BUS	N/A

Display

Chipset	Intel® HD graphics
Memory Size	Shared memory
Display Interface	1 x VGA 1 x HDMI 1 x LVDS 18/24-bit dual channel

Packing List

Standard	I/O Bracket, Driver CD
-----------------	------------------------

Ordering Information

Standard	MAN0842VHGGGA (P/N: E38M842101)	Mini-ITX SBC with Intel® Celeron® J1900, VGA/HDMI/LVDS, 2 GbE LANs, USB 3.0, PCI Express Mini Card and HD audio
Optional	59411500600E	SATA power cable 4P 180 mm (RC)
	59386831000E	USB x 2, 2 x 5P 2.54 mm, L=180 mm
	59380703000E	COM port x 2 with bracket P=2.54 mm
	50956124040E	AC Adapter 60W/12V5A/Φ2.5



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)
[OLINUXINO-MICRO-E8GS16M-IND](#)