

MANO861

Mini-ITX SBC with LGA1155 Socket 3rd Gen Intel® Core™ Processor, Intel® H61, VGA/DVI-D/LVDS, Dual LANs and HD Audio

Features

- LGA1155 socket 3rd gen Intel® Core™ i7/i5/i3 & Celeron® processor
- Intel® H61
- 2 DDR3-1066/1333 SO-DIMM, up to 16GB
- 1 PCIe x4 supported
- 3 SATA-300
- 6 USB 2.0 ports
- 6 COM ports
- VGA/DVI-D/LVDS with dual-view supported





Core System

CPU	LGA1155 socket 3rd generation Intel® Core™ i7/i5/i3 and Celeron® processors
System Memory	2 x 204-pin DDR3-1333/1600 SO-DIMM, up to 16GB
Chipset	Intel® H61
BIOS	AMI UEFI BIOS
SSD	N/A
Watchdog Timer	255 levels, 1 ~ 255 sec.
Expansion Interface	1 x PCIe x4 1 x PCI Express Mini Card (Shared USB & mSATA)
Battery	Lithium 3V/ 220 mAH
Power Requirements	+5V @ 1.7A, +12V @ 5.9A, +5Vsb @ 0.1A, +3.3V @ 1.0A
Size	170 x 170 mm
Board Thickness	1.6 mm
Temperature	0°C ~ +60°C (32°F~ 140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x RS-232/422/485 (COM 1) 5 x RS-232 (COM 2-6)
SATA	3 x SATA-300
Hardware Monitoring	Detect CPU/System temperature, voltage and fan speed
Ethernet	1st port as 10/100/1000 Mbps supports WOL, PXE with Realtek 8111E (LAN1) 2nd port as 10/100/1000 Mbps supports WOL, PXE with Realtek 8111E (LAN2)
Audio	HD audio as MIC-in/Line-out with Realtek ALC892
USB	6 x USB 2.0
TPM	N/A
SMBus	N/A
Digital IO	8 Channels (4-IN & 4-OUT)

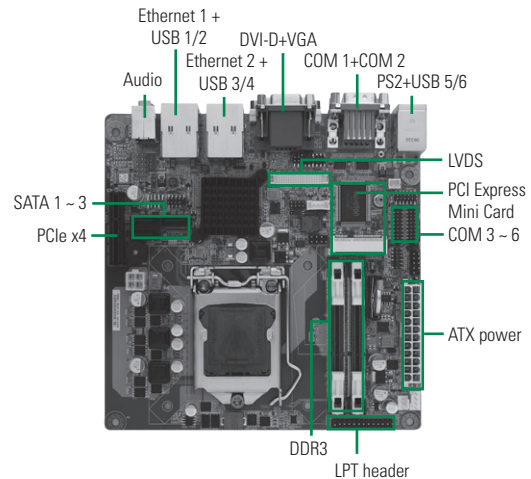

▲ Side view

Display

Chipset	Intel® Integrated graphics
Memory Size	Shared memory
Display Interface	1 x VGA 1 x DVI-D 1 x LVDS

Packing List

User's manual/utility CD, cable

Ordering Information

Standard	
MANO861VGGA (P/N: E38M861100)	Mini-ITX SBC with LGA1155 socket 3rd generation Intel® Core™ i7/i5/i3 & Celeron®, VGA/DVI-D/LVDS, 2 GbE LANs, 6 COM and audio
Optional	
5938M861010E	COM Port Cable, 10 x 2P, P=2.0 mm, L=300 mm



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)
[OLINUXINO-MICRO-E8GS16M-IND](#)