


SBC84833

Intel® Atom™ N270 3.5" Embedded SBC with Intel® 945GSE + ICH7M Chipset, LVDS/VGA, DualView, 4 COM and Single LAN

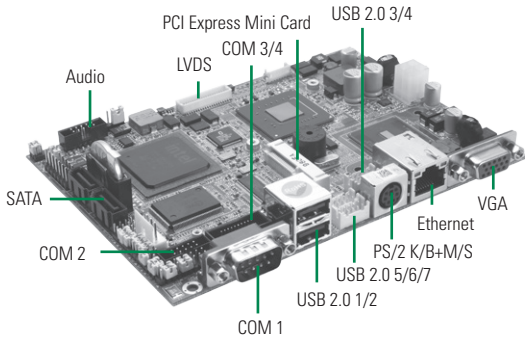

Fanless Low Power DualView PCIe Mini

System


CPU	Intel® Atom™ processor N270 1.6 GHz onboard with FSB 533 MHz
System Memory	1 x 200-pin SO-DIMM supports DDR2-400/533 max. up to 2 GB
Chipset	Intel® 945GSE + ICH7M
BIOS	AMI
SSD	1 x CompactFlash™ type-II
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x PCI Express Mini Card V1.2
Battery	Lithium 3V/220 mAh
Power Input	2 x 2-pin connector +12V DC-in only AT Auto Power ON function supported
Power Requirements	Intel® Atom™ N270 @ 1.6 GHz, 1GB DDR2 Max. RMS: +12V @ 978mA
Size	146 x 104 mm
Board Thickness	1.6 mm
Operating Temperature	Standard: 0° ~ +60°C (32°F ~ 140°F) Optional: -20°C ~ +70°C (-4°F ~ +158°F)
Relative Humidity	10% ~ 95% relative humidity, non-condensing

I/O


MIO	1 x PS/2 keyboard and mouse 3 x RS-232 (COM 2/3/4); with +5V/+12V powered 1 x RS-232/422/485 (COM 1); with +5V/+12V powered
SATA	2 x SATA-150
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	1 port as 10/100/1000Mbps supports Wake-on-LAN, RPL/PXE Boot ROM with Realtek RTL8111DL
Audio	HD Codec audio as MIC-in/Line-in/Line-out/Speaker-out with Realtek ALC662
USB	7 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	8 channels IN/OUT programmable

Features

- Intel® Atom™ processor N270 1.6 GHz with FSB 533 MHz
- With Intel® Gen. 3.5 high performance integrated graphic controller for VGA and LVDS
- 7 USB 2.0 ports
- 4 COM ports
- PCI Express Mini Card expansion
- Display: LVDS/VGA



▲ Top view



▲ Rear view

CF type-II

DDR2 SO-DIMM

Display

Chipset	Intel® GMA 950 graphics core
Memory Size	Intel® DVM T 3.0 compliant
Display Interface	1 x VGA 1 x LVDS; 18-bit single channel (SBC84833VGA-N270 w/18-bit LVDS) 1 x LVDS; 18/24-bit single/dual channel (SBC84833VGA-N270 w/24-bit LVDS)

Packing List

Standard

Quick installation guide, user's manual/utility CD, cable

Cable

Part Number	Description	Qty
59380000300E	2 x COM w/ bracket P=1.27 x 2.54 L=300 mm	1
59384500100E	Audio cable w/ bracket P=2,450 mm	1
59382631000E	2 x USB 2.0 wafer cable w/ bracket 180 mm	1

Ordering Information

Standard

SBC84833VGA-N270	3.5" SBC with Intel® Atom™ processor N270, VGA/24-bit w/ 24-bit LVDS (P/N: E384833100)
SBC84833VGA-N270	3.5" SBC with Intel® Atom™ processor N270, VGA/18-bit w/ 18-bit LVDS (P/N: E384833101)

Optional/MOQ

SBC84833VGA-N270	3.5" SBC with Intel® Atom™ processor N270, VGA/18-bit w/18-bit LVDS & WT (P/N: E384833102)
------------------	--

* W.T.: Wide Temperature

SBC Services and Solutions

Systems on Modules

Embedded SBCs >EPIC

Embedded SBCs >3.5" Capa

Embedded SBCs >Nano-ITX

Embedded SBCs >Pico-ITX

Embedded SBCs >PC/104

Industrial Motherboards

Slot CPU Cards

Accessories

Appendix

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN](#) [AmITX-SL-G-Q170](#) [IB100](#) [CM3-BT4-E3845](#) [MVME61006E-2173R](#) [20-101-0738](#) [PCE-4128G2-00A1E](#) [RSB-4220CS-MCA1E](#) [SHB230DGGA-RC](#) [IB909AF-5650](#) [AmITX-BT-I-E3815](#) [PICO841VGA-E3827](#) [IMB210VGGA](#) [MI981AF](#) [RSB-4221CS-MCA1E](#) [PCE-9228G2I-00A1E](#) [IB915F-3955](#) [IB909F-5010](#) [MI958F-16C](#) [UPS-P-8G-64GB-PACK](#) [S2600WFT](#) [IB915AF-6300](#) [S2600STB](#) [BBS2600BPS](#) [IB915F-6100](#) [Nit6QP_MAX](#) [MI990VF-X28-E](#) [MI990VF-6820](#) [MI991AF-C236](#) [94AC6636](#) [BANANA PI BPI-M4](#) [BLKNUC7I3DNHNC1978015](#) [BLKNUC7I5DNK1E 960791](#) [IOT-LS1012A-OXALIS](#) [NITX-300-ET-DVI](#) [94AC6633](#) [A33-OLINUXINO-N8G](#) [A64-OLINUXINO-1GE16GW](#) [A20-SOM-E16GS16M](#) [A20-SOM204-1G-M](#) [EMB-APL1-A10-3350-F1-LV](#) [PICO-APL1-A10-F001](#) [PICO-APL4-A10-F003](#) [ODYSSEY - STM32MP157C BOARD WITH SOM](#) [BEAGLEBONE GREEN GATEWAY DEV BOARD](#) [ODYSSEY - X86J4105864 8GB RAM 64GB EMMC](#) [ODYSSEY -X86J4105864 8GB/64GB ENTERPRISE](#) [ODYSSEY - X86J4105800 8GB RAM](#) [VISIONDK-STM32MP1 V.1.0](#)