

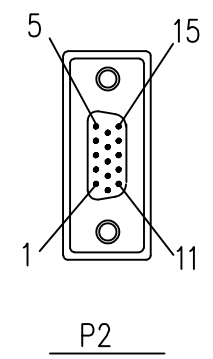
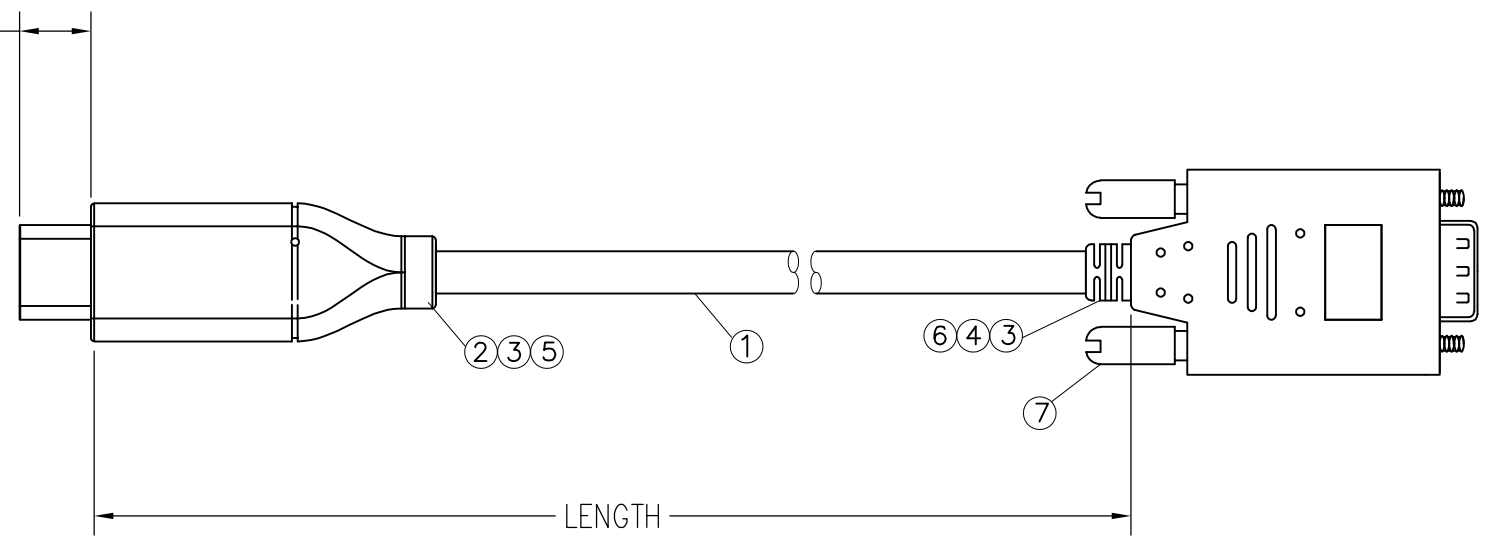


DATE	REV	ECN	APP'D. BY
12/22/20	A0	RELEASED	ADB
-	-	-	-

.262 ±.008 [6.65 ± .20]



Pin Assignment

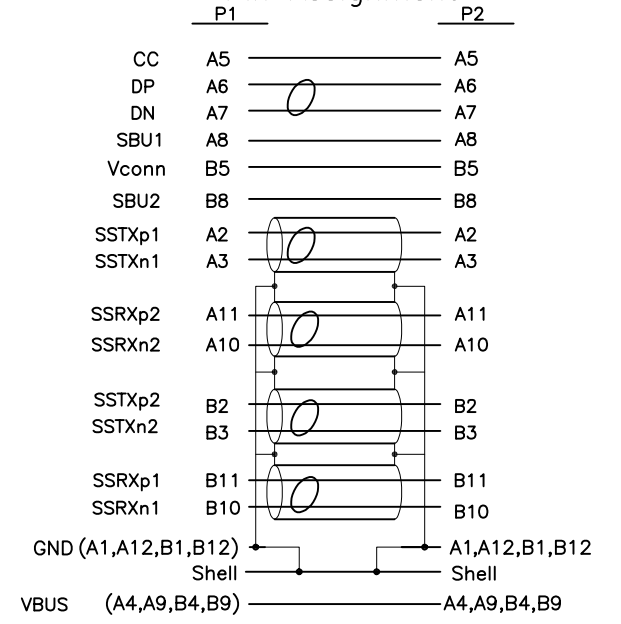


Notes:

- Cable:
 - USB 3.1 [34AWG(7/0.06TC)+EAM]*4P+32AWG(7/0.08TC)*2C+26AWG (7/0.16TC)*2C+32AWG(7/0.08TC)*4C+AB (16/10/0.08 85%TC)OD:4.2MM
 - JACKET COLOR: BLACK.
 - CABLE MARKING: E515987 兎 AWM STYLE 2725 80°C 30V VW-1 RoHS C1
- Connector P1:
 - USB C MALE 3.1, GOLD FLASH ON SHELL, WITH PCB, BLACK INSULATOR.
- Molded Boot: 45P PVC color Black
- DP M ABS SHELL Color: Black
- TRANSPARENT DUST COVER
- Connector P2:
 - UTCV-9FT With PCB SHELL Gold Plated
- SCREW: #4-40UNC 2.8*58.25MM
- Electrical Test:
 - 100%Test(Open ,Short ,Wire Map)
 - CONTACT RESISTANCE 3 OHM MAX
 - INSULATION RESISTANCE: 10M OHM MIN
 - HI-POT: 300V DC/10 ms
 - RESOLUTION: 1920 * 1200
- PACKAGING: EACH CABLE ASSEMBLY TO BE INDIVIDUALLY BAGGED

P/N	LENGTH
BC-VC003F	3 FT ±.79" [915 mm ±20 mm]
BC-VC006F	6 FT ±1.18" [1830 mm± 30mm]
BC-VC010F	10 FT ±1.97" [3050 MM± 50mm]

THIRD ANGLE PROJECTION



206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
<http://www.belfuse.com>

DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

TITLE: USB TYPE C MALE 3.1 TO VGA


DIMENSIONS: INCHES [METRIC]
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.

DRN BY: GL DATE 12/18/20

APPD BY: ADB DATE 12/21/20

DWG NO. CT999238 REV. A0



SHEET NO. 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Cables / IEEE 1394 Cables](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[68768-0173](#) [FNY-W6003-01](#) [88764-0800](#) [148700-1](#) [17-200621](#) [17-250051P](#) [954](#) [17-200261](#) [AC102012-1](#) [AC102012-2](#) [FTP-629Y601](#) [45-1345-15](#) [45-1358-15](#) [45-1363-15](#) [IP-USB1\(C10\)S-RW](#) [CABLE/RTP/USB/DT](#) [45-1351-15](#) [45-1357-15](#) [45-1433-1](#) [687680278](#)
[USBFTVX2SA2N03A](#) [USBFTV2SA2N03A](#) [USBFTV2SA2N05A](#) [MDM9PH004B](#) [MDM9PH004P](#) [FTP-629Y401](#) [FTP-628Y302](#) [FTP-628Y402](#) [CSMNB9MF-5](#) [FNY-W6022](#) [UA-30AMF-SD7B03](#) [UA-30AMFM-SL7B03](#) [USBAPSCC7202A](#) [17-200641](#) [UES-1001A160](#) [UES-1003A160](#) [USBFTVX7SA2N20A](#) [USBFTV2PEMSA2N10A](#) [FTP-629Y602](#) [USBCAMCM100](#) [USB A/F*2 to 2.54 2*5P-SH L=400mm](#)
[68784-0075](#) [MINI-SCREW-USB-DATACABLE](#) [19800-010500-200-RS](#) [103-1092-BL-F0050](#) [103-1020-BL-00100](#) [103-1092-BL-F0200](#) [103-1092-BL-F0100](#) [105-1092-BL-00300](#) [105-1092-BL-00200](#)