

BCP56

Rev.F Oct.-2023

描述 / Descriptions

SOT-223 塑封封装 NPN 半导体三极管。Silicon NPN transistor in a SOT-223 Plastic Package.

特征 / Features

大电流、低电压，无卤产品。


High current, Low voltage, HF product.

用途 / Applications


用于中功率开关电路。

Medium Power switching applications.

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning

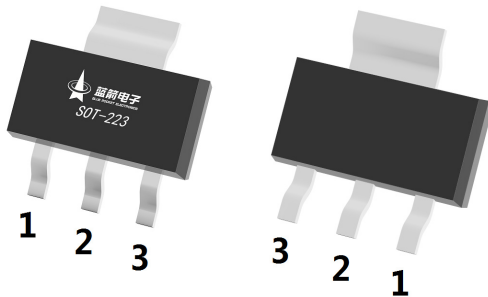

PIN1 : Base

PIN 2 : Collector

PIN 3 : Emitter

放大及印章代码 / hFE Classifications & Marking

见印章说明。

See Marking Instructions.








极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Collector to Base Voltage	V _{CBO}	100	V
Collector to Emitter Voltage	V _{CEO}	80	V
Emitter to Base Voltage	V _{EBO}	5.0	V
Collector Current - Continuous	I _C	1.0	A
Peak Pulse Collector Current	I _{CM}	1.5	A
Peak Pulse Base Current	I _{BM}	200	mA
Power Dissipation	P _D	1.2	W
Thermal Resistance, Junction to Ambient	R _{θJA}	105	K/W
Thermal Resistance, Junction to Leads	R _{θJS}	13	K/W
Junction Temperature	T _j	150	°C
Operating and Storage Temperature Range	T _{stg} T _{amb}	-65~150	°C

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Collector Cut-Off Current	I _{CBO}	V _{CB} =30V I _E =0			100	nA
		V _{CB} =30V I _E =0 T _j =125°C			10	μA
Emitter Base Cut-Off Current	I _{EBO}	V _{EB} =5.0V I _C =0			100	nA
DC Current Gain	h _{FE(1)}	V _{CE} =2.0V I _C =5mA	25			
	h _{FE(2)}	V _{CE} =2.0V I _C =150mA	100		250	
	h _{FE(3)}	V _{CE} =2.0V I _C =500mA	25			
Collector to Emitter Saturation Voltage	V _{CE(sat)}	I _C =500mA I _B =50mA			0.5	V
Base to Emitter Saturation Voltage	V _{BE(sat)}	I _C =500mA V _{CE} =2.0V			1.0	V
Transition Frequency	f _T	V _{CE} =-5V I _C =-10mA f=100MHz		130		MHz


电参数曲线图 / Electrical Characteristic Curve

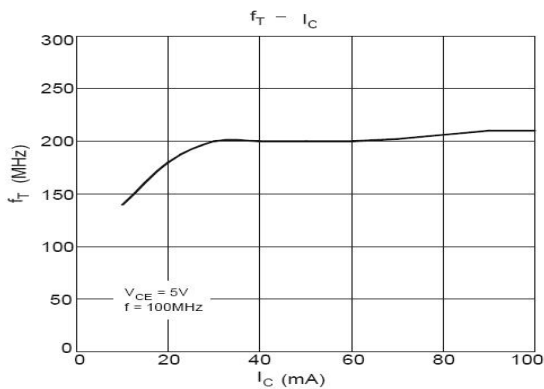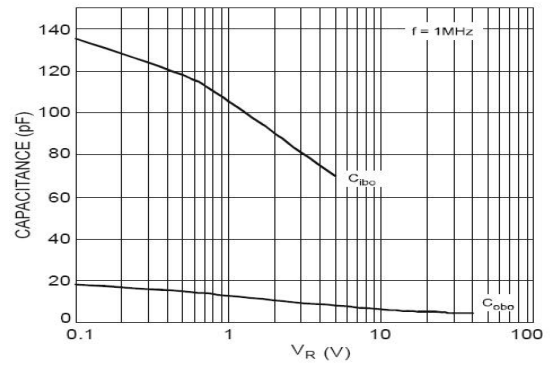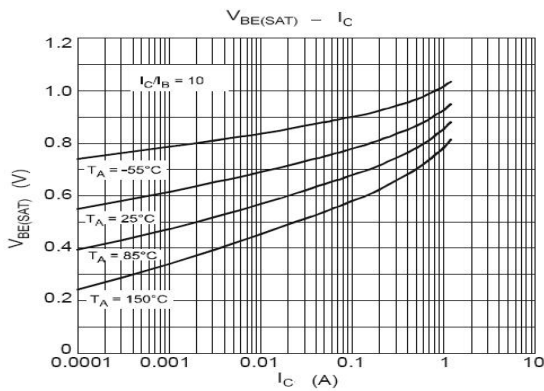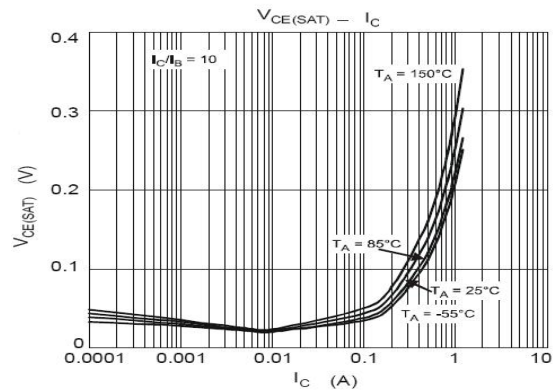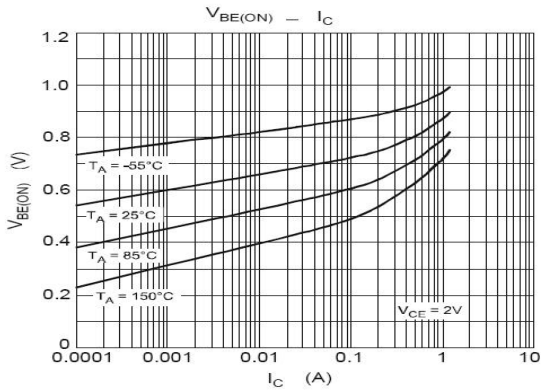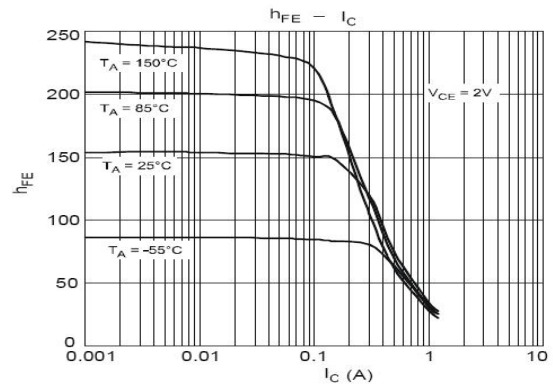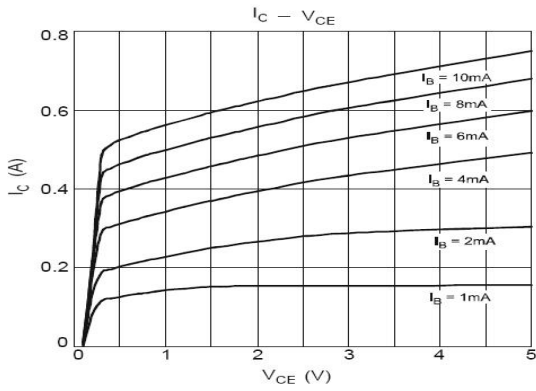

外形尺寸图 / Package Dimensions

SOT-223

单位: mm

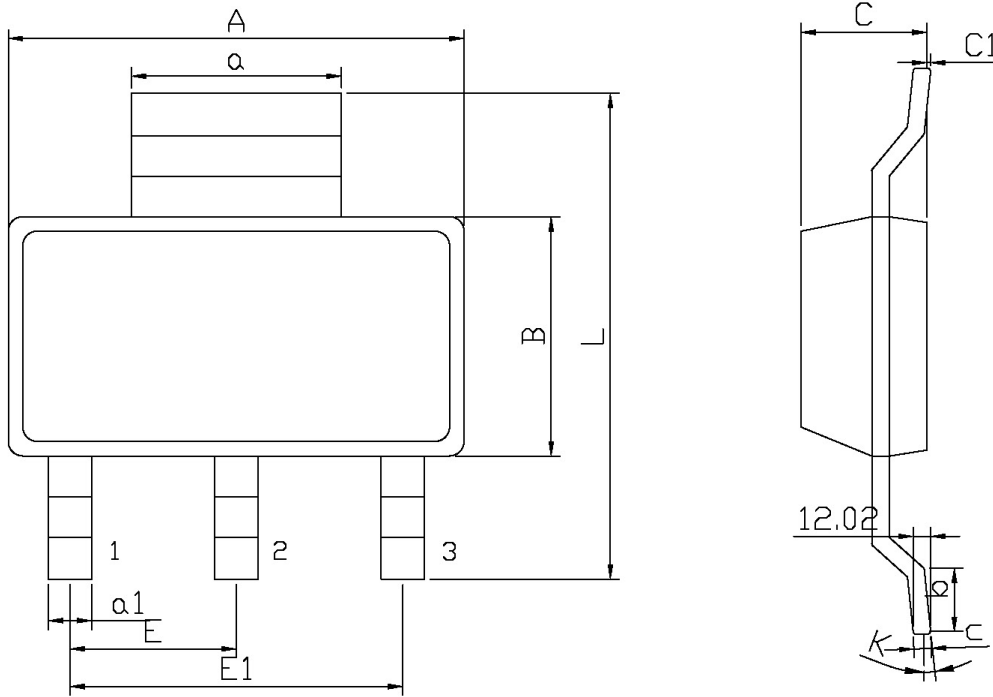

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	6.30	6.70	C	-	1.80
a	2.90	3.10	b	0.91	-
B	3.30	3.70	c	0.24	0.32
L	6.70	7.30	C1	0.02	0.10
a1	0.60	0.80	K	0°	10°
E1	4.10	5.10			
E	2.00	2.60			

印章说明 / Marking Instructions



说明：

BR： 为公司代码

BCP56： 为产品型号

****： 为生产批号代码，随生产批号变化


Note:

BR: Company Code

BCP56: Product Type

****: Lot No. Code, code change with Lot No

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

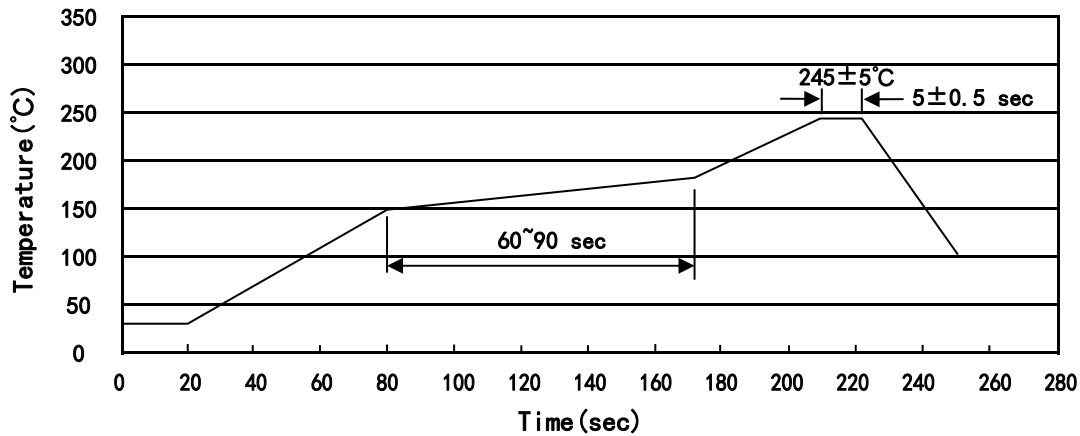

说明：

- 1、预热温度 150~180°C，时间 60~90sec;
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:150~180°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C 时间：10±1 sec. Temp.:260±5°C Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-223	2,500	2	5,000	6	30,000	13" ×12	360×360×50	380×335×366

使用说明 / Notices

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Blue Rocket manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)