


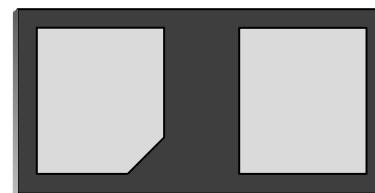

Features

- Small Body Outline Dimensions:
0.60 mm x 0.30 mm
- Bidirectional ESD Protection of one line
- Low Clamping Voltage
- Low Capacitance: 0.3 pF
- Working Voltage: 5 V
- Low Leakage Current

**DFN0603-D**

IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) ±15kV (air), ±10kV (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 4A (8/20μs)


Mechanical Characteristics

- DFN0603-D package
- Molding compound flammability rating:
UL 94V-0
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS Compliant

Applications

- Cellular handsets and accessories
- Portable electronics
- Communication systems
- Computers and peripherals

Schematic & PIN Configuration

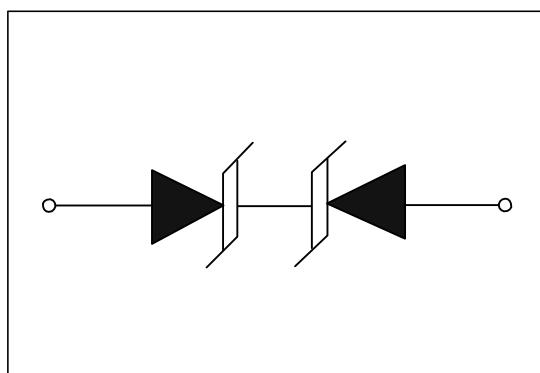


Absolute Maximum Rating

Rating	Symbol	Value	Units
Electrostatic discharge Voltage	V_{ESD}	10KV (contact)	Volts
		15KV (air)	
Operating Temperature	T_J	-55 to + 125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters (T=25°C)

Symbol	Parameter
I_{PP}	Reverse Peak Pulse Current
V_c	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

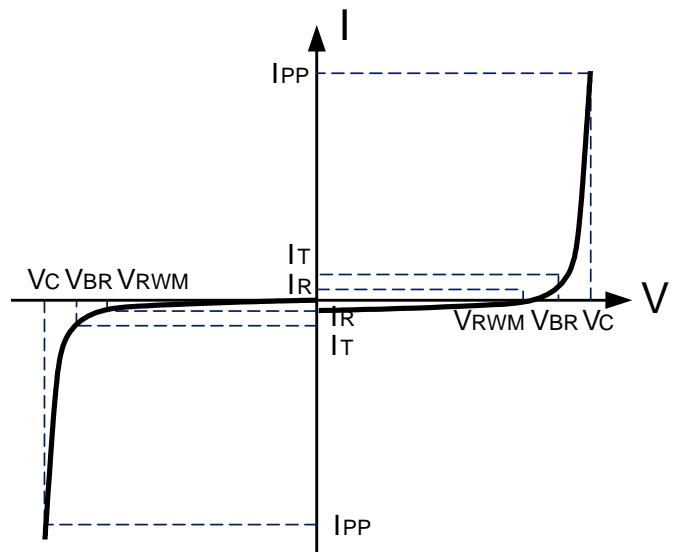**Electrical Characteristics**

BDFN1C051R						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				5.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	5.5			V
Reverse Leakage Current	I_R	$V_{RWM}=5\text{V}, T=25^\circ\text{C}$			0.1	μA
Clamping Voltage	V_c	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$			12	V
		$I_{PP}=4\text{A}, t_p=8/20\mu\text{s}$			13	
Junction Capacitance	C_j	$V_R = 0\text{V}, f = 1\text{MHz}$		0.2	0.3	pF

Note1: ESD Pulse Waveform according to IEC 61000-4-2. see Table1 and Figure4.

Note2: ESD tests Setup see Figure5.

Typical Characteristics

Figure 1: Pulse Waveform

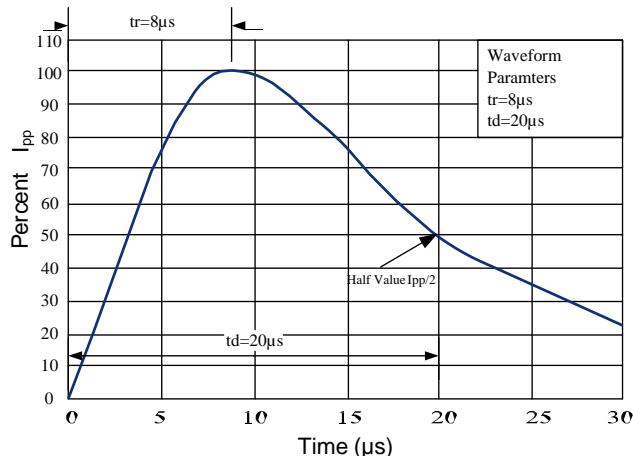


Figure 2: Power Derating Curve

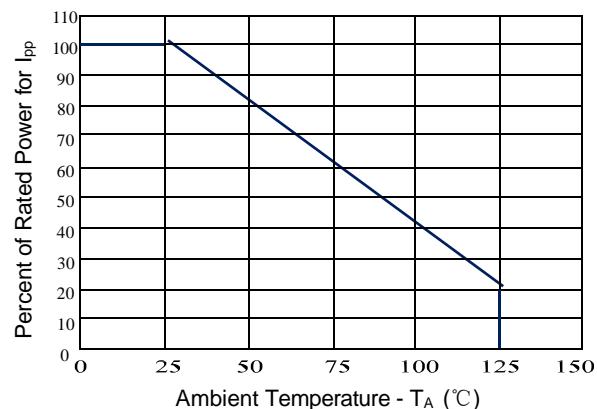


Figure 3: Normalized Junction Capacitance

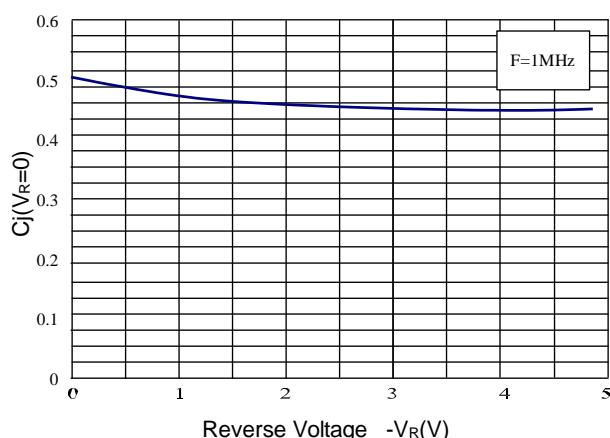


Table 1. IEC 61000-4-2 Discharge Parameters

Level	First Peak Current (A)	Peak Current at 30 ns (A)	Peak Current at 60 ns (A)	Test Voltage (Contact Discharge) (kV)	Test Voltage (Air Discharge) (kV)
1	7.5	4	2	2	2
2	15	8	4	4	4
3	22.5	12	6	6	8
4	30	16	8	8	15

Figure 4: ESD Clamping(8kV Contact per IEC 61000-4-2)


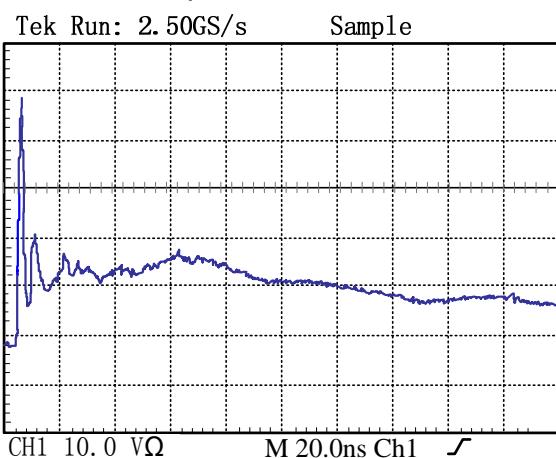




Figure 5 : IEC 61000-4-2 Waveform



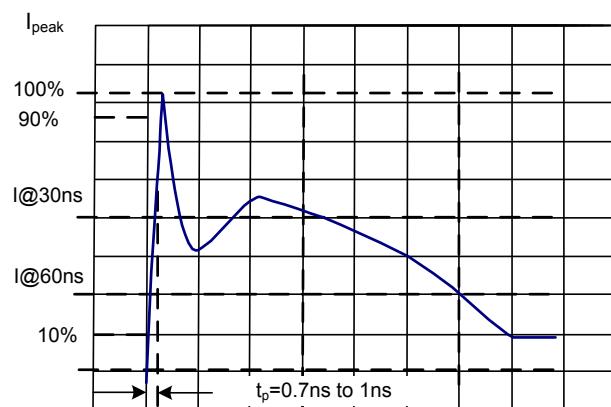


Outline Drawing –DFN0603-D

PACKAGE OUTLINE

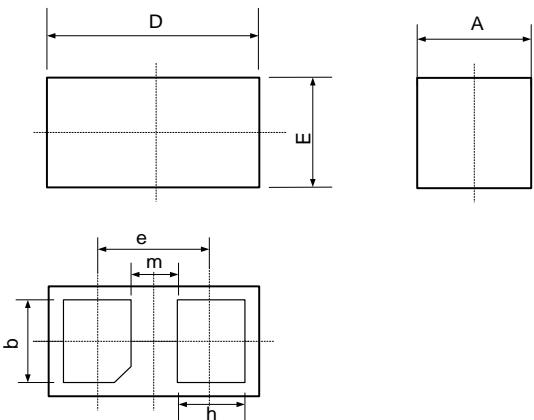

SYMBOL	MILIMETER	
	MIN	MAX
A	0.28	0.32
D	0.55	0.65
E	0.25	0.35
b	0.20	0.30
e	0.350	
m	0.165	
h	0.14	0.24

Land Pattern

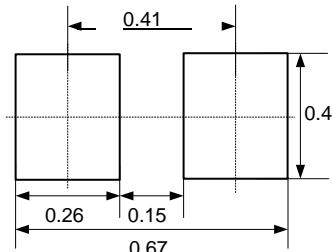

Marking Codes

Part Number	Marking Code
BDFN1C051R	U 5

Package Information

Qty: 15k/Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by Bourne manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)
[MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#)