


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WIRE SIZE AWG [mm ²]	STUD SIZE		HOUSING COLOR	DIMENSIONS - in. [mm]						WIRE STRIP LENGTH in [mm] +1/32 [0,8] -0	TOOLS
		ENGLISH	METRIC		L± .04 [1,1]	B	W± .01 [0,3]	C± .01 [0,3]	M± .02 [0,6]	H ^{+.01 [0,3]} ₋₀		
EV14-6FNB	#16-14 [1.5-2.5]	#6	M3.5	BLUE	.83 [21.0]	.165 [4.2]	.22 [5.7]	.26 [6.5]	.39 [10.0]	0.146 [3.7]	KST2000A	
EV14-8FNB	#16-14 [1.5-2.5]	#8	M4		.83 [21.0]	.165 [4.2]	.28 [7.2]	.26 [6.5]	.39 [10.0]	0.169 [4.3]		
EV14-10FNB	#16-14 [1.5-2.5]	#10	M5		.83 [21.0]	.165 [4.2]	.31 [7.9]	.26 [6.5]	.39 [10.0]	0.209 [5.3]		
EV10-8FNB	#12-10 [4.0-6.0]	#8	M4	YELLOW	1.00 [25.5]	.240 [6.1]	.33 [8.3]	.28 [7.0]	.51 [13.0]	0.169 [4.3]	11/32" [8.8]	
EV10-10FNB	#12-10 [4.0-6.0]	#10	M5		1.00 [25.5]	.240 [6.1]	.35 [9.0]	.28 [7.0]	.51 [13.0]	0.209 [5.3]		

NOTES:

- UL LISTED FOR:
 - A. STRANDED COPPER WIRE ONLY
 - B. 221°F (105°C) MAX TEMP RATING
 - C. 600V MAX VOLTAGE RATING
- MATERIAL:
 - A. STAMPING - COPPER, TIN PLATED:
 - EV14 - .031" [0,8] THICK
 - EV10 - .039" [1,0] THICK
 - B. HOUSING - VINYL
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

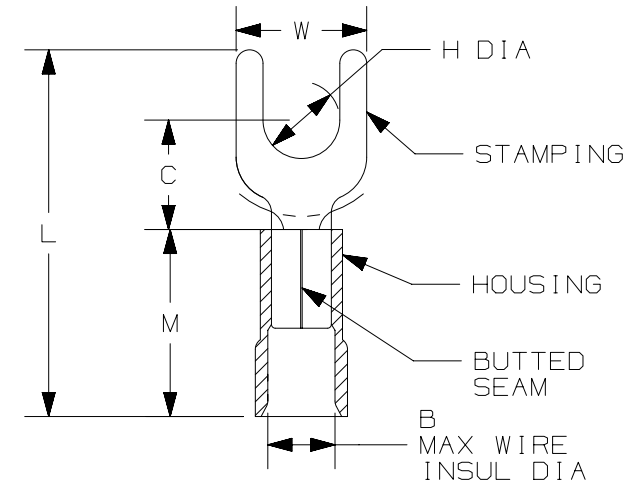

LISTED 2000 E52164

TITLE		STRONGHOLD NARROW FORK TERMINALS, VINYL INSULATED, BUTTED SEAM #16-10 AWG	
CUSTOMER DRAWING			
ITEM REVISION NAME	00123SSL/00	PANDUIT TM	
DATASET FILE NAME	00123SSL_DC/00		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES	
.X ± .XX ±		.XXX ± ANGLES ±	
THIRD ANGLE PROJECTION		DRAWING NUMBER: 00123SSL - DC	
DRAWN BY	DATE	CHK	SCALE
FES	-	FES	N.T.S.
SHEET 1 OF 1		SIZE A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	DRAWING RELEASED	00123SS

D101000DA/12

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#) [751-250](#)