


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

NOTES:

- SPECIFICATION:
 JACKET: SILICONE. MULTI-LAYER, 1ST LAYER WHITE; 2ND LAYER "COLOR" OD: .154±.008 (3.9 mm)
 CONDUCTOR: BARE COPPER, STRANDING 651 x 0.07 mm = 2.50 mm², 13 AWG.
- RATING:
 VOLTAGE: 1,000 V CAT IV PER IEC 61010-031
 CURRENT: 36 A MAX.
 TEMPERATURE: -60° C TO +180° C.
- AVAILABLE IN 3 STANDARD LENGTHS AND 6 COLORS – SEE MODEL NUMBER BELOW.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	7/11/99	
A	UPDATED FORMAT w/ CAGE CODE	4/18/04	

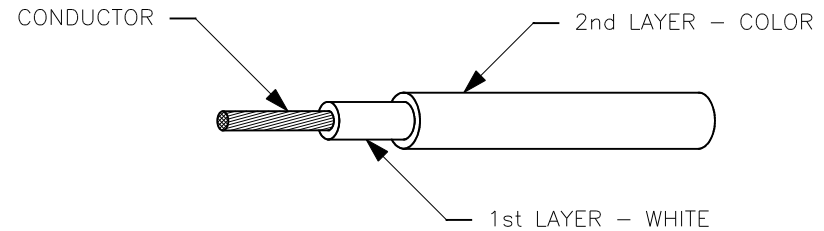

MODEL NUMBER

CT2844-#-XXX

COLOR: 0 - BLACK
 2 - RED
 4 - YELLOW
 5 - GREEN
 6 - BLUE
 9 - WHITE

LENGTH: 10 - 10 m PACKAGE
 50 - 50 m SPOOL
 100 - 100 m SPOOL

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
			APPROVALS	DATE	TITLE			
MATERIAL		DRAWN	WDH	7/11/99	WIRE, TEST LEAD, SILICONE JACKET, 2.50 mm ² , 13 AWG, 36 A			
FINISH		CHECKED			SIZE	CAGE CODE	DWG. NO.	REV.
NEXT ASSY	USED ON	ENGR.			A	43F45	P284400	A
APPLICATION		DESIGN ACTIVITY			SCALE	NONE	SHEET	1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Cal Test](#) manufacturer:

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [1510-24-105](#) [15308](#) [15408](#) [15302](#) [15409](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#)
[2524-A-60](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2524-A-48](#) [2977-J-48](#) [R948131000](#) [380200](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-](#)
[E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [6416](#) [EM3782-24-3#](#) [R948161002](#) [R948160002](#)
[R948170002](#) [R948171002](#) [R948163002](#) [973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3258](#) [CT3158-100](#) [HSPL](#)
[8568/AWG16/200/RT](#) [HSPL 8568/AWG16/200/SW](#) [28.0119-10020](#) [28.0127-05025](#) [28.0127-20025](#) [49.0079-20021](#) [49.0079-20024](#)