

承認書

SPECIFICATION FOR APPROVAL




客戶名稱
CUSTOMER

客戶料號
CUS. P/N

尺寸
DIMENSION **CRHS-11.7x6x19.75-3**

編號
SERIAL NO. **NO. CF1025657199**

日期
DATE **2024年5月6日**

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
		
DATE: 2024/5/6		

承認 CUSTOMER APPROVAL



东莞市灿峰电子有限公司
DONG GUAN CITY CAN FENG ELETRONICS CO., LTD
网址: www.canfengele.com E-mail: canfengdianzi@163.com

联系方式
王小姐: 13556646144
洪先生: 13809826886

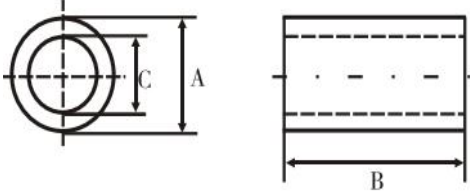
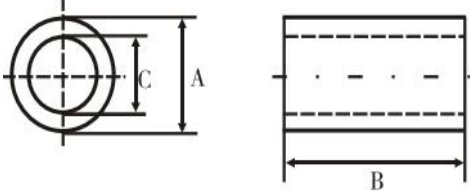
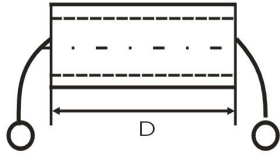



承認書

SPECIFICATION FOR APPROVAL

規格 ITEM	CRHS-11.7x6x19.75-3	編號 SERIAL NO.	NO. CF1025657199
1. 形狀尺寸 (單位mm) ; SHAPE & DIMENSION(unit/mm); 		A	11.70 ± 0.5 mm
		B	6.00 ± 0.4 mm
		C	19.75 ± 0.6 mm
		D	3.00 ± 0.4 mm
		E	
		F	
		G	
		2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;	
<input type="checkbox"/> L		TEST FREQ	測試儀器 TESTING INSTRUMENTS
<input type="checkbox"/> Q		TEST FREQ	KHZ MHZ 1. Q-METER: <input type="checkbox"/> HP-4342A <input type="checkbox"/> MQ-172
<input checked="" type="checkbox"/> Z	Z1=90 Ω MIN 25MHZ	KHZ	Z3= KHZ MHZ 2. LCR-METER: <input type="checkbox"/> TH2826
	Z2=160 Ω MIN 100MHZ	KHZ	Z4= KHZ MHZ 3. IMPEDANCE ANALYZER: <input checked="" type="checkbox"/> HP-4191A <input type="checkbox"/> Agilent 16092A <input type="checkbox"/> TH2826
溫度 TEMP	25±5℃	濕度 HUMIDITY	60±8%
繞線: WINDING	Z: Φ 0.5*100L(mm)*0.5TS		4. L-METER: <input type="checkbox"/> TH-2775B 5. DIGITAL MINI-OHM METER: VP2941A
3. 外觀 THE LIMIT OF BREAKAGE:			
項目 Item		標準值 Standard Value	
一處缺陷的面积 Area of a breakage		≤ 1mm ²	
总缺陷面积 ALL area of the breakage		≤ 2mm ²	
缺陷深度 The depth of the breakage		≤ 0.4mm	
毛刺长度 The length of burr		≤ 0.2mm	
4. 包裝 PACKAGING: 內包裝采用泡塑盒, 外包裝采用紙箱, 每箱產品外面都蓋上标签 (包括品名、數量、批號、檢驗員)。 Inner packing gdopts foam plastics box, outer packing adopts carton and each carton should have a qualified label outside(include the variey, quantity, batch number and inspector).			

檢 測 數 據

INSPECTION DATA

規 格 ITEM	CRHS-11.7x6x19.75-3					編 號 SERIAL NO.	NO. CF1025657199							
1. 形壯尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm): =							<input type="checkbox"/> L							
							<input type="checkbox"/> Q				KHZ MHZ			
							<input checked="" type="checkbox"/> Z		Z1=90 Ω MIN KHZ 25MHZ		Z1= KHZ MHZ			
									Z2=160 Ω MIN KHZ 100MHZ		Z4= KHZ MHZ			
							溫 度 TEMP		25±5°C		濕 度 HUMIDITY		60±8%	
							繞 線: WINDING		Z: Φ 0.5*100L(mm)*0.5TS					
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)							
	Q	L(μH)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F		
			90	160			11.7	6	19.75	3				
+			/	/			0.5	0.4	0.6	0.4				
-			0	0			0.5	0.4	0.6	0.4				
1			121.8	217.0			11.69	6.02	19.79	3.09				
2			120.6	218.6			11.65	6.01	19.81	3.15				
3			121.5	218.2			11.72	6.02	19.77	2.96				
4			119.0	217.4			11.68	6.08	19.85	2.99				
5			121.9	217.9			11.65	6.00	19.73	3.08				
6			119.2	216.4			11.75	6.08	19.69	2.96				
7			120.7	215.4			11.72	6.01	19.85	2.99				
8			122.0	217.5			11.75	6.03	19.85	3.16				
9			123.3	224.0			11.72	6.04	19.73	3.00				
10			137.7	218.7			11.71	6.07	19.75	3.00				
X			122.8	218.1			11.70	6.04	19.78	3.04				
Y/N			Y	Y			Y	Y	Y	Y				
2. 測試儀器 TESTING INSTRUMENTS HP4191A							檢 測 INSPECTION		復 核 CHECK		確 認 APPROVAL			
														

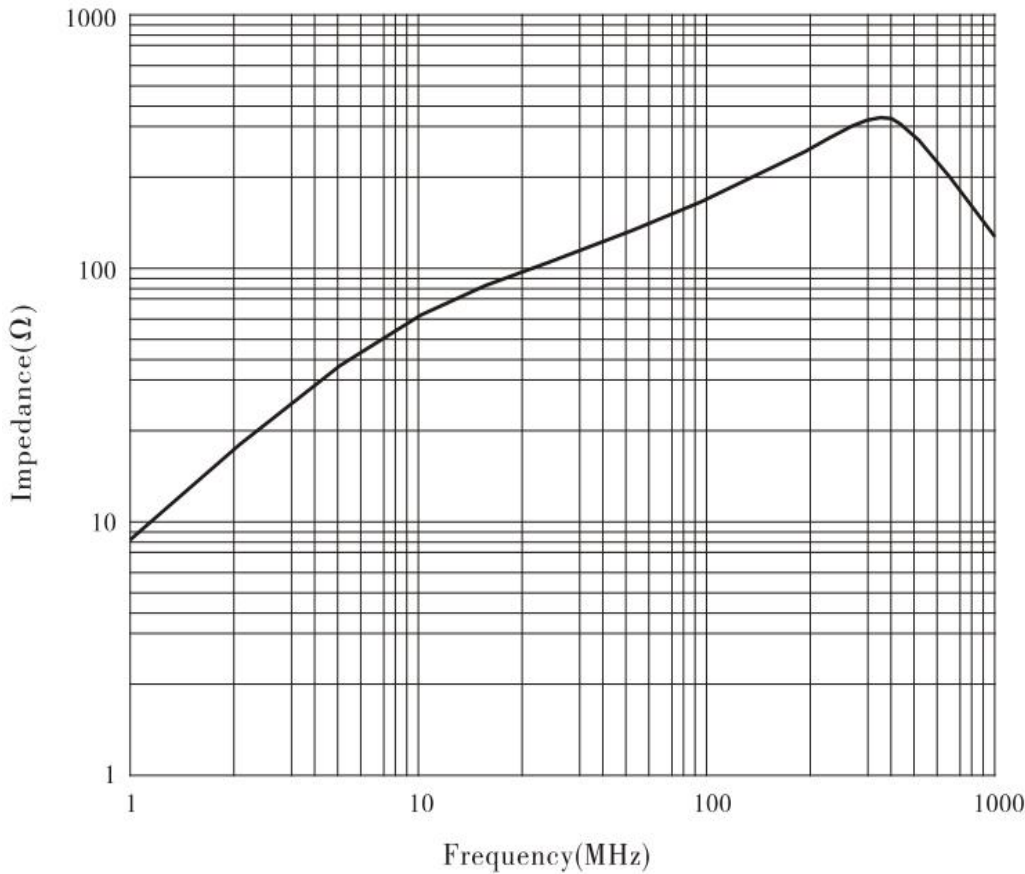
阻抗 - 頻率曲綫




IMPEDANCE V.S.FREQUENCY (Z-Y)

規格 ITEM	CRHS-11.7x6x19.75-3	編號 SERIAL NO.	NO. CF1025657199
------------	---------------------	------------------	------------------

材质特性：
MATERIAL CHARACTERISTICS

材料 牌号 Material	初始磁 导率 Initial Permeability	比损耗因子 Relative Loss Factor	比温度系数 Relative Temperature Coefficient	饱和磁通密度 Saturation Magnetic Flux Density	剩磁 Reman- ence	矫顽力 Coercivi- ty	居里温度 Curie Tempera- ture	电阻率 Electric Resistiv- ity	使用范围 Applied Frequency Range	密度 Densit- y
Unit symbol	μ_i $\pm 20\%$	$\tan \delta / \mu_i$ $\times 10^{-6}$	$\alpha \mu_i \gamma$ $\times 10^{-6}$	Bs (MT)	Br (MT)	HC (A/m)	Tc (°C)	ρ ($\Omega \cdot m$)	F Mhz	d g/cm ³
F2	650	20(0.1MHz)	2-5	330(1600A/m)	150	35	>110	>10 ⁵	0.1-1.5	5



测试条件； TESTING CONDITION;	檢 測 INSPECTION	復 核 CHECK	确 認 APPROVAL
1. 测试仪器： HP 4191 A Testing Equipment:			
2. 测试频率区间： 1MHZ-1000MHZ Testing Frequency Range:			
3. 测试绕组： Φ0.5*100L(mm)*0.5TS Testing Coil Specification:			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [canfeng manufacturer](#):

Other Similar products are found below :

[CD-20x10x10c](#) [CD-50x25x20](#) [CF2-10x4x6](#) [CF2-30x20x10](#) [CF2-32x20x10](#) [CF2-40x25x15](#) [CF2-50x32x20-100](#) [CF2-59*40*20](#) [CF2-80x50x25](#) [CF6N 14.2x28.5x6.35](#) [CFN40-26*9*20.6*17.5-2.6](#) [CFS2-14x8x10x15-4](#) [CFS9-19x6.5x14x12-1.8](#) [CFS9-23.5x6.5x15x19.5-1.4](#) [CFS9-23.5x6.5x19.5x15-1.8](#) [CFS9-23.8x6.3x19.5X15-1.8](#) [CFS9-25x5x21x12-1.4](#) [CFS9-25x5x21x15-1.5](#) [CFS9-28X13X20X11-7.2](#) [CFS9-28x22x12x8-2](#) [CFS9-28x7.7x23x12-2.4](#) [CFS9-29x10x8x22-2.4](#) [CFS9-33.5x12x6.5-1.8](#) [CFS9-33.5x12x6.8-1.8](#) [CFS9-36*9.4*28*14.8-2.0](#) [CFS9-40x6.5x35x12-1.8](#) [CFS9-49.6x6.5x43x12-1.4](#) [CFS9-57.2x6.5x51.6x12-1.2](#) [CFS9-57.2x6.5x51.6x18-1.2](#) [CFS9-7.5x5.5x5.3x11.5-3.3](#) [CN65-40.5x15x27.4](#) [CNF-100](#) [CNF-130A](#) [CNF-50A](#) [CNF-65](#) [CRH10*20*6.5](#) [CRH-10.4x10.4x5.8](#) [CRH-10.5*12.5*7.2](#) [CRH-10.5x15x5.5](#) [CRH-10.5x20x5.5](#) [CRH-10.5X20X6.5](#) [CRH-10.5x20x7.3](#) [CRH-10x14x6](#) [CRH-10x20x5.5](#) [CRH-11.5x25x5](#) [CRH-12.5x20x8](#) [CRH-12x15x6.5](#) [CRH-12x15x7.2](#) [CRH-12x16x8](#) [CRH12x20x5.6](#)