

Panel Meters and Controllers

Autoranging Frequency Meter

Type DI3-72 F1K




- 3-dgt μ P-based frequency indicator
- 1.0 to 999 Hz
- Autoranging capability
- 72 x 72 mm
- Degree of protection (front): IP 50 (IP 65 on request)

Product Description

3-dgt μ P-based frequency meter with autoranging capability. The housing is for panel mounting and ensures a degree of protection (front) of IP 50 (IP 65 on request).

Ordering Key

DI3-72F1KAD0XX

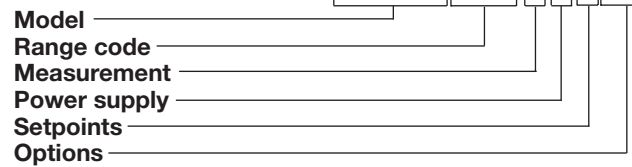

Type Selection

Power supply	Options
A: 24 VAC, -15% +10%, 50/60 Hz ¹⁾	XX: None (standard)
B: 48 VAC, -15% +10%, 50/60 Hz ¹⁾	EX: Degree of protection IP 65
C: 115 VAC, -15% +10%, 50/60 Hz ¹⁾	
D: 230 VAC, -15% +10%, 50/60 Hz (standard)	¹⁾ Power supply on request

Supply Specifications

AC supply	230 VAC, -15% +10%, 50/60 Hz (standard) 24 VAC, 48 VAC, 115 VAC, -15% +10%, 50/60 Hz (on request)
Power consumption	3.2 VA

Input Specifications

Rated input	500 VAC, 1 to 1000 Hz, autoranging
Overload protection Continuous For 1 s	1.2 x rated input 2 x rated input
Accuracy (@ 25°C \pm 5°C, R.H. \leq 60%)	\pm 0.1% f.s., \pm 1 dgt
Temperature drift	\pm 100 ppm/°C
Display	7-segment LED, h 14.2 mm, 3 digits
Sampling rate	1 time/s
Indication Max. Min. Over range	999 0.00 EEE
Input voltage	9 to 500 VAC
Input impedance	500 k Ω

General Specifications


Operating temperature	0 to 50°C (32 to 122°F) (R.H. < 90% non-condensing)
Storage temperature	-10 to 60°C (14 to 140°F) (R.H. < 90% non-condensing)
Insulation reference voltage	300 V _{rms} to ground
Dielectric strength	4000 V _{rms} for 1 minute
Noise rejection CMRR	100 dB, 40 to 60 Hz
EMC	IEC 60801-2, IEC 60801-3, IEC 60801-4 (level 2), EN 50 081-1, EN 50 082-1
Safety standards	EN 61010-1, IEC 61010-1, VDE 0411
Connector	Screw-type
Housing Dimensions Material	72 x 72 x 75 mm ABS, self-extinguishing: UL 94 V-0
Degree of protection	Front: IP 50 (IP 65 on request)
Weight	250 g approx.
Approvals	CE, CSA

Range Table


Measurement	Dec. point position	Resolution
1.00 to 9.99 Hz	9.99	0.01 Hz
10.0 to 99.9 Hz	99.9	0.1 Hz
100 to 999 Hz	999	1 Hz

(Automatic selection)

Wiring Diagram

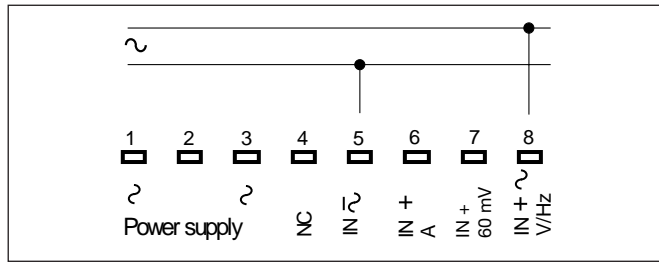

Front Panel Description

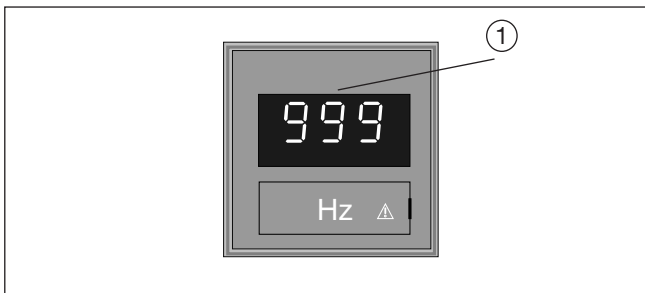


1. Display

3-dgt (maximum read-out 999).

Alphanumeric indication by means of 7-segment display for:

- Displaying of the measured value, over-range.

Dimensions (mm)

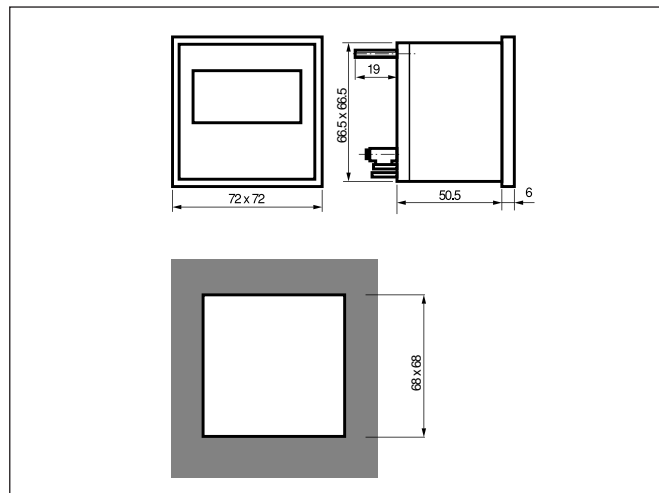

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Panel Meters](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[M00558-00](#) [01.098.1658.1](#) [70.360.4828.0](#) [72331-00](#) [85310-25](#) [86642-00](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#) [EM11DINAV81XR1X](#) [25.325.3253.1](#) [25.325.4253.1](#) [25.330.0453.1](#) [20046-20](#) [20182-23](#) [AP1021](#) [25.320.5053.0](#)
[25.350.3453.1](#) [25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [04.630.1080.0](#) [20078-20](#) [EM11DINAV81XO1X](#) [85874-26](#) [87166-00](#) [87895-00](#)
[28000-03](#) [K3GN-NDT1-FLK 24VDC](#) [82322K-11](#) [86641-00](#) [87004-00](#) [HB8280R2490](#) [HB8260R4890](#) [SCE016MD3MV0W10](#) [20125-21](#)
[86640-00](#) [PG-100-103GP](#) [PG-100-102RP](#) [PG-100B-102R-H](#) [PG-100B-103R](#) [PG-100B-102R](#) [PG-100N-103R-W](#) [PG-100N-103R](#) [PG-100N-102R](#) [PG-100-102GH](#) [PG-100-103RP](#)