


Proximity Sensors Inductive Extended Range, Nickel Plated Brass Housing Types IA, DC, M12, M18 and M30, 2-wire

CARLO GAVAZZI



- Sensing distance: 4 to 22 mm
- Flush and non-flush types
- Power supply: 10 to 40 VDC
- Output: Transistor
- Make or break switching
- Protection: Reverse polarity, short-circuit and transients
- 2 m cable or plug M12
- Diameter: M12, M18, M30

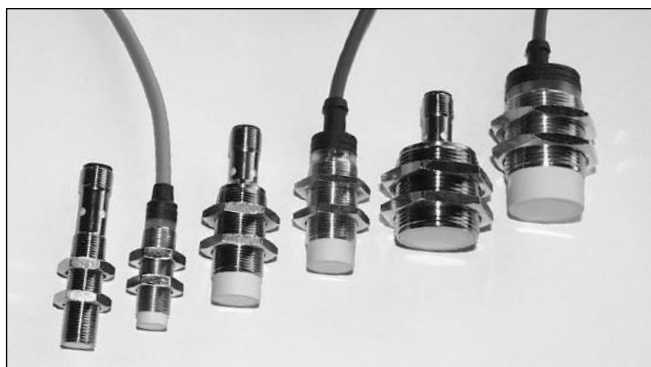

Product Description

Proximity switch M12, M18 and M30 in nickel-plated brass housings. Made in accordance with Euronorm EN 60 947-5-2.

Ordering Key

IA12ASF04DOM1

Cap. proximity switch	_____
Housing style	_____
Housing size	_____
Housing material	_____
Housing length	_____
Detection principle	_____
Sensing distance	_____
Output type	_____
Output configuration	_____
Connection	_____

Type Selection

Housing diameter	Body style	Connection	Rated operating dist. (S _n)	Ordering no. 2 wire DC Normally open	Ordering no. 2 wire DC Normally closed
M12	Short	Cable	4 mm ¹⁾	IA 12 DSF 04 DO	IA 12 DSF 04 DC
M12	Short	Plug	4 mm ¹⁾	IA 12 ASF 04 DO M1	IA 12 ASF 04 DC M1
M12	Short	Cable	8 mm ²⁾	IA 12 DSN 08 DO	IA 12 DSN 08 DC
M12	Short	Plug	8 mm ²⁾	IA 12 ASN 08 DO M1	IA 12 ASN 08 DC M1
M18	Short	Cable	8 mm ¹⁾	IA 18 DSF 08 DO	IA 18 DSF 08 DC
M18	Short	Plug	8 mm ¹⁾	IA 18 ASF 08 DO M1	IA 18 ASF 08 DC M1
M18	Short	Cable	14 mm ²⁾	IA 18 DSN 14 DO	IA 18 DSN 14 DC
M18	Short	Plug	14 mm ²⁾	IA 18 ASN 14 DO M1	IA 18 ASN 14 DC M1
M30	Short	Cable	15 mm ¹⁾	IA 30 DSF 15 DO	IA 30 DSF 15 DC
M30	Short	Plug	15 mm ¹⁾	IA 30 ASF 15 DO M1	IA 30 ASF 15 DC M1
M30	Short	Cable	22 mm ²⁾	IA 30 DSN 22 DO	IA 30 DSN 22 DC
M30	Short	Plug	22 mm ²⁾	IA 30 ASN 22 DO M1	IA 30 ASN 22 DC M1

¹⁾ For flush mounting in metal

²⁾ For non-flush mounting in metal

Specifications

Rated operational volt. (U _e) (U _B)	12 to 36 VDC 10 to 40 VDC (ripple included)	Transient voltage	≤ 1 kV/0.5 J
Ripple	≤ 10%	EMC	Approved according to EN 50 080, EN 50 081
Rated operational current (I _e) Continuous	≤ 5-100 mA	Power ON delay	< 50 ms
No-load supply current (I)	≤ 0.8 mA	Frequency of operating cycles (f)	IA12xSF 1000 Hz IA12xSN 800 Hz IA18xSF 500 Hz IA18xSN 400 Hz IA30xSF 400 Hz IA30xSN 200 Hz
Voltage drop (U _d)	≤ 3 VDC at max. load		
Protection	Reverse polarity, short-circuit, transients		





Specifications (cont.)



Indication	LED, yellow	Connection	
Repeat accuracy (R)	≤ 10%	Cable	2 m, 2 x 0.5 mm ² , grey PVC, oil proof
Hysteresis (H) (Differential travel)	1 to 20% of sensing distance	Plug	M12 x 1
Assured operating dist. (S_a)	0 ≤ S _a ≤ 0.77 S _n	Cables for plug (-1)	CONH1A serie
Effective operating dist. (S_r)	0.9 x S _n ≤ S _r ≤ 1.1 x S _n	Weight (cable excluded)	IA 12xxx 20 g
Usable operating dist. (S)	0.85 x S _r ≤ S _u ≤ 1.15 x S _r	IA 18xxF 26 g	IA 18xxN 30 g
Ambient temperature		IA 30xxF 50 g	IA 30xxN 80 g
Operating	-25° to +70°C (-13° to +158°F)	Tightening torque	IA 12 (x) 7 Nm
Storage	-30° to +80°C (-22° to +176°F)		15 Nm
Degree of protection	IP 67 (Nema 1, 3, 4, 6, 13)		IA 18 27.5 Nm
Housing material			IA 30 50 Nm
Body	In nickel-plated brass	Approvals	CSA, UL
Front	Grey thermoplastic polyester	CE-marking	Yes
Back	Black polyester (cable)		
	In nickel-plated brass (plug)		

Dimensions

Type	A	B Ø mm	C mm	D mm	E mm	F mm	SW mm
IA 12 DSF 04 D.	M 12 x 1 x 38	10.7	38	11	5.0	4	17
IA 12 ASF 04 D. M1	M 12 x 1 x 38	10.7	38	25.2		4	17
IA 12 DSN 08 D.	M 12 x 1 x 38	10.7	42	11	5.0	4	17
IA 12 ASN 08 D. M1	M 12 x 1 x 38	10.7	42	25.2		4	17
IA 18 DSF 08 D.	M 18 x 1 x 30	16.7	30	11.6	15.4	4	24
IA 18 ASF 08 D. M1	M 18 x 1 x 30	16.7	30	25.0		4	24
IA 18 DSN 14 D.	M 18 x 1 x 30	16.7	38	11.6	15.4	4	24
IA 18 ASN 14 D. M1	M 18 x 1 x 30	16.7	38	25.0		4	24
IA 30 DSF 15 D.	M 30 x 1.5 x 30	28	30	13.6	15.4	5	36
IA 30 ASF 15 D. M1	M 30 x 1.5 x 30	28	30	25.0		5	36
IA 30 DSN 22 D.	M 30 x 1.5 x 30	28	42	13.6	15.4	5	36
IA 30 ASN 22 D. M1	M 30 x 1.5 x 30	28	42	25.0		5	36

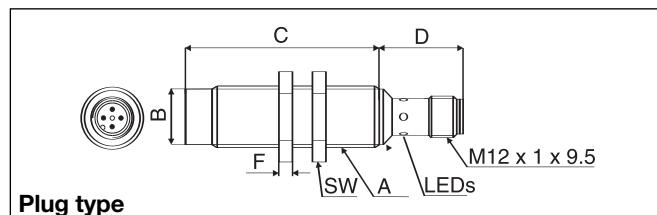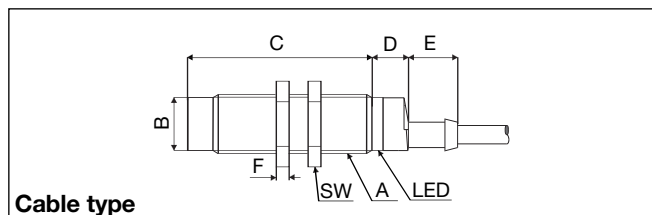





Wiring Diagrams

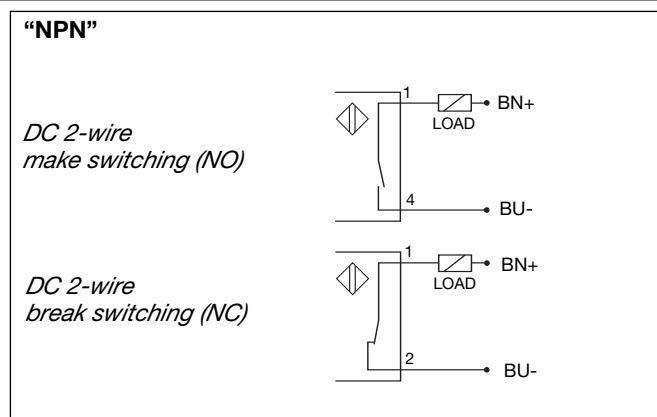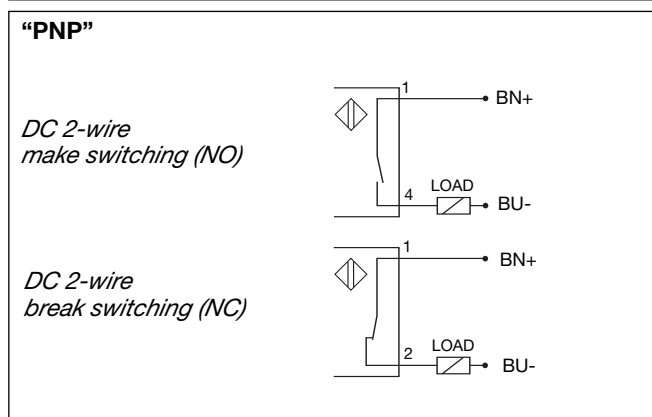

Power Supplies

Power supplies VDC: > SS 130/140.

Installation Hints
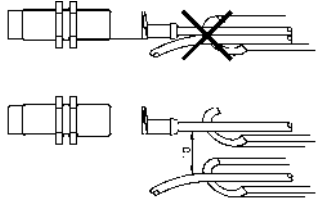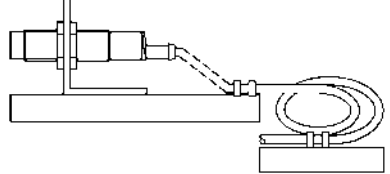
<p><i>To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables</i></p> 	<p><i>Relief of cable strain</i></p>  <p>The cable should not be pulled</p>	<p><i>Protection of the sensing face</i></p>  <p>A proximity switch should not serve as mechanical stop</p>	<p><i>Switch mounted on mobile carrier</i></p>  <p>Any repetitive flexing of the cable should be avoided</p>
--	--	---	---

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [8027AL20NL2CPXX](#) [FYCC8E1-2](#)
[9221350022](#) [922AA2W-A9P-L](#) [PLS2](#) [GL-12F-C2.5X10\(LOT3\)](#) [972AB2XM-A3N-L](#) [972AB3XM-A3P-L](#) [PS3251](#) [980659-1](#) [QT-12](#) [E2E2-](#)
[X5M41-M4](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2EX3D1SM1N](#) [E2E-X4MD1-G](#) [E2E-X5E1-5M-N](#) [E2E-X5Y2-N](#) [E2E-X7D1-](#)
[M1J-T-0.3M-N](#) [E2FMX1R5D12M](#) [E2K-F10MC1](#) [5M](#) [EH-302](#) [EI3010TBOP](#) [EI5515NPAP](#) [MS605AU](#) [EP175-32000](#) [BSA-08-25-08](#)
[IFRM04N35B1/L](#) [IFRM04P1513/S35L](#) [IFRM06P1703/S35L](#) [IFRM08P1501/S35L](#) [IFRM12N17G3/L](#) [IFRM12P17G3/L](#) [IFRM12P3502/L](#)
[IFRM12P37G1/S14L](#) [ILFK12E9189/I02](#) [ILFK12E9193/I02](#) [IMM2582C](#) [OISN-013](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#)