


# PCB TERMINAL BLOCKS

## 5.08mm Pitch Pluggable Rising Clamp Terminal with Screw Flanges

- 2-22 pole solid block
- Pluggable male-female connectors
- Screw Flanges
- Horizontal female plug style
- Polarised mouldings
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 0.2 to 4mm<sup>2</sup> (24 to 12 AWG)
- Anti solder wicking
- Captive screws
- Guided pin alignment
- CE and  approved

### SPECIFICATION


Rating	16A/380V UL=300V, VDE=380V
Dielectric strength	2kV
Insulation resistance	>2MΩ
Working temperature	-40°C to 105°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Tinned phosphor bronze
Rising clamp	Nickel copper flash brass
Screw/torque	M3 steel zinc plated, 0.5Nm
Recommended PCB hole size	ø1.5mm

### Female connector

TYPE NO.	POLES	LENGTH
CTB9208/2FL	2	20mm
CTB9208/3FL	3	25mm
CTB9208/4FL	4	30mm
CTB9208/5FL	5	35mm
CTB9208/6FL	6	40mm
CTB9208/7FL	7	45mm
CTB9208/8FL	8	50mm
CTB9208/9FL	9	55mm
CTB9208/10FL	10	60mm
CTB9208/11FL	11	65mm
CTB9208/12FL	12	70mm
CTB9208/13FL	13	75mm

TYPE NO.	POLES	LENGTH
CTB9208/14FL	14	80mm
CTB9208/15FL	15	85mm
CTB9208/16FL	16	90mm
CTB9208/17FL	17	95mm
CTB9208/18FL	18	100mm
CTB9208/19FL	19	105mm
CTB9208/20FL	20	110mm
CTB9208/21FL	21	115mm
CTB9208/22FL	22	120mm

CTB9208/ FL


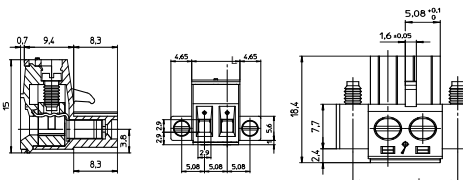


### PCB mounting male vertical

TYPE NO.	POLES	LENGTH
CTB9308/2FL	2	20mm
CTB9308/3FL	3	25mm
CTB9308/4FL	4	30mm
CTB9308/5FL	5	35mm
CTB9308/6FL	6	40mm
CTB9308/7FL	7	45mm
CTB9308/8FL	8	50mm
CTB9308/9FL	9	55mm
CTB9308/10FL	10	60mm
CTB9308/11FL	11	65mm
CTB9308/12FL	12	70mm
CTB9308/13FL	13	75mm

TYPE NO.	POLES	LENGTH
CTB9308/14FL	14	80mm
CTB9308/15FL	15	85mm
CTB9308/16FL	16	90mm
CTB9308/17FL	17	95mm
CTB9308/18FL	18	100mm
CTB9308/19FL	19	105mm
CTB9308/20FL	20	110mm
CTB9308/21FL	21	115mm
CTB9308/22FL	22	120mm

CTB9308/ FL

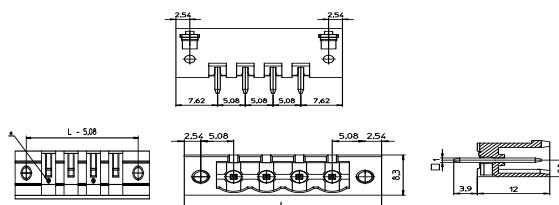


### PCB mounting male horizontal

TYPE NO.	POLES	LENGTH
CTB9358/2FL	2	20mm
CTB9358/3FL	3	25mm
CTB9358/4FL	4	30mm
CTB9358/5FL	5	35mm
CTB9358/6FL	6	40mm
CTB9358/7FL	7	45mm
CTB9358/8FL	8	50mm
CTB9358/9FL	9	55mm
CTB9358/10FL	10	60mm
CTB9358/11FL	11	65mm
CTB9358/12FL	12	70mm
CTB9358/13FL	13	75mm

TYPE NO.	POLES	LENGTH
CTB9358/14FL	14	80mm
CTB9358/15FL	15	85mm
CTB9358/16FL	16	90mm
CTB9358/17FL	17	95mm
CTB9358/18FL	18	100mm
CTB9358/19FL	19	105mm
CTB9358/20FL	20	110mm
CTB9358/21FL	21	115mm
CTB9358/22FL	22	120mm

CTB9358/ FL

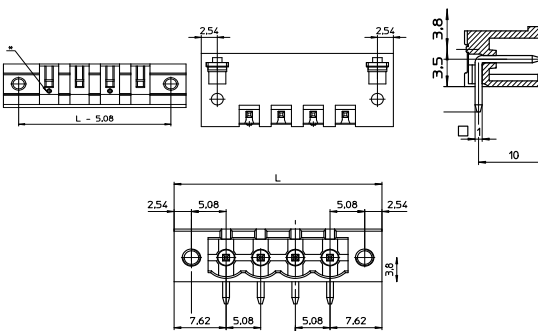

PCB  
TERMINAL  
BLOCKS

INTER-  
CONNECTION

FUSES &  
FUSE-  
HOLDERS

LEDs &  
INDICATORS

MINIATURE  
SWITCHES

LIMIT &  
SAFETY  
SWITCHES

CONTROL  
PRODUCTS

INTERFACE  
MODULES &  
SUPPORTS

RELAY  
BASES

ENCLOSURES

BATTERIES

TRANS-  
FORMERS