



CFM500S SERIES 500 WATT AC-DC POWER SUPPLY WITH PFC

Features

- Universal Input Range 80~264V_{ac}
- High Efficiency up to 94.5%
- 3"x 5" Compact Size
- Class I
- No Load Power Consumption<0.5W
- Approval IEC/EN/UL 62368-1
- Approval EN 55032, 47 CFR FCC Part 15
- Active PFC Meets EN 61000-3-2
- Meets IEC/EN 60335-1
- High Power Density up to 21.64W/Inch³
- 390W Natural, 470 ~ 500W Conduction Convection
- Over Temperature Protection
- PS On/Off Remote Control
- Power Good & Power Fail Signal
- +5V Stand-by, 12V Fan Output
- Low Inrush Current



MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT			VOLTAGE ACCURACY	RIPPLE & NOISE	VOLTAGE ADJ. RANGE	LINE REGULATION	LOAD REGULATION	%EFF. (Typ.)			
		NOTE1		NOTE2							NOTE3	NOTE4	NOTE5
		With FAN	Without FAN										
			COVER	OPEN									
CFM500S120	12 V	41.67A	27.5A	25A	±1%	120mV	11.4~12.6 V	±0.5%	±1%	92.5%			
CFM500S180	18 V	27.78A	18.33A	16.67A	±1%	150mV	17.1~18.9 V	±0.5%	±1%	93.5%			
CFM500S240	24 V	20.83A	17.08A	15.83A	±1%	150mV	22.8~25.2 V	±0.5%	±1%	94.5%			
CFM500S360	36 V	13.89A	11.39A	10.56A	±1%	200mV	34.2~37.8 V	±0.5%	±1%	94.5%			
CFM500S480	48 V	10.42A	8.54A	7.92A	±1%	250mV	45.6~50.4 V	±0.5%	±1%	94.5%			
Stand-by Output Voltage													
All	+5V	1A			±3%	100mV	---	±1%	±5%	---			
Fan Output Voltage													
All	+12V	0.5A (NOTE 6)			---	---	---	---	---	---			

Note:

1. Forced air convection with 21CFM Fan.
2. Voltage accuracy is set at 100% full load and 25°C Ta.
3. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
4. Line regulation is measured from high line to low line with 100% full load.
5. Load regulation is measured from 10% to 100% full load.
6. Fan output can only operate normal when the stand-by output is above 0.5A.

PART NUMBER

Series	Number of Outputs	Nominal Output Voltage	Type	Output Terminal
CFM500	X	XXX	X (Option)	-X(Option)
CFM500	S : Single	120 : 12V 180 : 18V 240 : 24V 360 : 36V 480 : 48V	None : With Baseplate C : With Cover	None : Vertical R : Horizontal

Part Number Example:

- CFM500S120:** With Baseplate, 500W, 12Vdc Output, Vertical Type Terminal
- CFM500S120C:** With Cover, 500W, 12Vdc Output, Vertical Type Terminal
- CFM500S120-R:** With Baseplate, 500W, 12Vdc Output, Horizontal Type Terminal
- CFM500S120C-R:** With Cover, 500W, 12Vdc Output, Horizontal Type Terminal



CFM500S Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	80		264	V _{ac}
Operating Case Temperature	See Derating Curve	All	-40		85	°C
Storage Temperature		All	-40		85	°C
Operating Altitude		All			5000	m

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range		All	100		240	V _{ac}
Input Frequency Range		All	47		63	Hz
Maximum Input Current	100% Full Load, V _{in} =100V _{ac}	All			6	A
Power Factor	V _{in} =230V _{ac}	All		0.97		
Leakage Current		All			0.3	mA
Inrush Current	V _{in} =240V _{ac} , Cold start at 25°C	All		8.5		A

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	V _{in} =Nominal V _{in} , I _o =I _o max., T _c =25°C.	CFM500S120	11.88	12	12.12	V _{dc}
		CFM500S180	17.82	18	18.18	
		CFM500S240	23.76	24	24.24	
		CFM500S360	35.64	36	36.36	
		CFM500S480	47.52	48	48.48	
Operating Output Current Range	V _{in} =80V _{ac} ~264V _{ac} , See Derating Curve	CFM500S120			41.67	A
		CFM500S180			27.78	
		CFM500S240			20.83	
		CFM500S360			13.89	
		CFM500S480			10.42	
Holdup Time	V _{in} =115V _{ac}	All		16		ms
Output Voltage Regulation						
Load Regulation	10% to 100% full load	All			±1.0	%
Line Regulation	V _{in} =High line to low line	All			±0.5	%
Over Voltage Protection	Latch off (AC recycle to reset)	CFM500S120			16	V _{dc}
		CFM500S180			30	
		CFM500S240			35	
		CFM500S360			50	
		CFM500S480			63	
Over Current Protection	Auto recovery	All	120		190	%
Short Circuit Protection	Auto recovery	All				
Over Temperature Protection	Auto recovery	All				
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz bandwidth 3. Ambient temperature=25°C	CFM500S120			120	mV
		CFM500S180			150	
		CFM500S240			150	
		CFM500S360			200	
		CFM500S480			250	



CFM500S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Load Capacitance	1. $V_{in}=115V_{ac}$ and $230V_{ac}$ 2. Output is 100% full load 3. Ambient temperature= $25^{\circ}C$	CFM500S120			42900	uF
		CFM500S180			28600	
		CFM500S240			20800	
		CFM500S360			14000	
		CFM500S480			10800	
Efficiency	1. $V_{in}=230V_{ac}$ 2. Output is 100% full load 3. Ambient temperature= $25^{\circ}C$	CFM500S120		92.5		%
		CFM500S180		93.5		
		CFM500S240		94.5		
		CFM500S360		94.5		
		CFM500S480		94.5		
PS-On Signal	Power on	All	0		2	V_{dc}
	Power off (PS-ON and GND open)			4		
PS-On Signal	Power on (PS-ON and GND short)	All		10		mA
	Power-off (PS-ON and GND open)			0		
Power Good (PG)	1. $V_{in}=80V_{ac}\sim 264V_{ac}$ 2. Output is 100% full load 3. The TTL goes high after power set up	All	100		500	ms
Power Fail (PF)	1. $V_{in}=80V_{ac}\sim 264V_{ac}$ 2. Output is 100% full load 3. The TTL goes low before V_o below 90% rated value	All	1	10		ms

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 minute	All			4000	V_{ac}
Isolation Resistance	Input to output	All	100			M Ω

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	$P_{out}=\max.$ rated power	All		65		kHz
Output Voltage adjustment		All	-5		+5	%

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$; $T_a=25^{\circ}C$ per MIL-HDBK-217F	All		200		k hours
Humidity	Non-condensing	All			93	% RH
Shock	Meet MIL-STD-810F Table 516.5, Table 516.5-1 10ms, each axis 3 times($\pm X$ 、 $\pm Y$ 、 $\pm Z$ axis)	All		75		g
Vibration	Meet MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X、Y、Z axis, 1 hour (each axis),. Total 3 hrs.	All		4		g
Weight	Baseplate versions	All		515		g
	Covered versions			635		
Dimensions	With baseplate	All	5.000x3.000x1.540 Inches (127.00x76.20x39.10 mm)			
	C (with cover)		5.354x3.425x1.673 Inches (136.00x87.00x42.50 mm)			
Safety	Class I, IEC 62368-1:2014, EN 62368-1:2014/A11:2017, UL 62368-1				Ed 2.0	
EMC Emission	EN 55032:2015+AC:2016, EN 61000-6-3 2007+A1: 2011+AC: 2012, Class B EN 61000-6-4:2007+A1:2011, 47 CFR FCC Part 15 Subpart B (Class B) EN 61204-3:2000, EN 61000-3-2:2014, EN 61000-3-3:2013					
Conducted Disturbance	EN 55032:2015+AC:2016, EN 61000-6-3 2007+A1: 2011+AC: 2012, Class B EN 61000-6-4:2007+A1:2011, 47 CFR FCC Part 15 Subpart B (Class B)				Class B	
Radiated Disturbance	EN 55032:2015+AC:2016, EN 61000-6-3 2007+A1: 2011+AC: 2012, Class B EN 61000-6-4:2007+A1:2011, 47 CFR FCC Part 15 Subpart B (Class B)				Class B	
Harmonic Current Emissions	IEC 61000-3-2:2014				Class A, C, D	



CFM500S Series

GENERAL SPECIFICATIONS


Voltage Fluctuations & Flicker	IEC 61000-3-3:2013	
EMC Immunity	EN 55035:2017, EN61000-6-1:2019+CRGD:2018, EN 61000-6-2:2019 EN 61204-3:2000, IEC 61000-4-2,3,4,5,6,8,11	Ed 4.0
Electrostatic Discharge (ESD)	IEC 61000-4-2:2008, Air Discharge: $\pm 8\text{kV}$, Contact Discharge: $\pm 4\text{kV}$	Criterion A
Radio-Frequency, Continuous Radiated Disturbance	IEC 61000-4-3:2006+A1:2007+A2:2010	Criterion A
Electrical Fast Transient (EFT)	IEC 61000-4-4:2012, $\pm 1\text{kV}$, $\pm 2\text{kV}$	Criterion A
Surge	IEC 61000-4-5:2014+A1:2017, L-N: $\pm 0.5\text{kV}$, $\pm 1\text{kV}$, L-E(Ground): $\pm 0.5\text{kV}$, $\pm 1\text{kV}$, $\pm 2\text{kV}$	Criterion A
Conducted Disturbances, Induced by RF Fields	IEC 61000-4-6:2013+COR1:2015	Criterion A
Power Frequency Magnetic Field	IEC 61000-4-8:2009	Criterion A
Voltage Dips	IEC 61000-4-11:2004+A1:2017, Dip: 30% Reduction, Dip >95% Reduction	Criterion A
Voltage Interruptions	IEC 61000-4-11:2004+A1:2017, >95% Reduction	Criterion B
Application Note Link	CFM500S Series App Notes	

CHARACTERISTIC CURVE

Power Derating Curve


Forced Air Flow

Output power & Input voltage

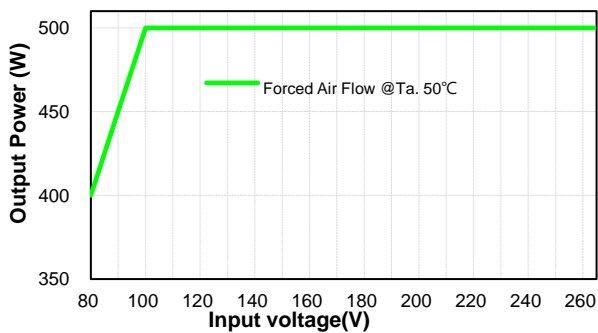


Forced Air Flow

Output power vs Ambient Temperature

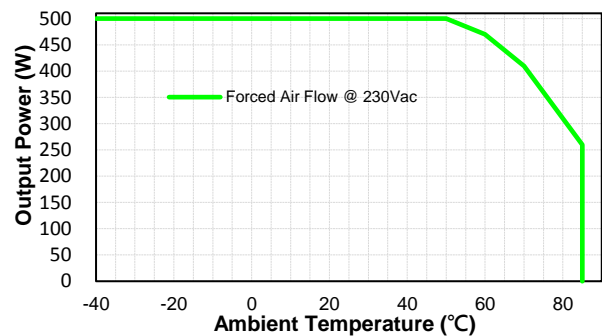


Natural Convection

Output power & Input Voltage

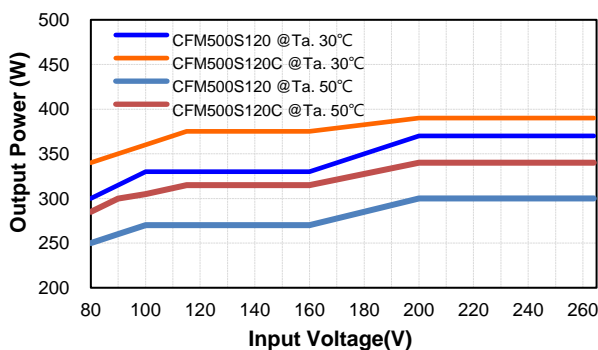

Natural Convection


Output power vs Ambient Temperature

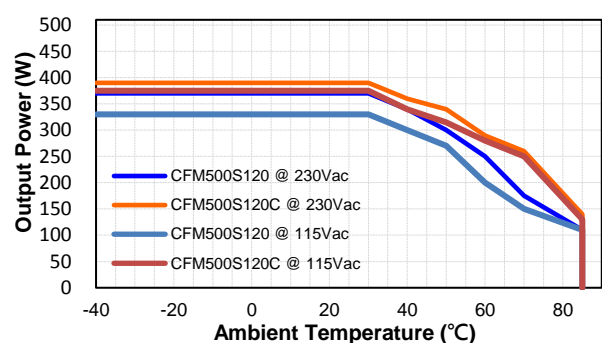




CFM500S Series


Output power & Input Voltage

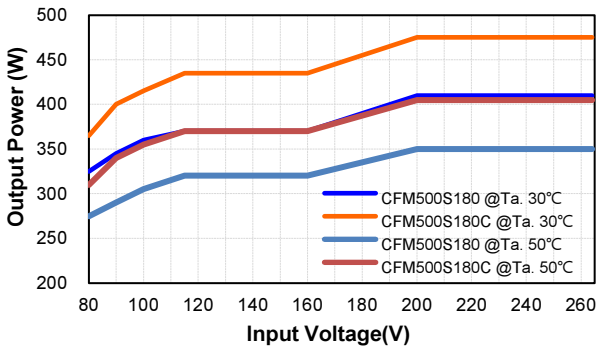


Output power vs Ambient Temperature

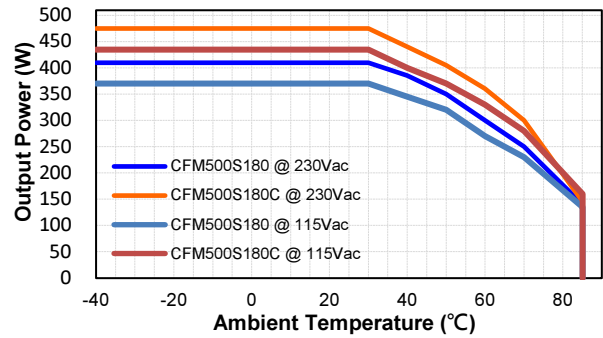


Output power & Input Voltage

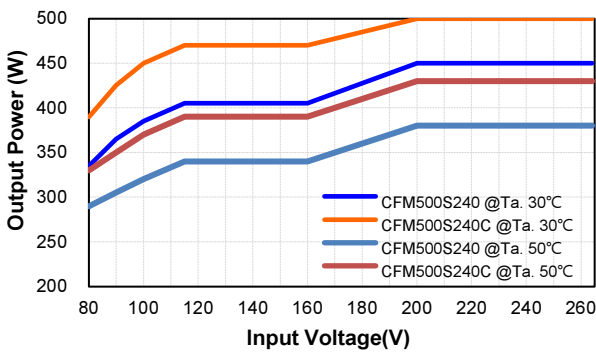


Output power vs Ambient Temperature

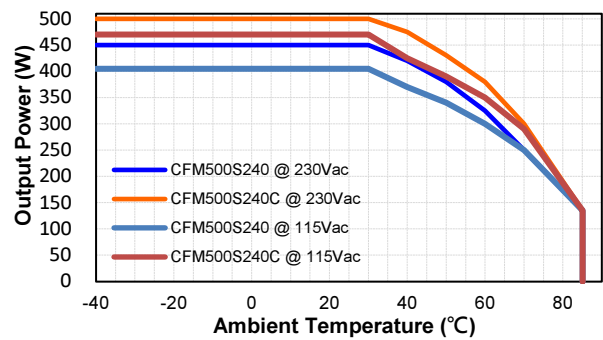


Output power & Input Voltage

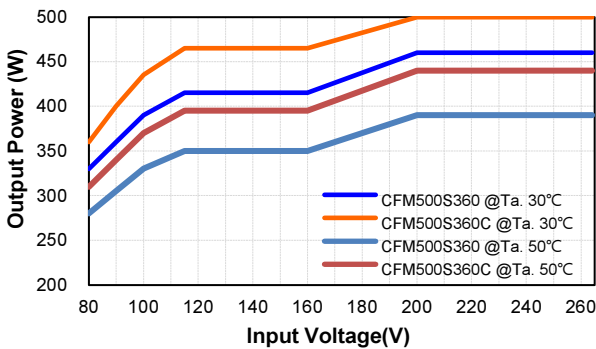


Output power vs Ambient Temperature

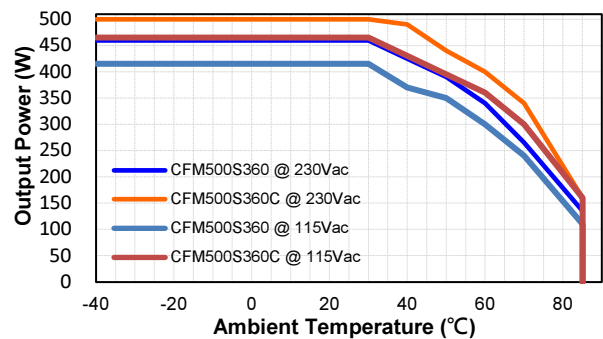

Output power & Input Voltage

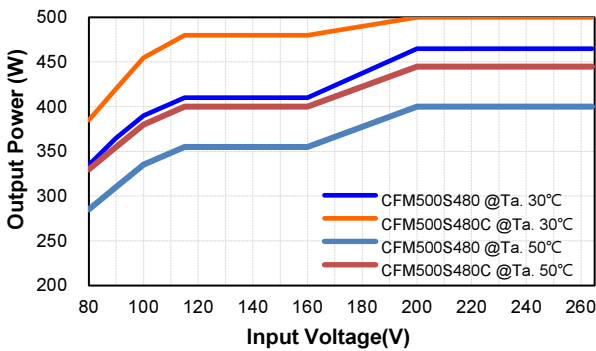

Output power vs Ambient Temperature

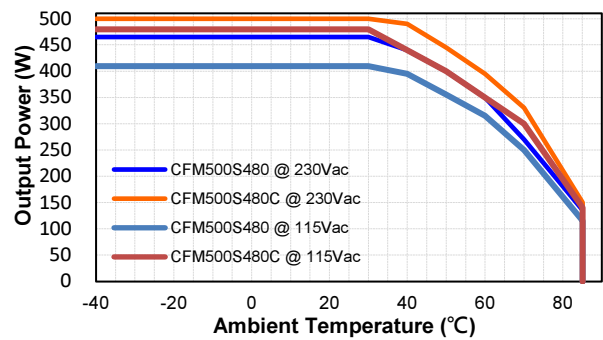




**Conduction Convection with External Baseplate
(48x24.8x0.12cm)**


CFM500S Series

**Conduction Convection with External Baseplate
(48x24.8x0.12cm)**


Output power & Input Voltage

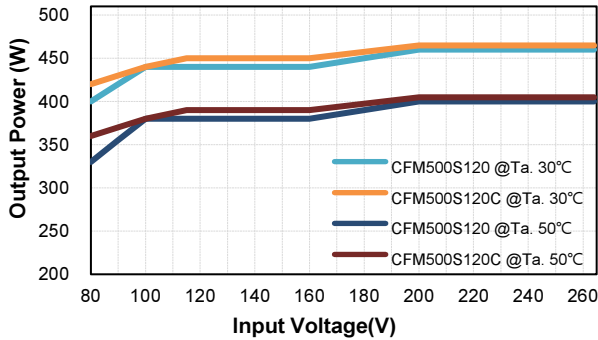


Output power vs Ambient Temperature

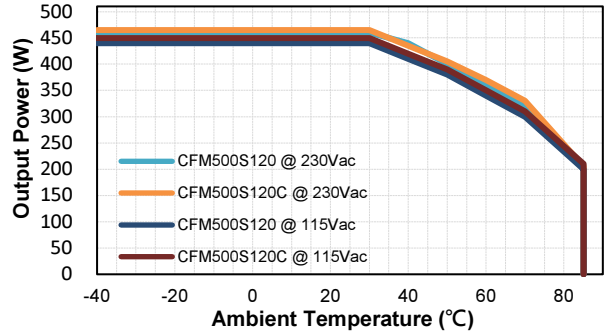


Output power & Input Voltage

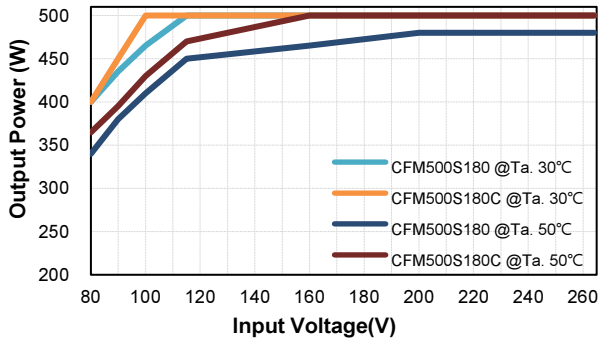


Output power vs Ambient Temperature

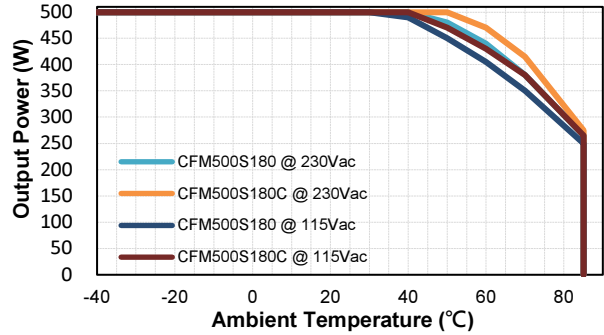


Output power & Input Voltage

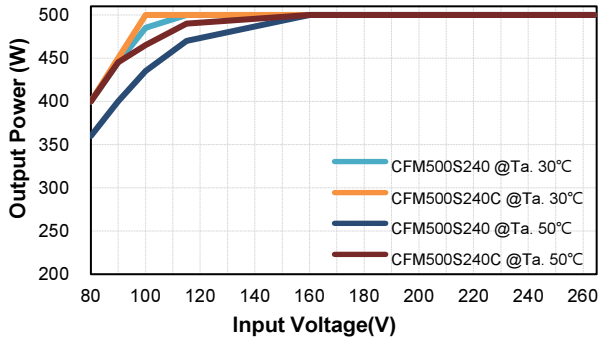


Output power vs Ambient Temperature

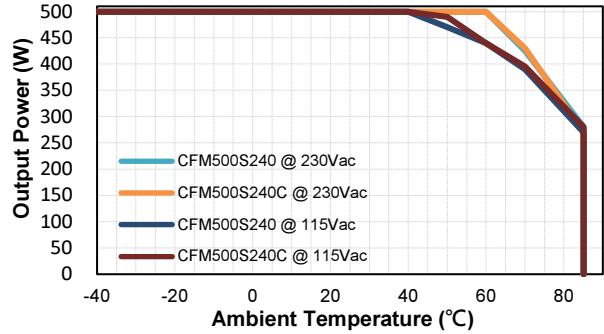

Output power & Input Voltage

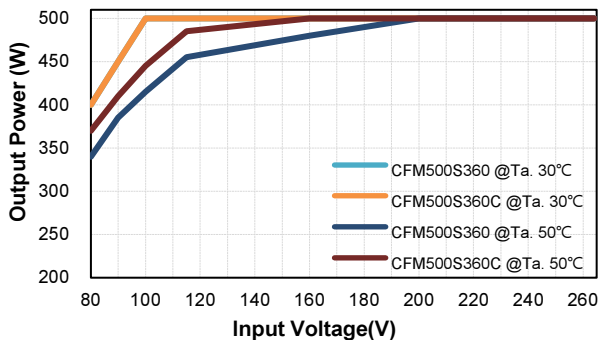


Output power vs Ambient Temperature

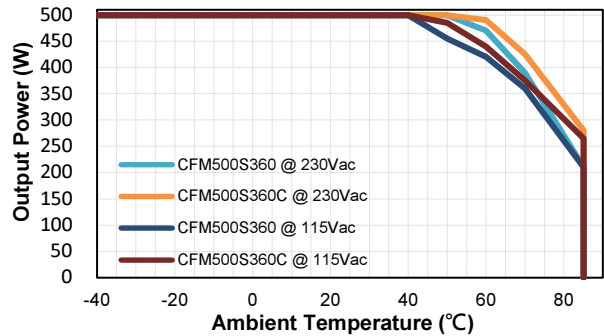




CFM500S Series

Output power & Input Voltage

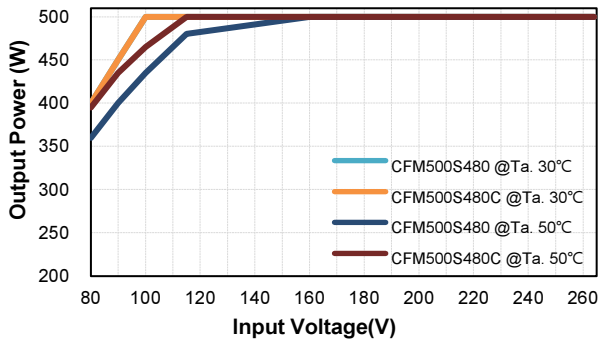


Output power vs Ambient Temperature

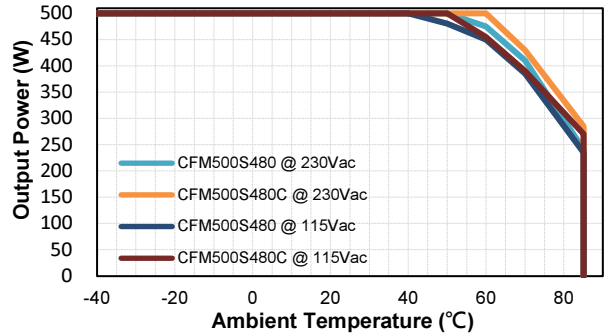


Performance Data


CFM500S120 (Eff Vs Io)

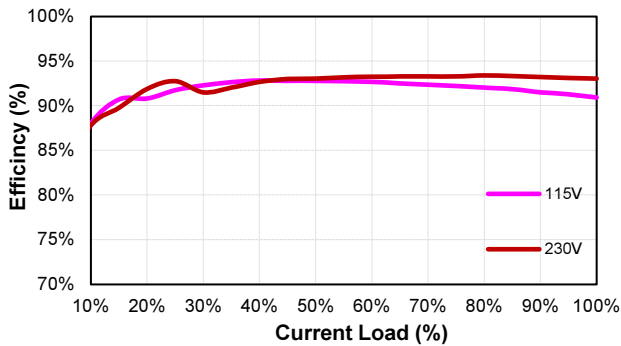


CFM500S180 (Eff Vs Io)

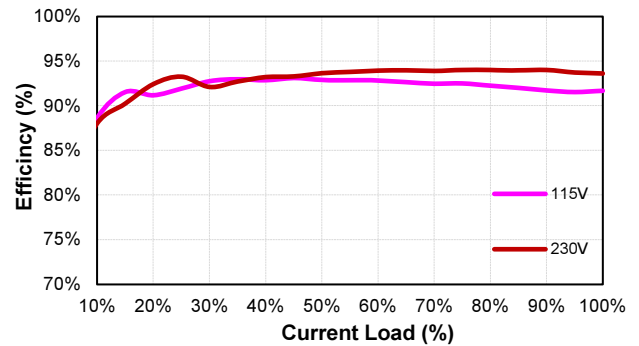


CFM500S240 (Eff Vs Io)

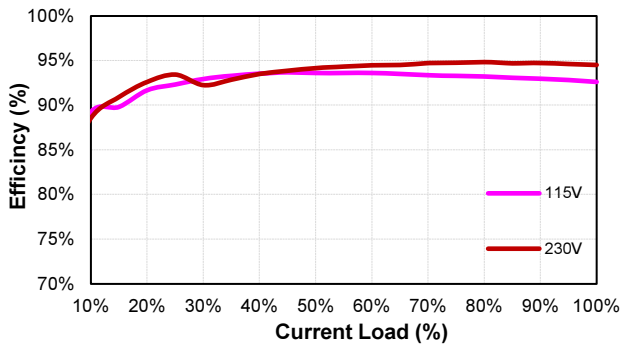

CFM500S360 (Eff Vs Io)

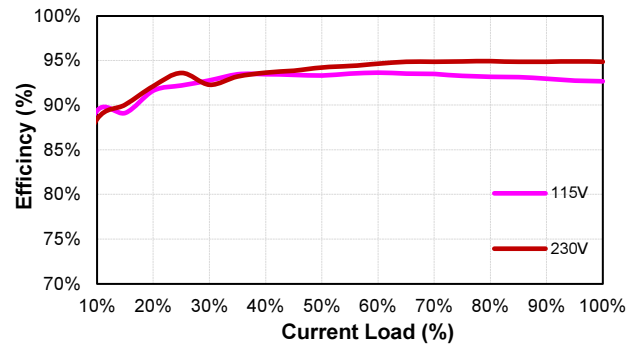



CFM500S480 (Eff Vs Io)

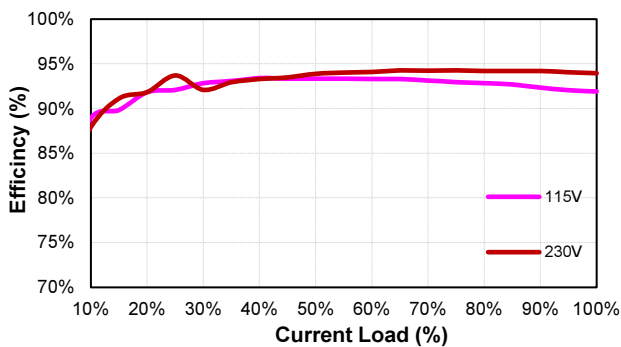



CFM500S Series

MECHANICAL SPECIFICATION

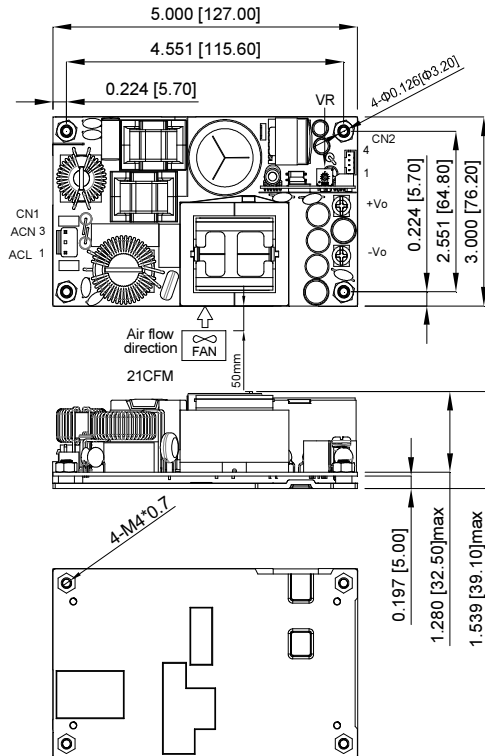

CN1:
PIN CONNECTION

Pin	Function
1	ACL
2	-
3	ACN

CN2:
PIN CONNECTION



Pin	Function
1	GND
2	+5VSB
3	GND
4	+12V-FAN

CN3:
PIN CONNECTION

Pin	Function
1	GND
2	PF
3	FAN-EN
4	PS-ON
5	-Sense
6	+Sense
7	OPTION

All Dimensions In Inches[mm]
Tolerance Inches:x.xxx= ± 0.02
Millimeters: x.xx = ± 0.5

CFM500SXXX

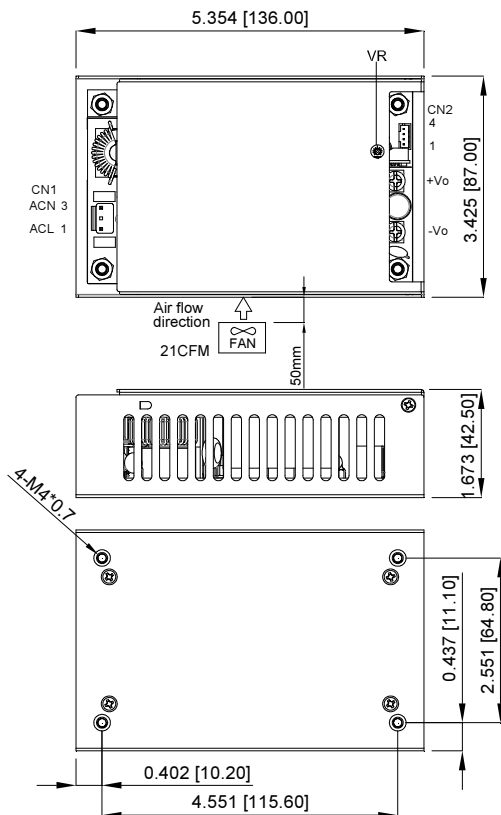

CN1:
PIN CONNECTION

Pin	Function
1	ACL
2	-
3	ACN

CN2:
PIN CONNECTION

Pin	Function
1	GND
2	+5VSB
3	GND
4	+12V-FAN

CN3:
PIN CONNECTION

Pin	Function
1	GND
2	PF
3	FAN-EN
4	PS-ON
5	-Sense
6	+Sense
7	OPTION

All Dimensions In Inches[mm]
Tolerance Inches:x.xxx= ± 0.02
Millimeters: x.xx = ± 0.5

CFM500SXXXC

CINCON Electronics Co. Ltd.
Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
Tel: 886-2-27086210
Fax: 886-2-27029852
E-mail: sales@cincon.com.tw
Web: www.cincon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Cincon](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [73-558-0015I](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#)
[LPM000-BBAR-01](#) [LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#)
[LDIN5075](#) [LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#)
[LPM124-OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-](#)
[1219-18S](#) [73-551-0015I](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-](#)
[30466-0028G](#) [VP-C2104853](#) [CA400](#) [H47251](#)