



# EC3A SERIES

## 3 WATT 2:1 INPUT RANGE

### DC-DC CONVERTERS



## FEATURES

- \* 3W Isolated Output
- \* 24-Pin DIP Package
- \* Efficiency to 82%
- \* 2:1 Input Range
- \* Regulated Outputs
- \* Pi Input Filter
- \* Continuous Short Circuit Protection
- \* UL60950-1 Approval for H/HM Versions only



MODEL NUMBER	INPUT VOLTAGE <sup>(1)</sup>	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF. <sup>(2)</sup>	CAPACITOR LOAD MAX.
				NO LOAD	FULL LOAD		
EC3A01	4.5-6 VDC	5 VDC	600 mA	15 mA	800 mA	75	2200uF
EC3A02	4.5-6 VDC	12 VDC	250 mA	15 mA	759 mA	79	2200uF
EC3A03	4.5-6 VDC	15 VDC	200 mA	15 mA	779 mA	77	2200uF
EC3A04	4.5-6 VDC	±5 VDC	±300 mA	25 mA	779 mA	77	1000uF
EC3A05	4.5-6 VDC	±12 VDC	±125 mA	25 mA	789 mA	76	1000uF
EC3A06	4.5-6 VDC	±15 VDC	±100 mA	25 mA	800 mA	75	1000uF
EC3A07	4.5-6 VDC	3.3 VDC	600 mA	15 mA	582 mA	68	2200uF
EC3A11	9-18 VDC	5 VDC	600 mA	7.5 mA	325 mA	77	2200uF
EC3A12	9-18 VDC	12 VDC	250 mA	7.5 mA	313 mA	80	2200uF
EC3A13	9-18 VDC	15 VDC	200 mA	7.5 mA	316 mA	79	2200uF
EC3A14	9-18 VDC	±5 VDC	±300 mA	12 mA	325 mA	77	1000uF
EC3A15	9-18 VDC	±12 VDC	±125 mA	12 mA	325 mA	77	1000uF
EC3A16	9-18 VDC	±15 VDC	±100 mA	12 mA	316 mA	79	1000uF
EC3A17	9-18 VDC	3.3 VDC	600 mA	7.5 mA	229 mA	72	2200uF
EC3A21	18-36 VDC	5 VDC	600 mA	5 mA	158 mA	79	2200uF
EC3A22	18-36 VDC	12 VDC	250 mA	5 mA	156 mA	80	2200uF
EC3A23	18-36 VDC	15 VDC	200 mA	5 mA	152 mA	82	2200uF
EC3A24	18-36 VDC	±5 VDC	±300 mA	7.5 mA	162 mA	77	1000uF
EC3A25	18-36 VDC	±12 VDC	±125 mA	7.5 mA	158 mA	79	1000uF
EC3A26	18-36 VDC	±15 VDC	±100 mA	7.5 mA	154 mA	81	1000uF
EC3A27	18-36 VDC	3.3 VDC	600 mA	5 mA	111 mA	74	2200uF
EC3A31	36-72 VDC	5 VDC	600 mA	2 mA	78 mA	79	2200uF
EC3A32	36-72 VDC	12 VDC	250 mA	2 mA	78 mA	80	2200uF
EC3A33	36-72 VDC	15 VDC	200 mA	2 mA	78 mA	80	2200uF
EC3A34	36-72 VDC	±5 VDC	±300 mA	3 mA	80 mA	78	1000uF
EC3A35	36-72 VDC	±12 VDC	±125 mA	3 mA	80 mA	78	1000uF
EC3A36	36-72 VDC	±15 VDC	±100 mA	3 mA	80 mA	78	1000uF
EC3A37	36-72 VDC	3.3 VDC	600 mA	3 mA	57 mA	72	2200uF

### NOTE:

1. Nominal input voltage is 5, 12, 24 or 48VDC.
2. Typical value at nominal input voltage and full load.

# SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

## INPUT SPECIFICATIONS:

Input Voltage Range	5V	4.5-6V
	12V	9-18V
	24V	18-36V
	48V	36-72V
Input Surge Voltage (100ms max.)	5V	10Vdc max.
	12V	25Vdc max.
	24V	50Vdc max.
	48V	100Vdc max.
Input Filter	Pi Type	

## OUTPUT SPECIFICATIONS:


Voltage Accuracy	±2.0% max.	
Voltage Balance (Dual)	±1.0% max.	
Temperature Coefficient	±0.05%/°C	
Ripple & Noise, 20MHz BW	3.3V/5V	100mV pk-pk, max.
	12V/15V	1% pk-pk max.
Short Circuit Protection	Continuous	
Line Regulation	Single/Dual (note1)	±0.5% max.
Load Regulation	Single (note2)	±0.5% max.
	Dual (note3)	±1.0% max.

## NOTE:

1. Measured from high line to low line.
2. Measured from full load to 10% load.
3. Measured from full load to 1/4 load.
4. Maximum case temperature under any operating condition should not be exceed 95°C (Plastic Case), 100°C (Copper Case).


## GENERAL SPECIFICATIONS:

Efficiency	See Table	
Isolation Voltage:	500 VDC min. Standard Models	
	3K VDC min. (Non-Conductive Black Plastic Only) Suffix "H" Models	
	1.5K VDC min. Suffix "HM" Models	
Isolation Resistance	10 <sup>8</sup> ohm min.	
Switching Frequency	100KHz min.	
Operating Ambient Temperature Range	-25°C to +71°C	
Power de-rating Curve	see Figure1	
Case Temperature (note4)	Plastic/Copper case 95°C/100°C max.	
Cooling	Natural Convection	
Storage Temperature Range	-40°C to +100°C	
Humidity	95% RH max. Non condensing	
MTBF	MIL-STD-217F 2000Khrs typ.	
Dimensions	DIP	1.25×0.80×0.40 inches(31.8×20.3×10.2 mm)
	SMD	1.25×0.80×0.45 inches(31.8×20.3×11.4 mm)
Case Material:	Standard Models Non-Conductive Black Plastic	
	Suffix "M" Models .. Black Coated Copper with Non-conductive Base	
Weight	12.5g	

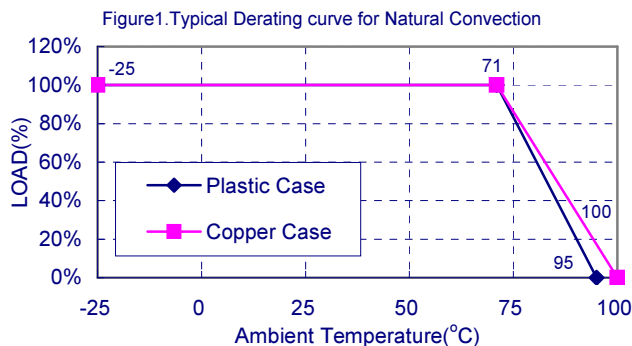

## Case A Dimensions:

NOTE: Pin Size is 0.02 ±0.002 Inch (0.5±0.05 mm)DIA  
 All Dimensions In Inches (mm)  
 Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010  
 Millimeters: X.X= ±0.5 , X.XX=±0.25

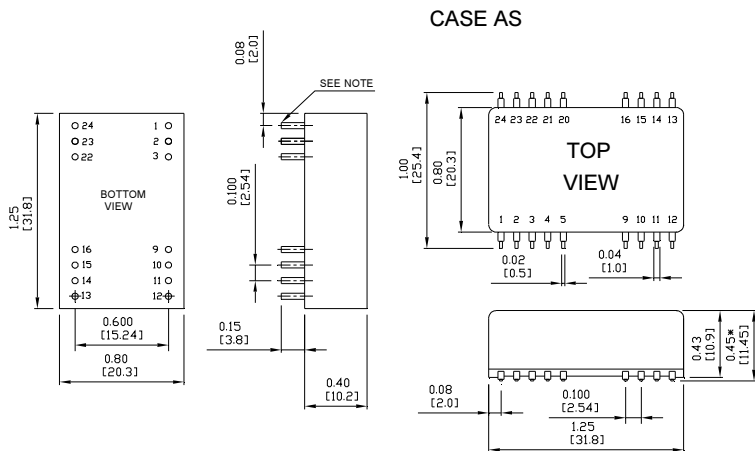

PIN CONNECTION									
Pin	500 VDC				1.5K & 3K VDC				
	Single Output		Dual Output		Pin	Single Output		Dual Output	
	DIP	SMD	DIP	SMD		DIP	SMD	DIP	SMD
1,24	+V Input		+V Input		1,24	NP	NC	NP	NC
2,23	NC		-V Output		2,3	-V Input		-V Input	
3,22	NC		Common		4,5	NP	NC	NP	NC
4	NP	NC	NP	NC	9	NC		Common	
5	NP	NC	NP	NC	10,15	NC		NC	
9	NP	NC	NP	NC	11	NC		-V Output	
10,15	-V Output		Common		12,13	NP	NC	NP	NC
11,14	+V Output		+V Output		14	+V Output		+V Output	
12,13	-V Input		-V Input		16	-V Output		Common	
16	NP	NC	NP	NC	20,21	NP	NC	NP	NC
20,21	NP	NC	NP	NC	22,23	+V Input		+V Input	

\* NP-NO PIN  
 \* NC-NO CONNECTION WITH PIN

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [Cincon](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)  
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)  
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)