


DLA-48D3-Ex



- UL121201 LISTED-Hazardous Locations
- UL497B LISTED
- Hybrid SAD-GDT Technology
- 20kA I_{max} (1x-8/20us)
- 5kA I_{imp} (2x-10/350us)
- 10kA I_n (10x-8/20us)
- Modular
- 2W+SHIELD+G

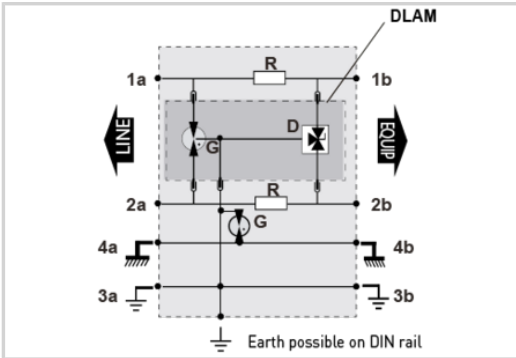

Electrical Characteristics		
DATA SPD TYPE		UL Listed for Hazardous Locations
VOLTS	(V)	48
WIRES		2W+SHIELD+GROUND
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	70
MCOV	(V)	60/72/72
IN10 impulses 8/20µs	(kA)	10
IMAX8/20µs	(kA)	20
I _{imp} 10/350µs	(kA)	5
DATA SPEED	(bps)	10/100
FREQUENCY	(MHz)	>3
INSERTION LOSS (@ FREQ)	(db)	< 1
CAPACITANCE	(pF)	< 50
Mechanical Characteristics		
TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		1 Channel (2W+SHIELD+G)
CONNECTION METHOD		Screw Terminal (16-22AWG)
MOUNTING		DIN RAIL
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		DLAM-48D3
Standards		
UL STANDARD		UL497B & UL121201 Hazardous Location
UL CATEGORY		QVQG & QVSI
UL FILE NUMBER		E184939 & E527349
UL121201 HAZARDOUS LOCATION		Class I, Division 2, Groups A, B, C & D: Operating. Temp. T5
STANDARDS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
897013		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surge Suppressors](#) category:

Click to view products by [Citel](#) manufacturer:

Other Similar products are found below :

[GUS11](#) [GUS4](#) [30460](#) [1810-15-A3](#) [4B06B-EC1-150LF](#) [CX06M](#) [CCTV1](#) [GUS13](#) [GUS14](#) [GUS5](#) [VAL-MS 320/3+0-FM](#) [TTC-6-1X2-M-24DC-UT-I](#) [TTC-6-1X2-F-M-24DC-UT-I](#) [TTC-6P-1X2-24DC-UT-I](#) [TTC-6P-1X2-M-24DC-UT-I](#) [VAL-SEC-T2-1S-350-FM](#) [VAL-US-120/40/1+1-FM](#) [VAL-US-120/65/1+1-FM](#) [VAL-US-120/65/2+0-FM](#) [VAL-US-480D/30/3+0-FM](#) [VAL-US-600D/30/3+0-FM](#) [VAL-US-120/40/1+0-FM](#) [STCHSP121BT1RU](#) [LP-BFDN-CW](#) [LP-STRL-NFF](#) [LP-STRL-DFE](#) [0804111](#) [STC-CAT6-POE-I](#) [TTC-6-2X1-24DC-UT](#) [DS71RS-120](#) [P8AX09-T/MF](#) [CRMJ8-POE-C6](#) [DS42S-48DC](#) [MJ8-CAT6S](#) [DS41S-280](#) [3414.99.0021](#) [3414.99.0008](#) [STCSS640362](#) [SMTPA200](#) [1063120000](#) [2800532](#) [2800786](#) [2800983](#) [2800989](#) [2081890000](#) [2080480000](#) [2080490000](#) [2080650000](#) [2859233](#) [2859330](#)