

RAFIX 16 - Emergency stop pushbutton, round collar, conical, dupe-proof, non-blocking

1.30.074.281/0300

General information

Only use universal contact blocks with momentary function.


The positively driven mechanical arrangement is dupe-proof to EN 418.





General information	
Actuator	mushroom
Color of mushroom	opaque red
Form of collar	round
Dimensions	
Collar dimensions	ø 24.95 mm
Overall height	29 mm
Mounting depth	44.7 mm
Mounting hole	16.2 mm
Mechanical design	
Mounting	ring nut
Contact function	latching
Contact arrangement	according to contact block
Illumination	no
Reset	counterclockwise or clockwise rotation
Mechanical characteristics	
Robustness max.	100 N
Robustness	acc. to IEC 60947-5-5
Other specifications	
Operating life (operations)	30,000 cycle
Degree of protection from front side	IP65 (DIN EN 60529)
Operation temperature min.	-25 °C
Ambient temp. operating max. without lamp / LED	+70 °C
Ambient temp. operating max. with lamp /LED	+55 °C
Storage temperature min.	-40 °C
Storage temperature max.	+85 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
Corresponding to CE Ma-Dir. 89/392	yes
ROHS compliant	yes
REACH compliant	yes



Panel cut-out



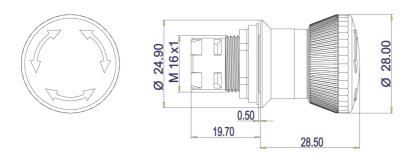



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Emergency Stop Switches / E-Stop Switches category:

Click to view products by C&K manufacturer:

Other Similar products are found below:

84-5021.2B40 84-6830.0020 A01ESSP8 A22EL-M-24A-11B AVN302N-R A165E-S-01(STOP) AYLD2212602SN-R-TK962

AVLD39911N-R-24V A22Z-EG22 A165E-SY 3100.0110Y 3050.1302Y 3SE2243-0XX40 3SK1111-2AB30 3SK1211-1BB40 44-710 84-6841.2B20 84-6830.0040 H3141AAKAA A165E-R-24D-01 E3102AAAAB A22E-M-03 ZA2BV05 A22EL-M-T2-01 951FY000-WO

ER6022-022N 952+2000-00 ES3S51653 601+0000-OP E3101AAAAB 84-5130.0040 CS AR-05V024 CS AR-22V024 DS AE1VA DS

KB2A DS KB3A HE2G-21SHE-L-K HE6B-M211Y 774191 774316 777760 R1.100.0129.0 SMA0129- NO/NO R1.188.0640.0 SNV

4063KL-A R1.188.1810.0 SNA 4043K-A R1.188.1840.0 SNA 4043K-A SR BD40ALK-B02F AVLW39911D-R-120V AYD311NUG

AVLD32211DNUR 84-5040.0020.0049