


# C&K RF 19 Series Short Travel Tactile Switches

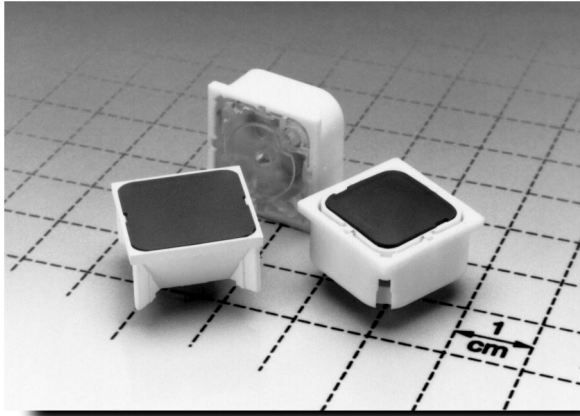

## Features/Benefits

- Long life—1,000,000 cycles
- Illumination available
- Highly reliable contact design
- Fully illuminated with corner LED indicator

## Typical Applications

- Medical equipment
- Instrumentation equipment
- Machine process control

## How To Order

To order, select switch/housing part number. Other illumination options available, consult Customer Service Center.

## Specifications

CONTACT RATING: 0.01 - 100 mA @ 0.02 - 42 V AC/DC (Au).  
0.1 - 250 mA @ 3 - 50 V AC/DC (Ag).  
RATED POWER: 2 W AC/DC (Au), 12.5 W AC/DC (Ag)  
resistive load respectively.  
CONTACT RESISTANCE: ≤ 100 milliohms when new.  
BOUNCE: ≤ 5 ms.  
CONTACT SYSTEM: Snap-action contact.  
CONTACT ARRANGEMENT: SPST NO.  
FIXING: By soldering.  
SOLDERING TEMPERATURE: 250°C.  
SOLDERING TIME: 2.5 sec. max.  
SWITCHING TRAVEL: 0.5 + 0.2 mm.  
OPERATING LIFE: 1,000,000 cycles min.

OPERATING FORCE: 2 - 3 N max.  
AMBIENT OPERATING TEMPERATURE: - 25°C to+ 70°C;  
- 13°F to+ 158°F.  
AMBIENT STORAGE TEMPERATURE: - 40°C to + 80°C;  
- 40°F to + 176°F.  
PACKAGING: Tube packaging, 25 switches.

## Materials

SWITCH HOUSING: PBTB.  
TRANSPARENT ACTUATOR: PC.  
COLORED ACTUATOR: Plexiglass HW55.  
CONTACT MATERIAL: Au or Ag.  
TERMINALS: Contact spring: Tin-plated. Stationary contact:  
Au version tin-plated, Ag version silver-plated.  
FLAMMABILITY OF PLASTIC MATERIALS: UL 94 HB.





C

Tactile

## RF 19 Illuminated Short Travel Tactile Switches



3.14002.5130000  
SPST N.O.


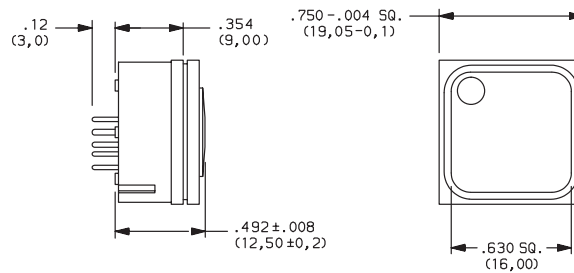


View on component side.  
All hole diameters: .043 ± .004  
PCB layout: 1/400" grid.

SWITCH & HOUSING				ILLUMINATION		SCHEMATIC
PART NUMBER	FUNCTION	CONTACT MATERIAL	KEY PAD COLOR	STANDARD LED	SPOT LED COLOR	
3.14002.5130000	SPST N.O.	Au	Red	Fully illuminated (2 LEDs) & spot illuminated (1 LED)	Green	
3.14002.5320000			Green		Red	
3.14002.5530000			Yellow		Green	
3.14002.5830000			Blue		Green	
3.14002.5230000		Ag	Red		Green	
3.14002.5420000			Green		Red	
3.14002.5630000			Yellow		Green	
3.14002.5880000			Blue		Green	

# C&K RF 19 Series Short Travel Tactile Switches

## RF 19 Non-Illuminated Short Travel Tactile Switches

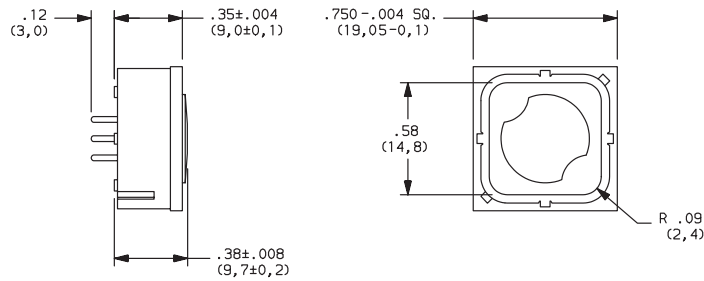


View on component side.  
All hole diameters: .043 ± .004  
PCB layout: 1/400" grid.



3.14001.0010000  
SPST N.O.

### FORCE/TRAVEL DIAGRAM





F1 = Max. operating force  
F2 = Force at contact  
F2 is max. 55% of F1.

SWITCH & HOUSING				SCHEMATIC
PART NUMBER	FUNCTION	CONTACT MATERIAL	ACTUATOR COLOR	
3.14001.0010000	SPST N.O.	Au	Opaque White	
3.14001.0060000		Ag		



## RF 19 Illuminated Short Travel Tactile Switches

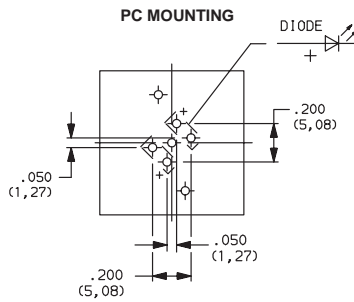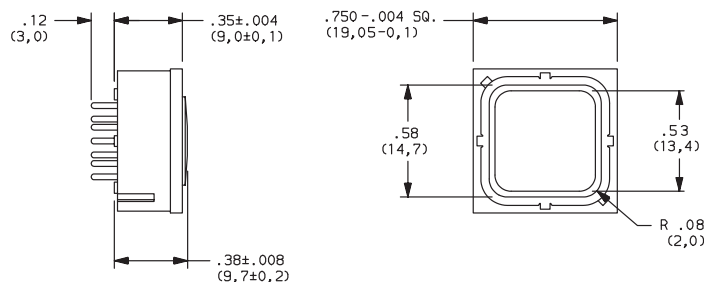

View on component side.  
All hole diameters: .043 ± .004  
PCB layout: 1/400" grid.



3.14002.0110000  
SPST N.O.


SWITCH & HOUSING				ILLUMINATION		SCHEMATIC
PART NUMBER	FUNCTION	CONTACT MATERIAL	ACTUATOR COLOR	STANDARD LED	LED COLOR	
3.14002.0110000	SPST N.O.	Au	Red	2 LEDs Fully illuminated	Red	
3.14002.0120000			Green		Green	
3.14002.0130000			Yellow		Yellow	
3.14002.0210000		Ag	Red		Red	
3.14002.0220000			Green		Green	
3.14002.0230000			Yellow		Yellow	

# C&K RF 19 Series Short Travel Tactile Switches

## RF 19 Illuminated Short Travel Tactile Switches




3.14001.0300000  
SPST N.O.

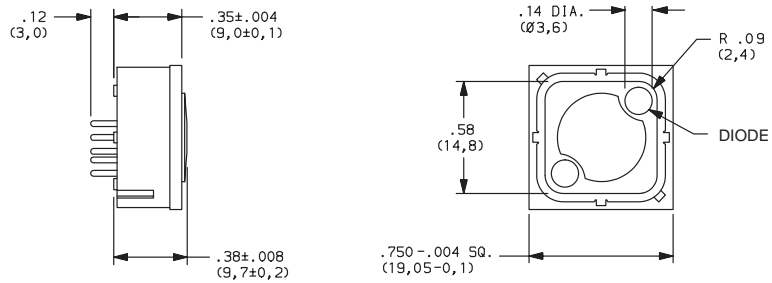


C

Tactile

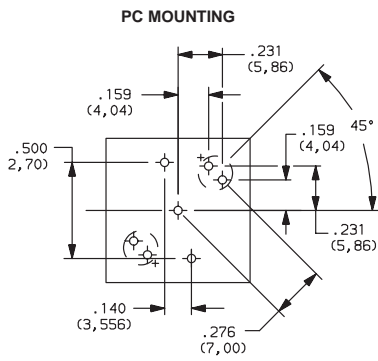

View on component side.  
All hole diameters: .043 ± .004  
PCB layout: 1/400" grid.  
The LED may be positioned on either  
the left-hand (std.) or right-hand side.

SWITCH & HOUSING				ILLUMINATION		SCHEMATIC
PART NUMBER	FUNCTION	CONTACT MATERIAL	ACTUATOR COLOR	STANDARD LED	SPOT LED COLOR	
3.14001.0300000	SPST N.O.	Au	Opaque White	1 LED spot illuminated	Blue	
3.14001.0310000					Red	
3.14001.0320000					Green	
3.14001.0330000					Yellow	
3.14001.0400000		Blue				
3.14001.0410000		Red				
3.14001.0420000		Green				
3.14001.0430000		Yellow				



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Tactile Switches](#) category:*

*Click to view products by [C&K](#) manufacturer:*

Other Similar products are found below :

[KMR633NG LFG](#) [5GTH92001](#) [5GTH9202242](#) [6426-201-11343](#) [MJ1226](#) [MJTP1109B](#) [MJTP1138EAUTR](#) [MJTP1230BL](#) [MJTPSHW](#)  
[GS6.90F300QP](#) [1-1977223-0](#) [1-1977120-4](#) [ADTSA62NV](#) [ADTSA62RV](#) [ADTSA63KV](#) [ADTSA644NV](#) [ADTSM24NVTR](#) [ADTSMW66NV](#)  
[ADTSMW67RV](#) [ATM533VTR](#) [1571300-3](#) [B3F-3123](#) [B3F-6055A](#) [B3F-B32-01-KIT](#) [1977177-8](#) [1977266-1](#) [2-1977223-4](#) [2-1977223-7](#)  
[ADTS644KV](#) [ADTSA61RV](#) [ADTSA62KV](#) [ADTSA63NV](#) [ADTSA63RV](#) [ADTSA65NV](#) [ADTSM21NSVTR](#) [ADTSM25RVTR](#)  
[ADTSM31RVTR](#) [ADTSM32NVTR](#) [ADTSM61YVTR](#) [ADTSM63SVTR](#) [ADTSM644KVTR](#) [ADTSMW64RV](#) [ADTSMW69NV](#)  
[FSMRA4JHA04](#) [GS4.70F300QP](#) [D38999/20JJ37SA](#) [TL1105B](#) [TL1105J](#) [ATH447K2Q](#) [ATM534VTR](#)