Features/Benefits

- 4.2 x 3.2 mm footprint
- 2.5 mm thickness
- High number of cycles
- Color coded actuators

Specifications

FUNCTION: momentary action CONTACT ARRANGEMENT: 1 make contact = SPST N.O. TERMINALS: J type for SMT TRAVEL: 160 & 260 gf: 0.15mm ± 0.1mm 400 & 600 gf: 0.20mm ± 0.1mm

	Operating	Operating Life
	Force (gf)	(operations)
PTS810 SJM 250 SMTR LFS	160 ± 50	150,000
PTS810 SJK 250 SMTR LFS	260 ± 70	50,000
PTS810 SJG 250 SMTR LFS	400 ± 100	100,000
PTS810 SJS 250 SMTR LFS	600 ± 150	150,000

Packaging

Switches in reels of 2,900 pieces. Dimensions of reels according to EIA 481B External diameter 330 mm

Typical Applications

- Control panels
- Nomad devices
- Remote controls



Electrical

MAXIMUM VOLTAGE:
MAXIMUM CURRENT DC:
DIELECTRIC STRENGTH:
CONTACT RESISTANCE:
INSULATION RESISTANCE:
BOUNCE TIME:

250 VA C (1mn) ≤ 500 mΩ ≥ 100 MΩ ≤ 10 ms

16 VDC

50 mA

Environmental

OPERATING TEMPERATURE: -40°C to 85°C

Process


SOLDERING: This component is suited to the following methods: Infrared Reflow Soldering in accordance with IEC61760-1

NOTE: Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

For any part number different from those listed above, please consult your local representative.

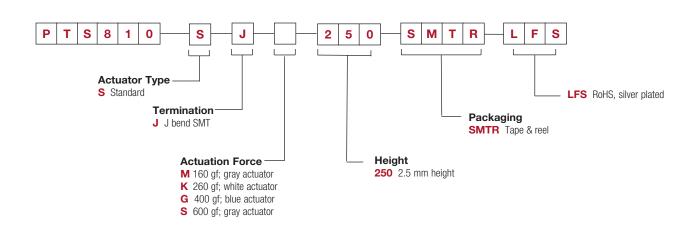




5


PTS 810 Series Microminiature SMT Top Actuated

PTS810

٦ آر

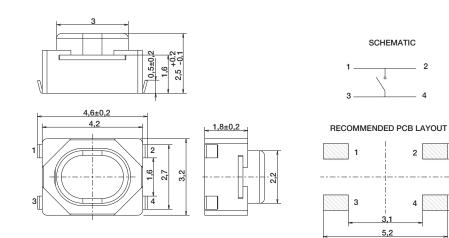

TAPE & REEL

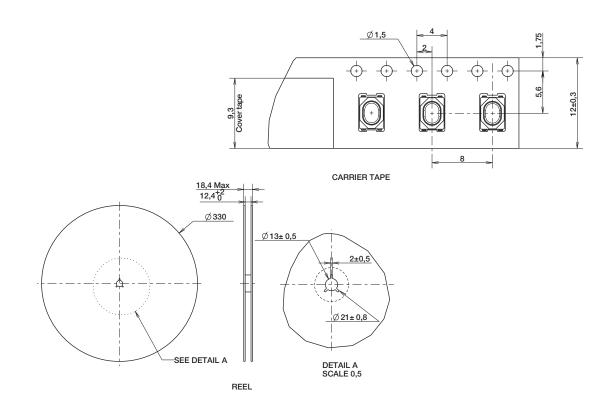



www.ckswitches.com

1,5 2,8

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Switch Bezels / Switch Caps category:

Click to view products by C&K manufacturer:

Other Similar products are found below :

 896809000
 LW1A-B2-R
 LW2A-B1-G
 704.604.4
 704.955.3
 F1403
 7527
 760203000
 760503000
 785105000
 785106000

 79211759
 MH11
 MH13
 MHU31
 MJ1216
 MJ326
 MJ33
 MJ612
 MJ626
 MJ627
 9001T8BK
 908-1634
 92-343.200
 92-343.400
 95804.920

 95CAP-011
 95CAP-112
 11-932.7
 99-901.9
 99-909.4
 99-909.5
 99-920.8
 A0261A
 11-931.2
 11-936
 11-937
 AKTSC22B
 AT496H

 AW-RF8
 161006
 1825068-6
 184-1872
 187-1872
 188-1471
 18-920.1
 C1103
 1DFBLK