


CPDT6-5V0UPC-HF

RoHs Device
Halogen Free




Features


- ESD Protect for 4 high-speed I/O channels.
- IEC61000-4-2(ESD); $\pm 30\text{KV}$ (contact)
- Working voltage: 5V
- Low capacitance: 2.2pF(Typ.).
- High component density.

Mechanical data


- Case: SOT-23-6 standard package, molded plastic.
- Terminals: Solder plated, solderable per MIL-STD-750, method 2026.
- Mounting position: Any
- Weight: 0.015 grams(approx.).

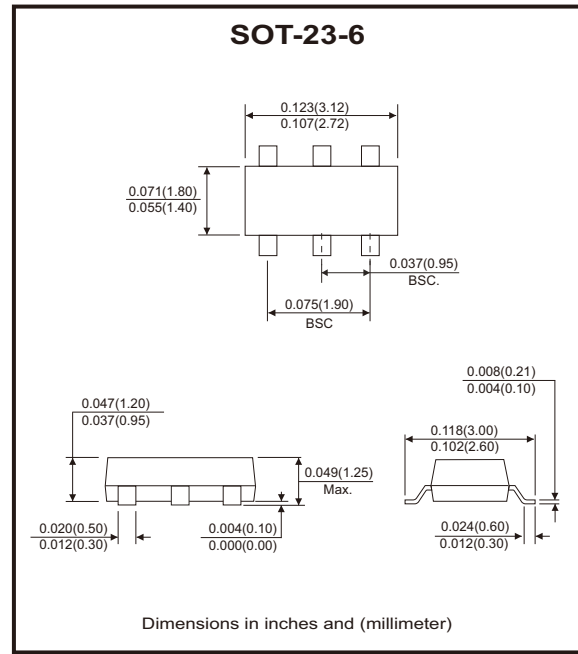

Circuit Diagram



Pin Configuration



Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power ($t_p = 8/20 \text{ us}$)	P _{PK}	125	W
Peak pulse current ($t_p = 8/20 \text{ us}$)	I _{PP}	10	A
ESD per IEC 61000-4-2(Air) ESD per IEC 61000-4-2(Contact)	V _{ESD_I/O}	± 30	kV
ESD per IEC 61000-4-2(Air)(VCC-GND) ESD per IEC 61000-4-2(Contact)(VCC-GND)	V _{ESD_VCC}	± 30	kV
Lead soldering temperature	T _{SOL}	260 (10 sec)	°C
Operating temperature range	T _J	-40 to +125	°C
Storage temperature range	T _{STG}	-55 to +150	°C
I/O voltage tolerance	V _{I/O}	-0.6 to V _{CC} + 0.6	V

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse stand-Off voltage		V_{RWM}			5	V
Reverse leakage current	$V_{RWM} = 5\text{ V}$, I/O to GND & V_{CC} to GND	I_R			1	μA
Reverse breakdown voltage	$I_T = 1\text{ mA}$	V_{BR}	6		9	V
Forward voltage	$I_F = 10\text{ mA}$	V_F		0.8	1	V
Clamping voltage	$I_{PP} = 1\text{ A}$, $t_p=8/20\mu\text{s}$, I/O to GND & V_{CC} to GND	V_C		8.6	9.8	V
	$I_{PP} = 10\text{ A}$, $t_p=8/20\mu\text{s}$, I/O to GND & V_{CC} to GND			11.3	12.5	
Junction capacitance	Any I/O to GND $V_R = 0\text{V}$, $f = 1\text{MHz}$	C_j		2.2	4	pF
	I/O to I/O $V_R = 0\text{V}$, $f = 1\text{MHz}$				2	

RATING AND CHARACTERISTIC CURVES (CPDT6-5V0UPC-HF)

Fig.1 - 8/20us Peak Pulse Current Wave Form Acc. IEC 61000-4-5

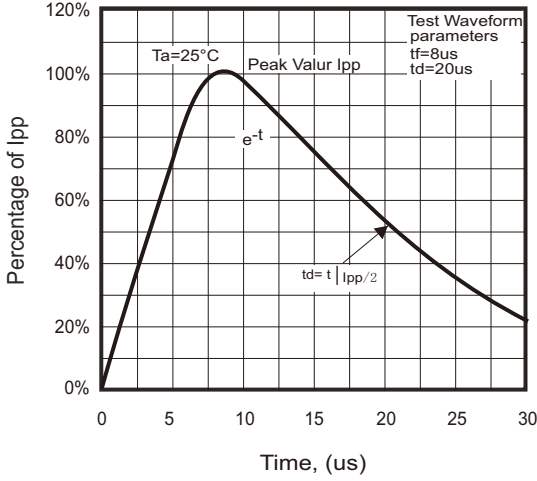


Fig.2 - Power Derating Curve

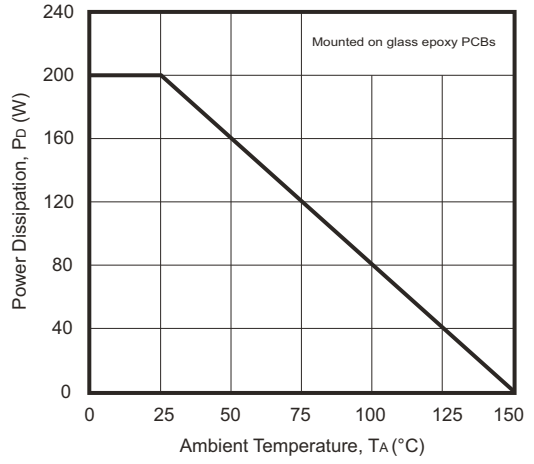


Fig.3 - Forward Characteristic

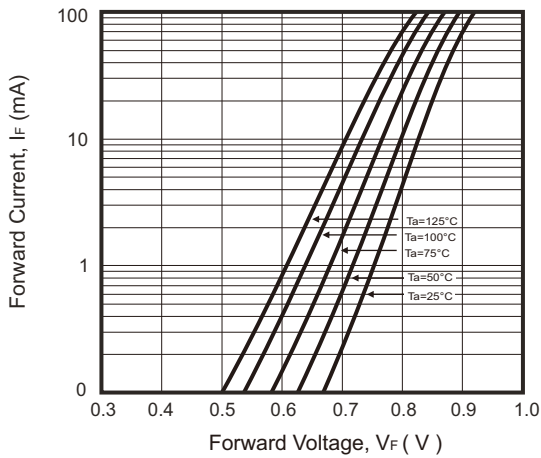


Fig.4 - Clamping Voltage Vs. Peak Pulse Current






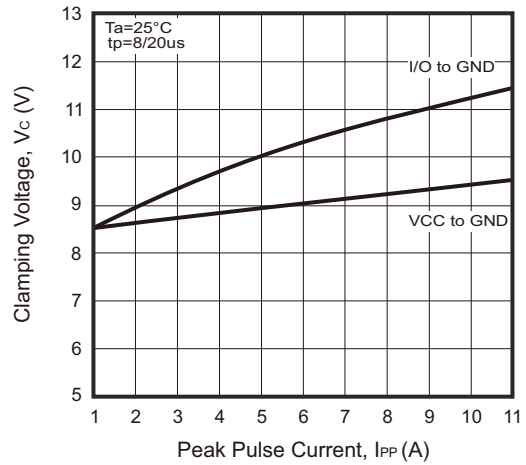


Fig.5 - Capacitance Characteristics

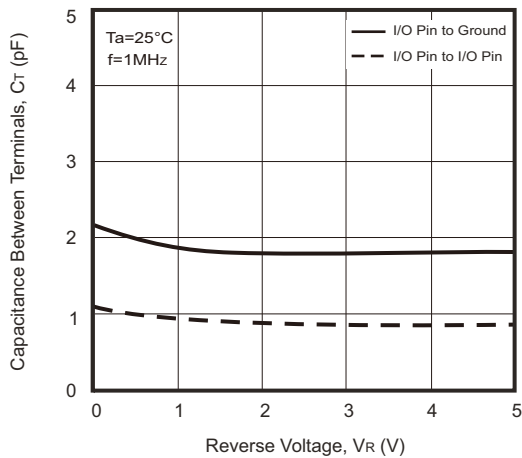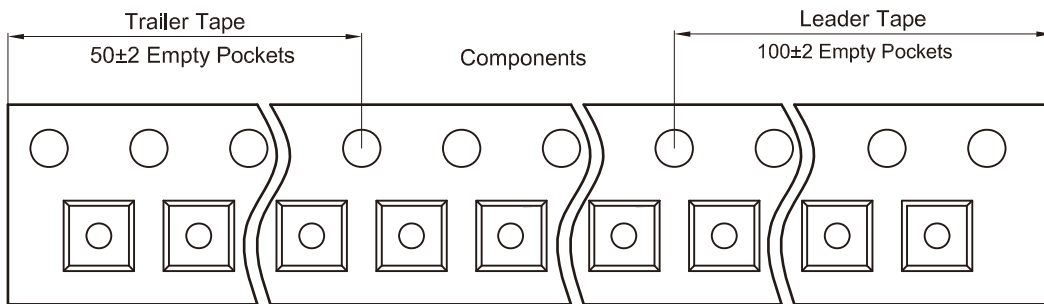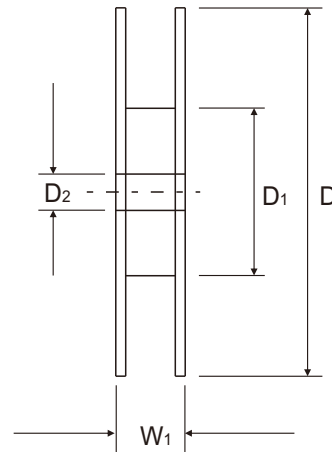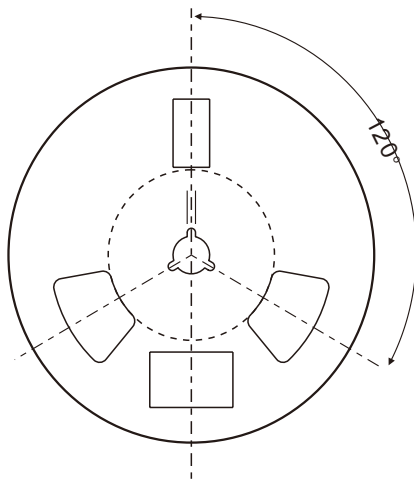

Reel Taping Specification

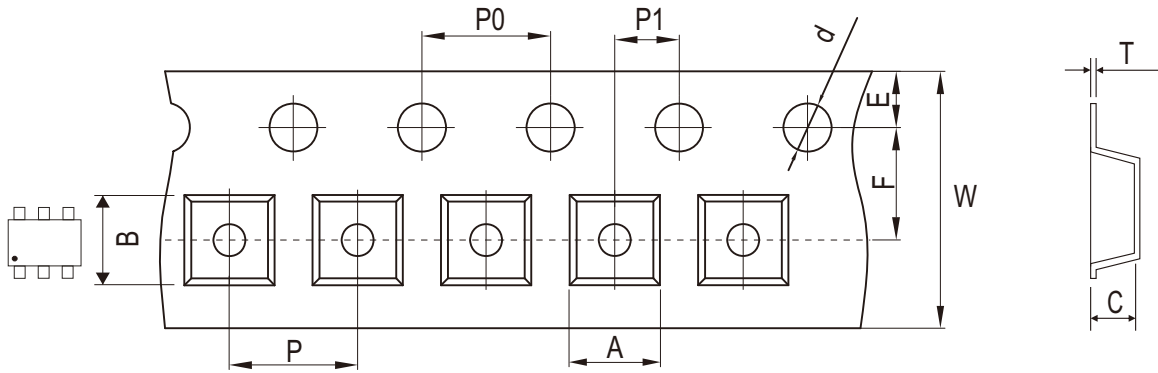


	SYMBOL	A	B	C	d	D	D1	D2
SOT-23-6	(mm)	3.26 ± 0.10	3.30 ± 0.10	1.40 ± 0.10	1.55 + 0.10 - 0.00	180.00 ± 1.00	54.40 + 1.00 - 0.00	13.00 + 0.50 - 0.20
	(inch)	0.128 ± 0.004	0.130 ± 0.004	0.055 ± 0.004	0.061 + 0.004 - 0.000	7.087 ± 0.039	20142 + 0.039 - 0.000	0.512 + 0.020 - 0.008

	SYMBOL	E	F	P	P0	P1	W	W1
SOT-23-6	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 ± 0.10	12.00 + 1.00 - 0.30
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.315 ± 0.004	0.472 + 0.039 - 0.012


Marking Code

Part Number	Marking Code
CPDT6-5V0UPC-HF	.E5UP



Suggested PAD Layout

SIZE	SOT-23-6	
	(mm)	(inch)
A	1.00	0.039
B	0.70	0.028
C	0.95	0.037
D	2.40	0.094
E	3.40	0.134

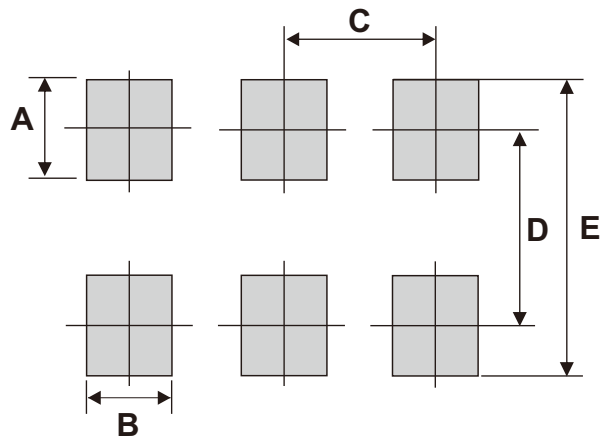

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23-6	3,000	7

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Comchip](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#)
[P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#)
[ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#)
[3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201 E6327](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#)
[82356240030](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#)
[D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#) [5KP15A](#)