

CONQUER

Miniature Fuse

Type UDA/UDA-A


50X20mm RoHS Pb

Time-Lag High Breaking Capacity



UDA

UDA-A

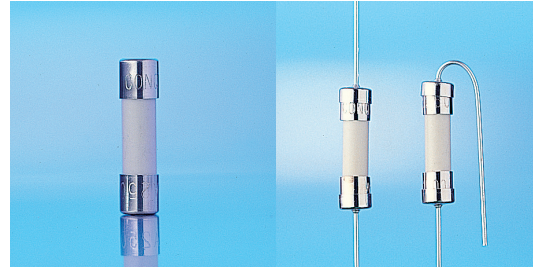

Approval

UDA

SEMKO	800mA~12A/25A
VDE	800mA~12A
BSI	1A~6.3A
UL Recognized	500mA~10A
CSA Acceptance	800mA~10A
PSE	1A~15A
KTL	1A~10A
CCC	1A~6.3A
CQC	8A / 10A
TUV	15A~20A
Recognized Component for Canada and U.S.	10.1A~25A

UDA-A

SEMKO	800mA~12A
VDE	800mA~12A
UL Recognized	500mA~10A
CSA Acceptance	800mA~10A
PSE	1A~15A
KTL	1A~10A
CCC	1A~6.3A
CQC	8A / 10A
TUV	15A~25A
Recognized Component for Canada and U.S.	10.1A~25A

Electrical Characteristic

Rated Current	1.5 In		2.1 In		2.75 In		4 In		10 In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
500mA~800mA	60	30	250	80	50	5	5	150	5	150
1A~3.15A	60	30	750	80	95	5	10	150	5	150
4A~6.3A	60	30	750	80	150	5	10	150	5	150
8A~25A	30	30	750	80	150	5	10	150	5	150

Interrupting Rating

500mA~12A :	1500 amperes at 250V AC
15A~16A :	500 amperes at 250V AC
20A :	400 amperes at 250V AC
25A :	300 amperes at 250V AC

Operating Temperature

-55°C to +125°C

Physical Specification

Material

Ceramic body / Nickel Plated Brass Caps

Lead Wire:

Diameter Ø0.8mm 12A and less.

Diameter Ø1.0mm for rating above 15A.


Packaging

In Bulk:

UDA - 1,000 pcs ; UDA-A - 500 pcs per box

Catalog Number	Ampere Rating [In]	Voltage Rating (V)	Nominal Resistance Cold Ohms	Voltage Drop (mv)MAX	Nominal Melting I ² t A ² Sec
UDA/UDA-A .500	500mA	250V	0.2276	850	0.7290
UDA/UDA-A .630	630mA		0.1392	650	1.6880
UDA/UDA-A .800	800mA		0.1180	500	2.3040
UDA/UDA-A 001	1A		0.0730	350	6.5570
UDA/UDA-A 1.25	1.25A		0.0630	300	7.8125
UDA/UDA-A 1.60	1.6A		0.0600	200	8.9600
UDA/UDA-A 002	2A		0.0499	190	18.576
UDA/UDA-A 2.50	2.5A		0.0384	180	29.070
UDA/UDA-A 3.15	3.15A		0.0290	140	39.564
UDA/UDA-A 004	4A		0.0186	100	97.920
UDA/UDA-A 005	5A		0.0135	100	166.77
UDA/UDA-A 6.30	6.3A		0.0105	100	198.48
UDA/UDA-A 008	8A		0.0068	100	230.19
UDA/UDA-A 010	10A		0.0050	100	377.77
UDA/UDA-A 012	12A		0.0034	100	848.88
UDA/UDA-A 015	15A		0.0032	100	900.32
UDA/UDA-A 016	16A		0.0030	100	1086.6
UDA/UDA-A 020	20A		0.0023	100	1687.0
UDA/UDA-A 025	25A		0.0018	100	4121.4

Mechanical Dimension

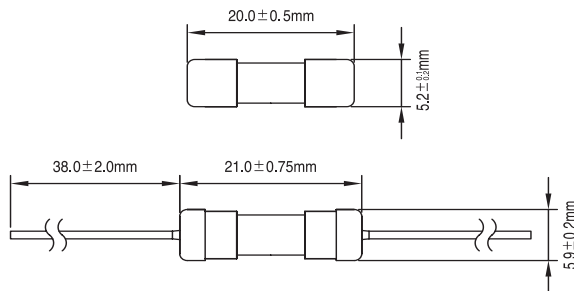

45

Conquer Electronics Co., Ltd.

Conquer Electronics Co., Ltd.

No.26, Wucyuan 5th Rd., Wugu Dist.,(New Taipei Industrial Park) New Taipei City 24888, Taiwan TEL: 886-2-8990-2189 (Rep.) FAX: 886-2-8990-2577
Official Website: <http://www.conquer.com.tw>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [Conquer](#) manufacturer:

Other Similar products are found below :

[MBO-20](#) [MDA-V-1/100](#) [12C10X38GI](#) [AGA-V-2-1/2](#) [AGC-V-3-12-R](#) [AGY-50](#) [MSL-3](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#)
[BK1-GMA-200-R](#) [BK1GMA-6-R](#) [BK1/GMC-100-R](#) [BK1/GMC-1.5-R](#) [BK1-GMC-2-5-R](#) [BK1GMD-4-R](#) [BK1S500-250-R](#) [BK1S500-32-R](#)
[BK1-S500-4-R](#) [BK1S500-5-R](#) [BK1-S505-1-R](#) [BK1-S506-2-R](#) [BK1-S506-3-15-R](#) [BK1/S506-63-R](#) [BK/ABC-5RX](#) [BK/AGW-B-4](#) [BK/AVX-](#)
[1/4](#) [BK/C515S-250-R](#) [BK/MBO-20](#) [BK/MBO-8](#) [BK/MDM-3/4](#) [BK-MDQ-4](#) [BK/S505-V-2.5A](#) [BK/TDC120-15](#) [BK/TDC120-20](#)
[BK/TDC122-45](#) [BP/MDL-7](#) [1C10X38AM](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [AGA-V-7-1/2](#) [AGC-15WX](#) [AGC-2-1-2-R](#) [20.0M6.3X32F](#)
[20C8X32GI](#) [GMC-50-R](#) [361.250](#) [MBO-8](#) [TDC121-30](#)