



SECTION 2

HEAT DISSIPATORS FOR PLASTIC CASE, CASE-MOUNTED SEMICONDUCTORS

Horizontally mounted, light-weight, low-cost heat dissipators


- Accommodates all flat plastic case power semiconductors.
- Efficient design requires just .71 sq. in. of board area (PA Series) and .31" to .5" height above board.
- Larger PB Series offers greater heat dissipation, additional hole patterns, and dual semiconductor mounting capability.
- Only one mounting screw required to secure dissipators to semiconductor and circuit board.
- Most effective heat dissipator in performance/unit cost.

PC1-1CB

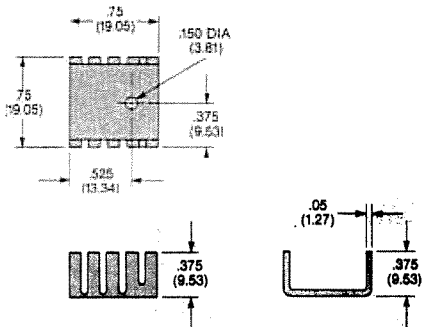

Dimensions are for reference use only. Contact IERC for dimensions with tolerances or standard part drawings.

PC1-1CB w/TIP-29C (TO-220) TRANSISTOR

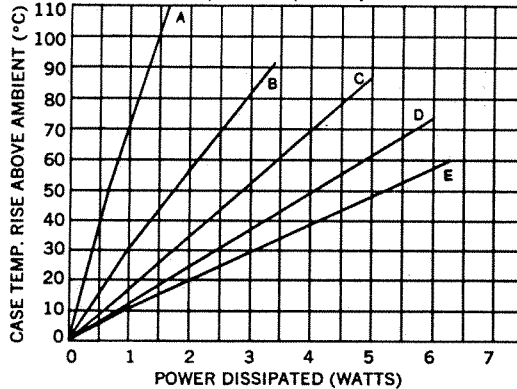



DESCRIPTION OF CURVES
 A. N.C. Horiz. Device Only Mounted to G-10.
 B. N.C. Horiz. & Vert. With Dissipator.
 C. 200 FPM w/Diss.
 D. 500 FPM w/Diss.
 E. 1000 FPM w/Diss.

- Thermal Resistance Case to Sink is 0.9-1.1 °C/W w/Joint Compound.
- Derate 2.4 °C/watt for unplated part in natural convection only.

Ordering Information


IERC PART NO.			Semiconductor Accommodated	Max. Weight (Grams)
Unplated	Comm'l. Black Anodize	Mil. Black Anodize		
PC1-1U	PC1-1CB	PC1-1B	TO-126, TO-127, TO-220	1.9

PA1 Series

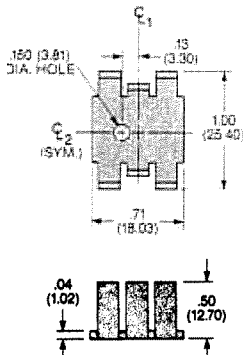

Dimensions are for reference use only. Contact IERC for dimensions with tolerances or standard part drawings.

PA1-1U w/TIP-29C (TO-220) TRANSISTOR

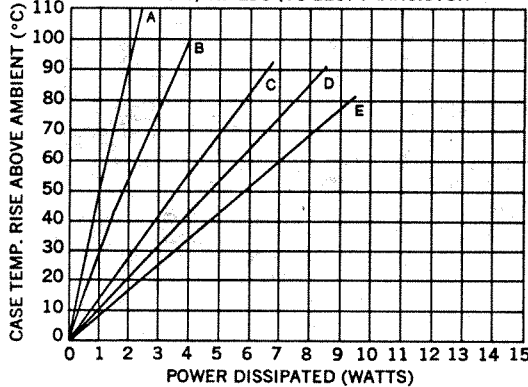

DESCRIPTION OF CURVES
 A. N.C. Horiz. Device Only Mounted to G-10.
 B. N.C. Horiz. & Vert. With Dissipator.
 C. 200 FPM w/Diss.
 D. 500 FPM w/Diss.
 E. 1000 FPM w/Diss.

- Thermal Resistance Case to Sink is 0.9-1.1 °C/W w/Joint Compound.
- Uprate 2.4 °C/watt for black part in natural convection only.
- Derate 0.6 °C/watt for Insulube® part in natural convection only.

Ordering Information

IERC PART NO.				Semiconductor Accommodated	Max. Weight (Grams)
Unplated	Com'l. Black Anodize	Mil. Black Anodize	Insulube® 448		
PA1U	PA1CB	PA1B	PA1	Undrilled	2.0
PA1-1U	PA1-1CB	PA1-1B	PA1-1	TO-126, TO-127, TO-220	2.0

Note: See page 1v for other finishes.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Sinks](#) category:

Click to view products by [CTS](#) manufacturer:

Other Similar products are found below :

[581102B00000G](#) [656-15ABPE](#) [657-20ABPNE](#) [7020B-TC12-MTG](#) [73452PPBA](#) [7G0011A](#) [PF720G](#) [A22-4026](#) [120-1873-007](#) [HAH10L](#)
[HAH15L](#) [1542616-1](#) [HS-2506-F1](#) [HS-87M0-F2](#) [218-40CTE3](#) [231-69PAB-15V](#) [25-7520](#) [SW50-4G](#) [231-75PAB-13V](#) [231-75PAB-15V](#) [253-](#)
[122ABE-22](#) [PSC22CB](#) [HAF10L](#) [HAQ10T](#) [D10100-28](#) [BDN183CBA01](#) [3-21053-4](#) [32438](#) [TX0506-1B](#) [TX1806B](#) [LAE66A3CB](#) [WA-DT2-](#)
[101E](#) [511-3U](#) [73381PPBA](#) [73403PPBA](#) [7G0047C](#) [COMX-440-HSP](#) [510-12M](#) [D10650-40T5](#) [V8511 Y](#) [APF40-40-13CB/A01](#)
[780653U04500G](#) [ATS-54310K-C2-R0](#) [FK 216 CB SA](#) [FK 231 SA 220](#) [648-51AB](#) [657-20ABPESC](#) [2341BG](#) [679-25AG](#) [FK 212 CB SA](#)