CUI DEVICES

date 01/22/2020

page 1 of 4

MODEL: CMS-40208N | DESCRIPTION: SPEAKER

FEATURES

- 650 Hz resonant frequency
- 98 dB SPL
- Nd-Fe-B magnet





SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
input power	maximum power: IEC-60268-5, filter 60s on/120s off, 10 cycles at room temp		1.0	1.5	W
impedance	at 1.0 V, 2.0 kHz	6.8	8	9.2	Ω
resonant frequency (Fo)	at 1.0 V	520	650	780	Hz
frequency response	output SPL -10 dB	Fo		13,000	Hz
sound pressure level	at 1.0 W, 0.1 m ave, at 0.8, 1.0, 1.2, 1.5 kHz	95	98	101	dB
distortion	at 1.0 kHz, 1.0 W			10	%
buzz, rattle, etc.	must be normal at sine wave between Fo ~ 20,000 Hz		2.83		V
dimensions	40 x 20 x 8.4				mm
magnet	Nd-Fe-B				
material	ABS				
cone material	cloth				
terminal	solder terminals				
weight			7		g
operating temperature		-30		70	°C
storage temperature		-40		85	°C
RoHS	yes				

Notes: 1. All specifications measured at 5~35°C, humidity at 45~85%, under 86~106 kPa pressure, unless otherwise noted.


SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 3 seconds	370	380	390	°C

MECHANICAL DRAWING


units: mm

tolerance: ±0.5 mm

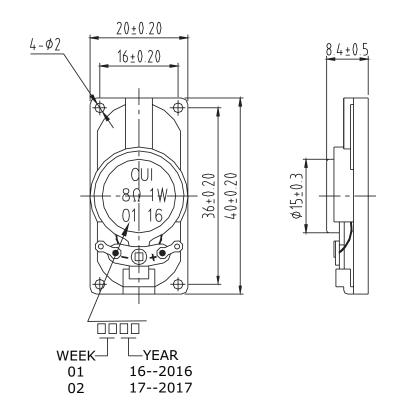

FREQUENCY RESPONSE CURVE


Frequency Response.Magn dB re 20.00μ PA (at 1 W / 0.1 m)

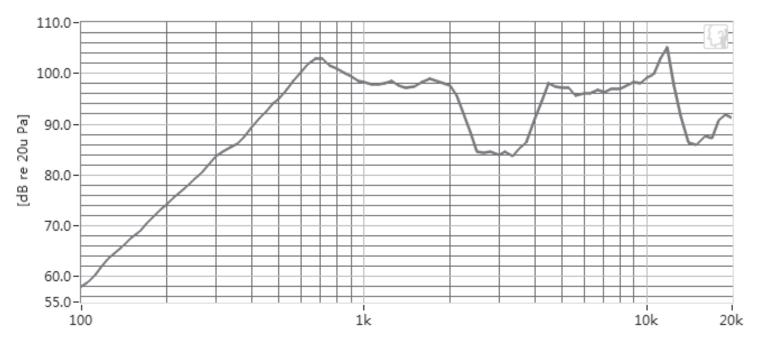


PACKAGING

units: mm

Tray Size: 330 x 250 x 13 mm Carton Size: 345 x 265 x 305 mm Tray QTY: 50 pcs per tray Carton QTY: 1,000 pcs per carton



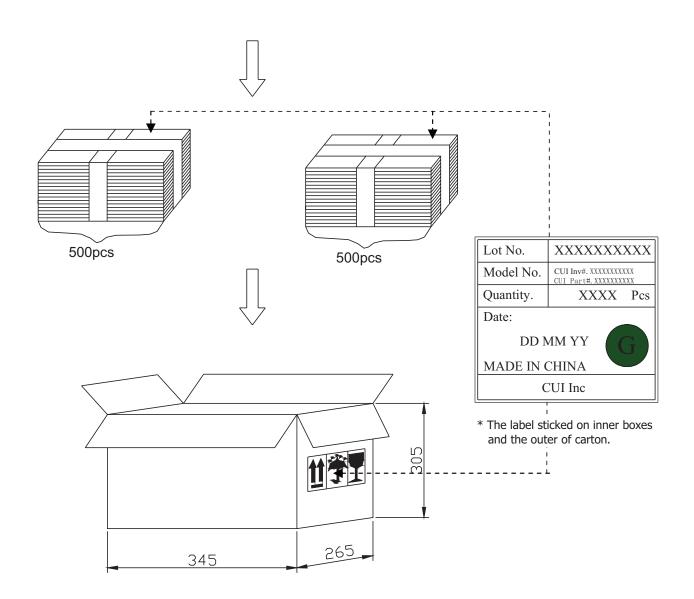

Additional Resources: Product Page

CUI Devices | MODEL: CMS-40208N | DESCRIPTION: SPEAKER date 01/22/2020 | page 4 of 4

REVISION HISTORY

rev.	description	date
1.0	initial release	06/23/2016
1.01	brand update	01/22/2020

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Speakers & Transducers category:

Click to view products by CUI Devices manufacturer:

Other Similar products are found below:

FC-30814-P127 AS02832MR-2-R PB-1220PE PB-2015PQ 900-00001 AB2025B-LW50-R SWFK-31736-000 PT-2065FW PT-4175W AT-2830-TW-LW35-R ED-30761-000 CI-30120-A42 SMT-0440-T-2-R PB-0927PQ BF-7083-000 SMS2020-08H4.5 LF BDT1717-08H6.5W56MLF GSPK1003PN-8R0.2W-L100 GSPK151103TN-8R0.2W GSPK2014035PN-8R0.5W-L100 FS5353DS0830-H19.3 TE082703-8 XMLP040BD21F AS03608MR-LW100-R 24520 SMT-0540-S-2-R 1450069 9091653 9091661 IPS-G6000-5 9090231 FS4014-4-2W PBM4-13.B29R.A115.0663 PBM4-13.B31R.A115.0663 PBM4-13.B33R.A115.0663 PBM4-13.B35R.A115.0663 A-10-6-BG360-HD1Z-GA-M4Z-ZW A-10-6-BG410-HD1Z-AA-AGZ-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-GA-M4Z-ZW A-10-6-BG310-HD1Z-AA-AGZ-ZW A-10-6-BG310-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG340-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG340-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG340-HD1Z-AA-AGZ-ZW A-10-6-BG340-HD1Z-AA-AGZ-ZW A-10-6-BG340-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG340-HD1Z-AA-AGZ-ZW A-10-6-B