



SERIES: PDRA-240 | DESCRIPTION: AC-DC POWER SUPPLY

FEATURES


- up to 240 W continuous power
- universal input voltage range
- over current, over voltage, input under voltage, short circuit, and over temperature protections
- active power factor correction
- remote on/off control
- output trim
- low ripple and noise
- -25 to +70°C temperature range
- UL/cUL 60950-1 safety approval
- efficiency up to 93%



MODEL	output voltage	output current max	output power max	ripple and noise ¹ max	efficiency ² typ
	(Vdc)	(A)	(W)	(mVp-p)	(%)
PDRA-240-24	24	10	240	100	92
PDRA-240-48	48	5	240	150	93

Notes: 1. At full load, nominal input, 20 MHz bandwidth oscilloscope, with a 1 μ F ceramic and 10 μ F electrolytic capacitor on the output.
 2. At 230 Vac input.
 3. All specifications are measured at Ta=25°C, humidity <75%, nominal input voltage, and rated output load unless otherwise specified.

PART NUMBER KEY

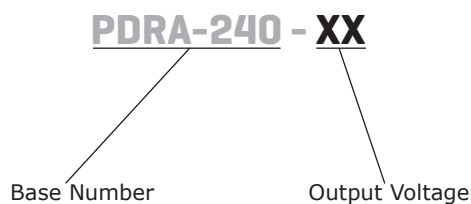

INPUT

parameter	conditions/description	min	typ	max	units
voltage		85		264	Vac
		120		370	Vdc
frequency		47		63	Hz
under voltage protection	start-up voltage at full load	75		83	Vac
	shutdown voltage at full load	67		74	Vac
current	at 115 Vac			3.0	A
	at 230 Vac			1.5	A
inrush current	at 115 Vac		30		A
	at 230 Vac		60		A
power factor correction	at 115 Vac		0.98		
	at 230 Vac		0.96		
no load power consumption			1.0		W

OUTPUT

parameter	conditions/description	min	typ	max	units
capacitive load	24 Vdc output model			4,700	µF
	48 Vdc output model			2,700	µF
initial set point accuracy				±1	%
line regulation	at full load			±0.5	%
load regulation	from 5~100% load			±1	%
adjustability ¹	via built in trim pot				
	24 Vdc output model	24		28	Vdc
	48 Vdc output model	48		52.8	Vdc
start-up time				1.5	s
hold-up time	at 115/230 Vac		22		ms
switching frequency			100		kHz
temperature coefficient			±0.03		%/°C

Notes: 1. Max output power of 240 W.

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over voltage protection	continuous, auto recovery				
over current protection	auto recovery	110		150	%
short circuit protection	continuous, auto recovery				
over temperature protection	output shutdown, auto recovery				

SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute	3,000			Vac
	input to ground for 1 minute	1,500			Vac
	output to ground for 1 minute	500			Vac
safety approvals	UL 60950-1, EN 60950-1				
safety class	class I				
EMI/EMC	EN 55022, EN 55024, EN 61000-3-2, EN 61000-3-3				
conducted emissions	CISPR22/EN55022, Class B				
radiated emissions	CISPR22/EN55022, Class B				
ESD	IEC/EN61000-4-2, contact ±6 kV/ air ±8 kV, Class B				
radiated immunity	IEC/EN61000-4-3, 10 V/m, Class A				
EFT/burst	IEC/EN61000-4-4, ±4 kV, Class B				

Notes: 2. The power supply is considered a component which will be installed into final equipment. The final equipment still must be tested to meet the necessary EMC directives.

SAFETY & COMPLIANCE (CONTINUED)

parameter	conditions/description	min	typ	max	units
surge	IEC/EN61000-4-5, line to line ± 2 kV/ line to ground ± 4 kV, Class B				
conducted immunity	IEC/EN61000-4-6, 10 Vr.m.s, Class A				
PFM	IEC/EN61000-4-8, 10 A/m, Class A				
voltage dips & interruptions	IEC/EN61000-4-11, 0%-70%, Class B				
MTBF	as per MIL-HDBK-217F at 25 °C	300,000			hours
RoHS	2011/65/EU				

Notes: 1. The power supply is considered a component which will be installed into final equipment. The final equipment still must be tested to meet the necessary EMC directives.

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curves	-25		70	°C
storage temperature		-25		85	°C
storage humidity	non-condensing			95	%


MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	60.00 x 125.00 x 120.00 (2.36 x 4.92 x 4.72 inches)				mm
material	heat resistant plastic (UL94V-0) and metal				
weight			820		g


MECHANICAL DRAWING

units: mm [inch]
tolerance: $\pm 1.00[\pm 0.040]$

wire range: 26~10 AWG
strip length: 8.0 mm
mounts to DIN RAIL TS35
tightening torque: max 0.4 N*m

TERMINAL CONNECTIONS	
TERMINAL	Function
1	+Vout
2	+Vout
3	-Vout
4	-Vout
5	AC(N)
6	AC(L)
7	


CONTROL TERMINAL	
TERMINAL	Function
1	+CTRL
2	-CTRL

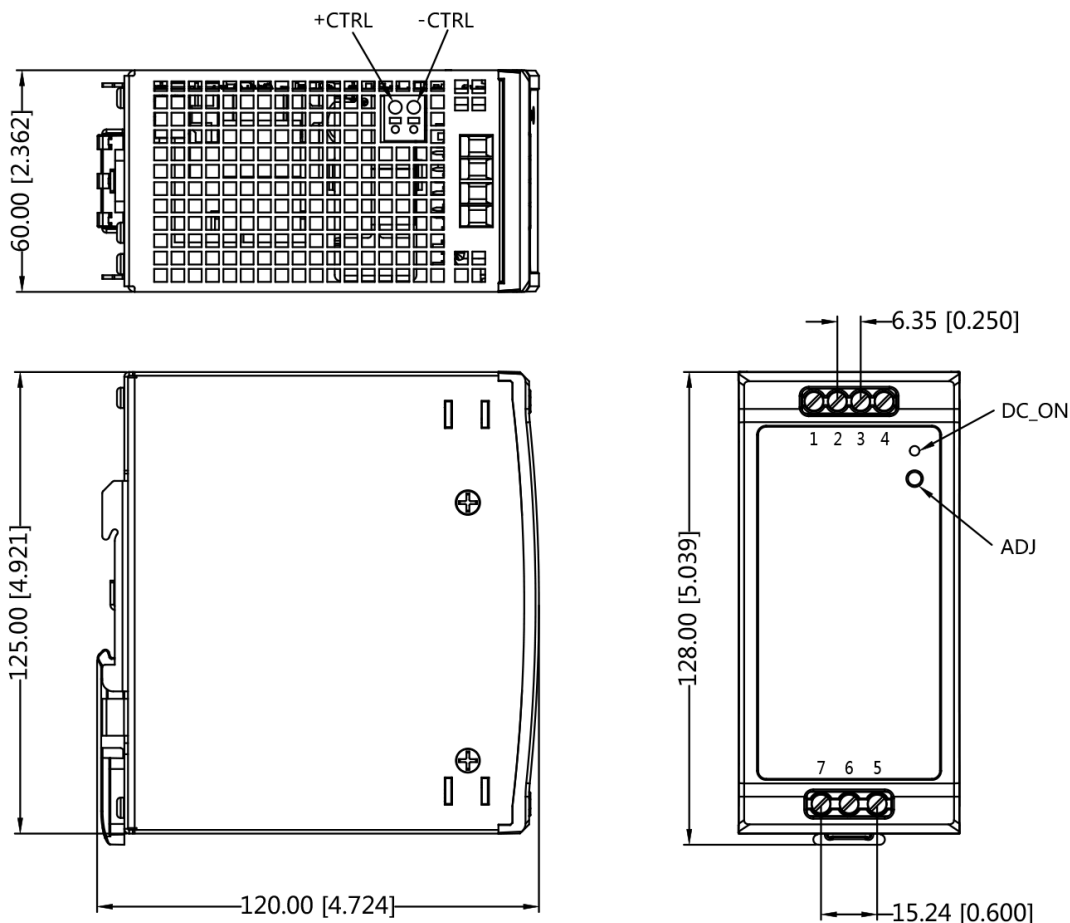


Note: 2. Rail needs to connect to safety ground.

DERATING CURVES

load vs. ambient temperature
(at 85~264 Vac / 120~370 Vdc input voltage)

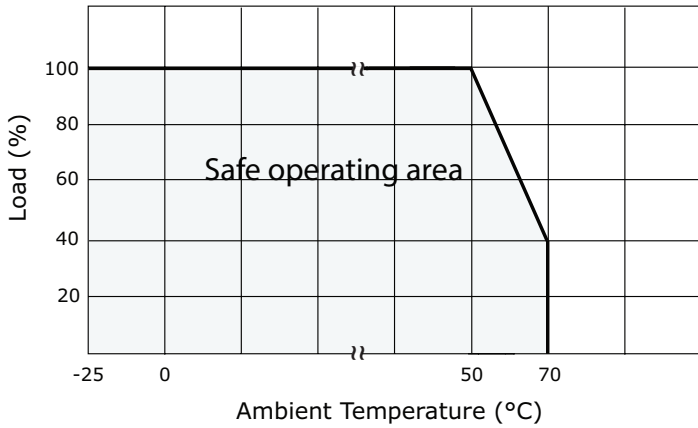


load vs. input voltage
(at 25°C)

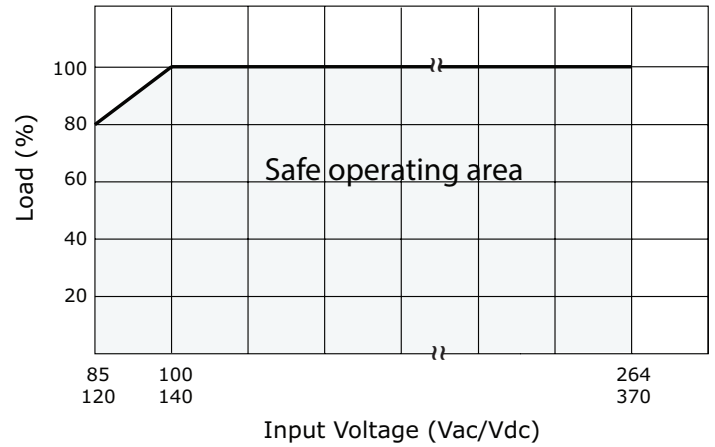


EFFICIENCY CURVES


PDRA-240-24 Efficiency Curve
(Efficiency vs. Input Voltage)

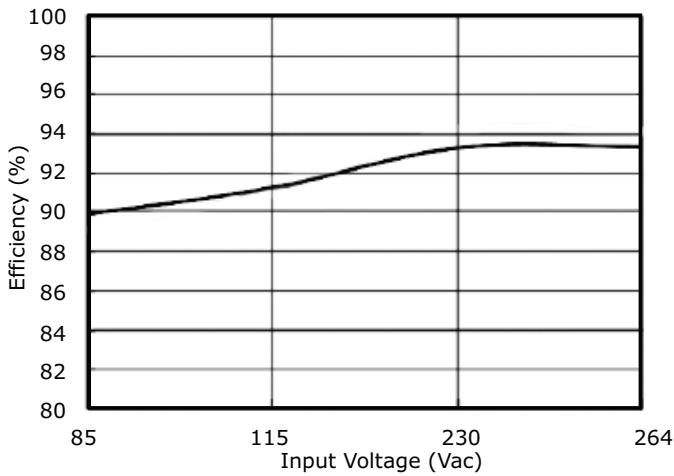


PDRA-240-24 Efficiency Curve
(Efficiency vs. Load Current)

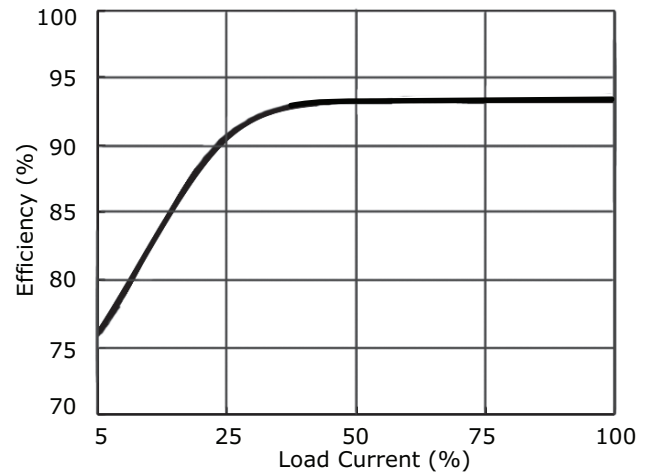

PDRA-240-48 Efficiency Curve
(Efficiency vs. Input Voltage)

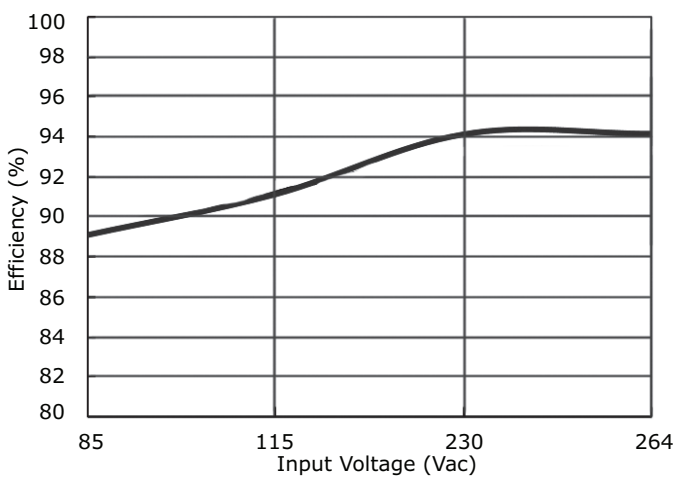

PDRA-240-48 Efficiency Curve
(Efficiency vs. Load Current)

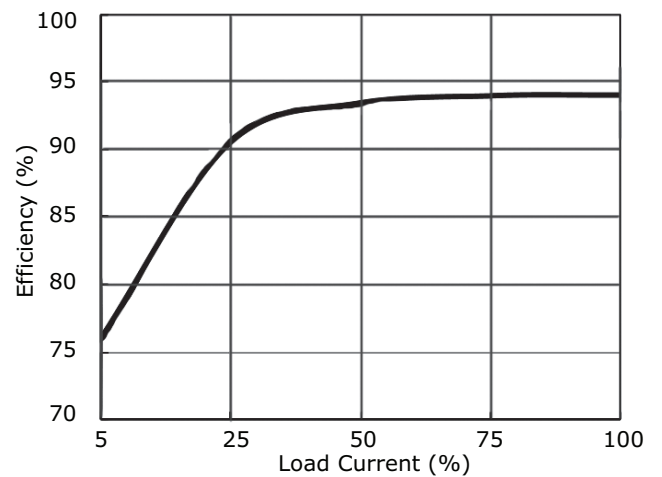

APPLICATION CIRCUIT

Figure 1 Typical Application Circuit


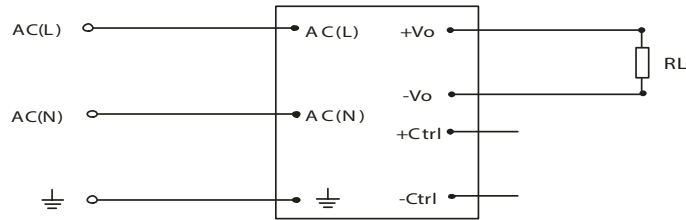


Figure 2 Remote Control Applications Circuit

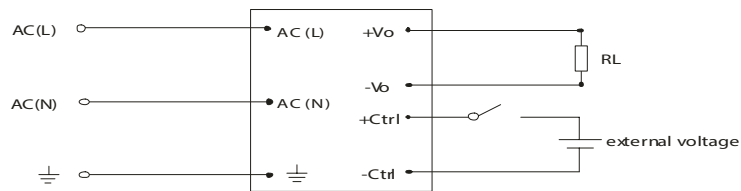

The power supply can be turned on/off by using the "CTRL" terminals.
 Enable output: open
 Disable output: 4.5~12.5 Vdc

REVISION HISTORY

rev.	description	date
1.0	initial release	10/17/2016
1.01	added 48 Vdc output model	02/01/2018

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Power Supplies](#) category:

Click to view products by [CUI Inc](#) manufacturer:

Other Similar products are found below :

[PS-S6024](#) [DVP01PU-S](#) [DVP06AD-S](#) [DVP06XA-S](#) [DVDPNET-SL](#) [DVPDT01-S](#) [DVPPS01](#) [PS-6012](#) [PS9Z-5R1G](#) [PS-C24024](#)
[DVP08ST11N](#) [DVPACAB530](#) [DVPCOPM-SL](#) [DVPEN01-SL](#) [DVPPF01-S](#) [ADNB008-48-1PM-C](#) [ADNB017-24-1PM-C](#) [ADNB040-24-1PM-C](#) [ADNB034-12-1PM-C](#) [SS14011524](#) [PS-UPS40](#) [PSC-6024](#) [PSD-A60W12](#) [96PS-A120WDIN](#) [PSD-A60W48](#) [PSD-A40W12](#) [PSD-A40W24](#) [SMP21-L20-DC24V-5A](#) [PSD-A40W48](#) [S8T-DCBU-02](#) [PS-S4024](#) [NTPS-24-1.3](#) [ZI-20](#) [PST-96024](#) [S82YVSC4P](#) [PS-S4005](#) [PS-10024](#) [PS-S10024](#) [PS-C12024](#) [PSP-480S24](#) [PS-C48024](#) [PSC-2024](#) [PSC-4012](#) [PSC-4048](#) [PSC-9615](#) [PSC-15124](#) [PSC-15148](#) [PSC-24148](#) [PSC-48148](#) [TRIO-PS-2G/1AC/12DC/5/C2LP](#)