

Power Choke Coil CMLE061E type

■ Features

High performance (Isat) realized by metal dust core.

Low profile : Thickness max. 1.5mm

Low loss realized with low DCR

Capable of corresponding high frequency (3MHz)

100% lead (Pb) free meet RoHS standard


■ Application

DC/DC converter for CPU in Notebook PC

Thin type on-board power supply module for exchanger

VRM for server


■ Outline Dimensions

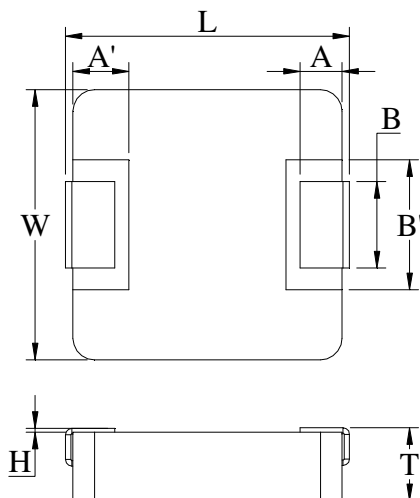

Code	Dimensions (mm)
L	6.86 ± 0.381
W	6.47 ± 0.254
T	1.3 ± 0.2
A	1.6 ± 0.3
A'	2.0 ± 0.1
B	3.0 ± 0.3
B'	3.6 ± 0.2
H	0 ~ +0.15

■ Recommend Land Pattern Dimensions

The customer shall determine the land dimensions shown below after confirming and safety.

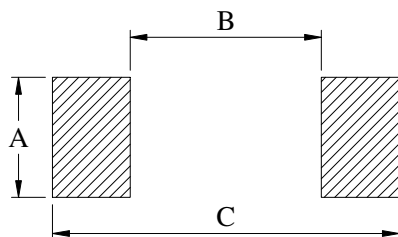

A	3.5
B	3.7
C	8.4

Unit : mm

■ Specifications

Part Number	L0 Inductance (μH) @ (0A)	R_{dc} ($m\Omega$)		Heat Rating Current DC Amps. I_{dc} (A)		Saturation Current DC Amps. I_{sat} (A)	
		Typical	Maximum	Typical	Maximum	Typical	Maximum
CMLE061E-R12MS	0.12	3.0	3.65	19.0	17.0	29.0	25.0
CMLE061E-R33MS	0.33	5.6	6.50	13.5	12.0	21.0	19.0
CMLE061E-R47MS	0.47	7.2	8.50	13.0	11.0	18.0	15.5
CMLE061E-R56MS	0.56	9.5	11.0	10.0	9.0	15.0	14.0
CMLE061E-R82MS	0.82	15.0	17.0	9.0	8.5	13.0	11.0
CMLE061E-1R0MS	1.0	18.5	21.0	8.2	7.6	12.0	10.0
CMLE061E-1R2MS	1.2	21.0	25.0	7.5	7.0	10.5	8.5
CMLE061E-1R5MS	1.5	25.0	28.0	7.2	6.7	8.5	7.7
CMLE061E-2R2MS	2.2	35.0	42.0	6.0	5.1	7.2	6.1
CMLE061E-3R3MS	3.3	54.0	63.0	3.8	3.3	6.0	5.2
CMLE061E-4R7MS	4.7	75.0	84.0	3.5	3.0	5.0	4.5
CMLE061E-6R8MS	6.8	125.0	135.0	3.0	2.5	4.5	4.0
CMLE061E-100MS	10.0	165.0	175.0	2.2	2.0	3.5	3.0

*: If you require another part number please contact with us.

** : Inductance Tolerance $\pm 20\%$

Note 1. : All test data is referenced to 25°C ambient.

Note 2. : Test Condition: 100KHz, 1.0Vrms

Note 3. : I_{dc} : DC current (A) that will cause an approximate ΔT of 40°C









Note 4. : I_{sat} : DC current (A) that will cause L0 to drop approximately 30%






Note 5. : Operating Temperature Range -55°C to $+125^{\circ}\text{C}$

Note 6. : The part temperature (ambient + temp rise) should not exceed 125°C under the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

Note 7. : The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Current Characteristic

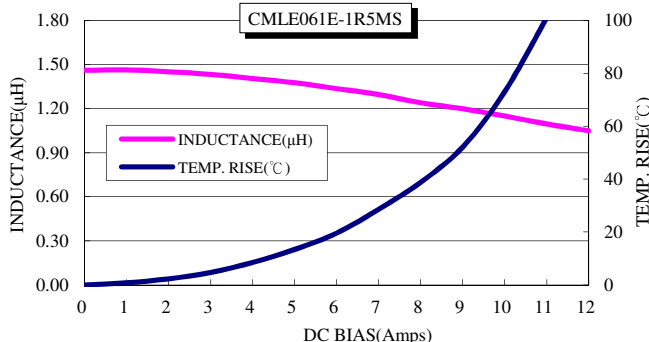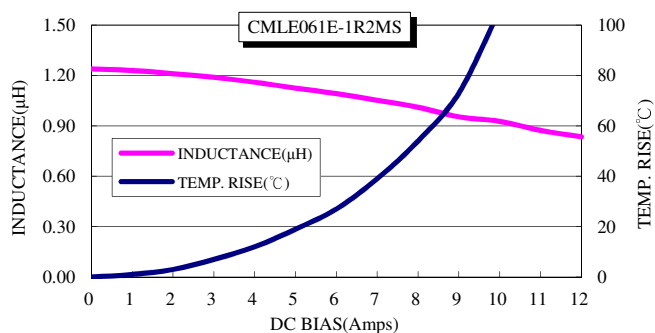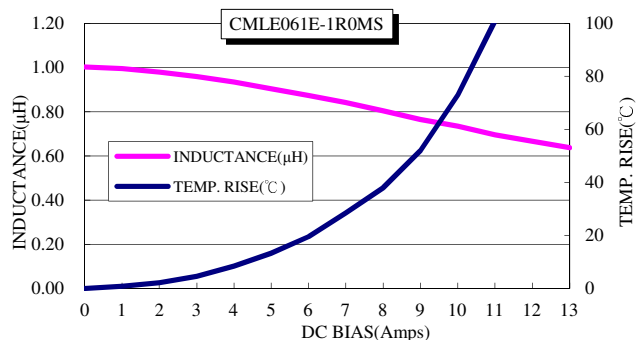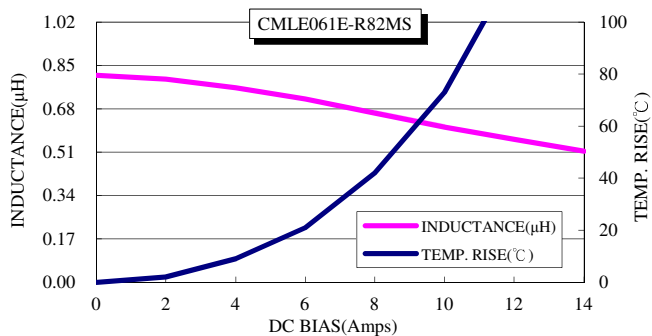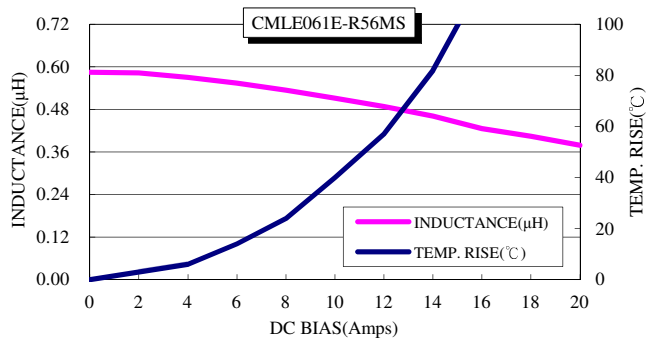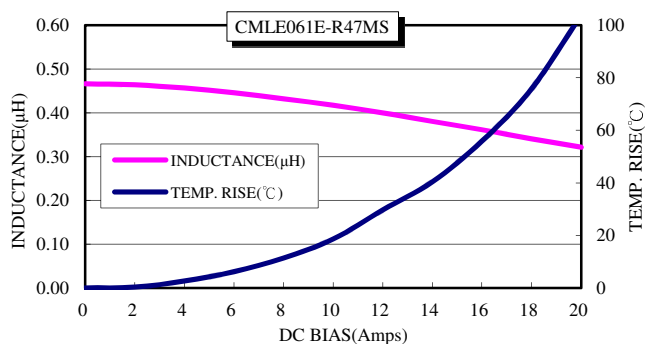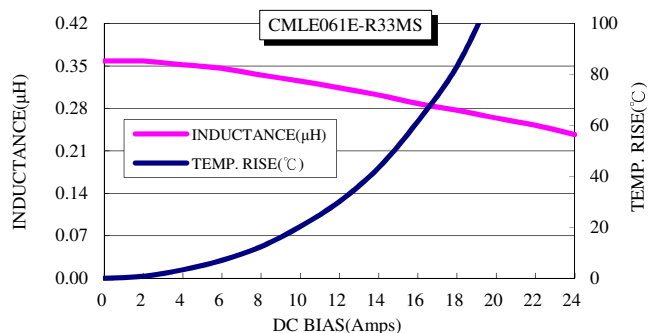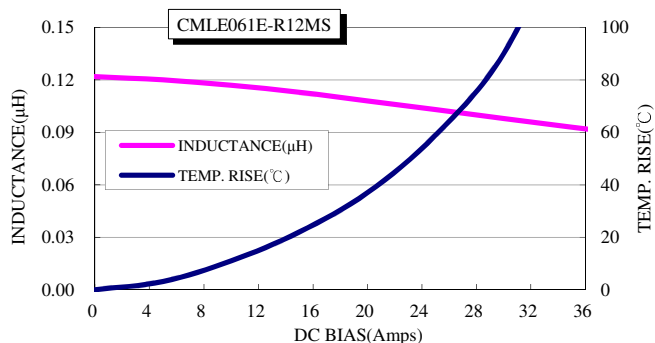

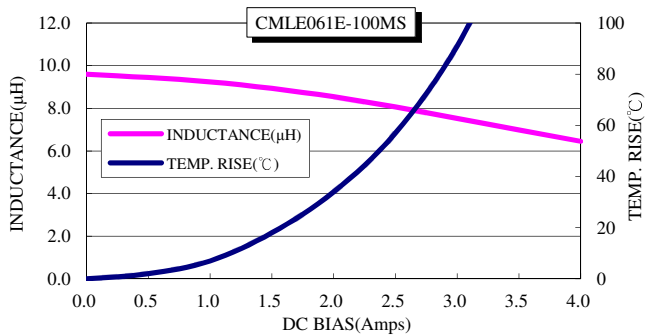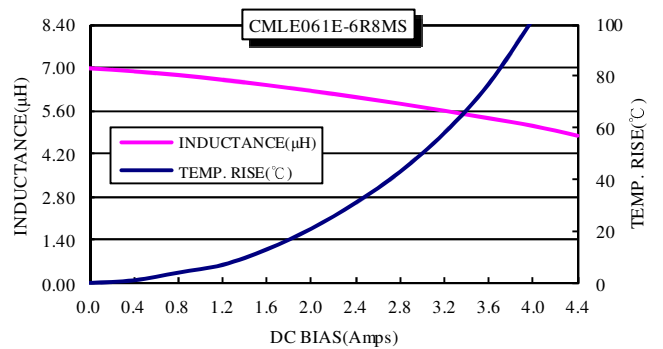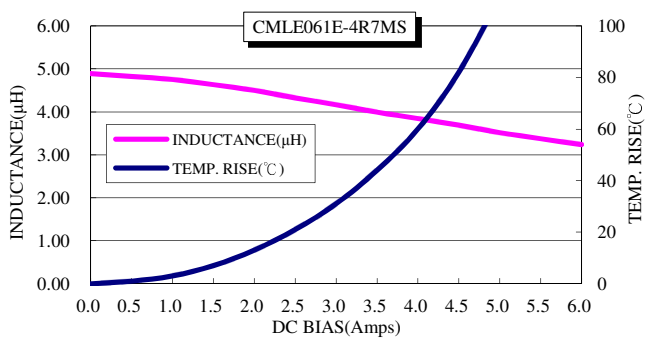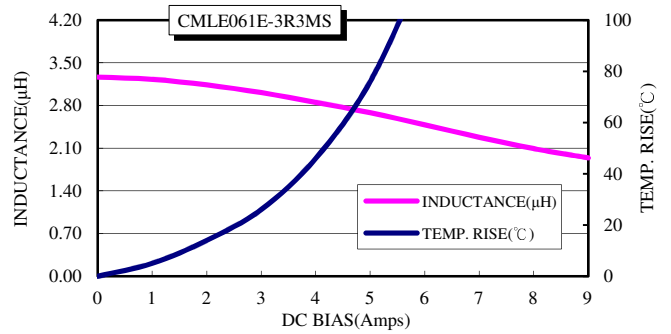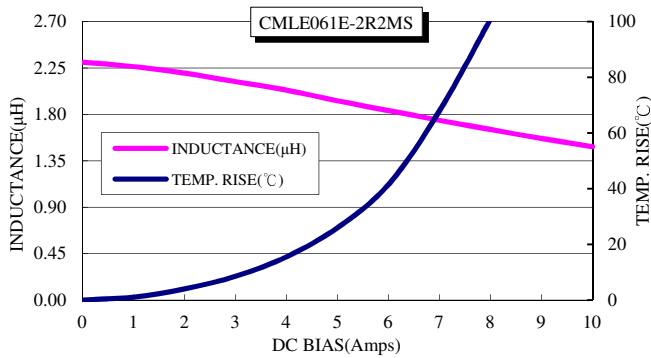

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Cyntech](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#)