


STATFREE® ESD ULTRA CLEAR BAG

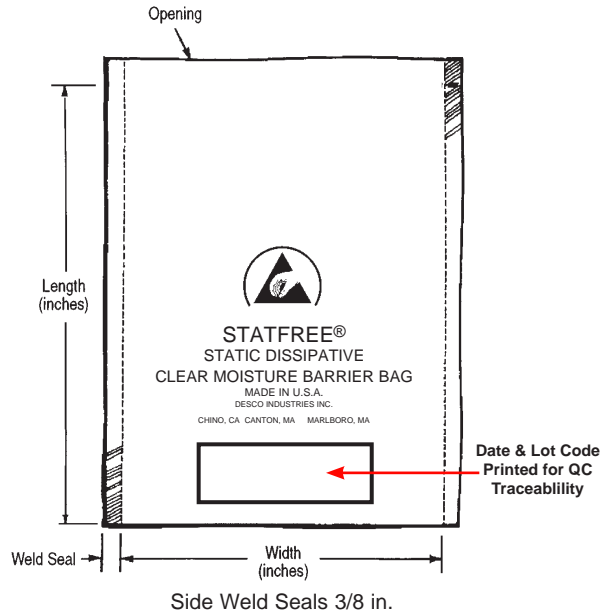

Specifications:

Electrical Properties

Electrical Properties	Typical Value
Surface Resistance: (Interior and Exterior)	< 1 x 10 ¹¹ ohms
Charge Generation:	
Teflon	-0.10 (nC/in ²)
Quartz	+0.10 (nC/in ²)

Test Procedures/Method

Per ANSI/ESD STM11.11
Modified Incline Plane
Modified Incline Plane

Physical Properties:

Physical Properties	Typical Value	Test Procedures/Method
Thickness	Nominal .0035" (.0889mm) ±10%	MIL-STD-3010, 1003
Width (Inside Dimensions)	Nominal -0" / + .125"	
Length (Inside Dimensions)	Nominal ± .125"	
Light Transmission	>90 (%)	STM D-1003
Heat Seal	>8 (lbs/in)	375°F, .75 sec 60 psi
Tensile Strength	>5,300 (MD/TD, psi)	ASTM D-882
Puncture Res.	>25 lbs	MIL-STD-3010, 2065
MVTR	0.35	ASTM F-1249

Chemical Properties


Polycarbonate compatible: Contains no Amines, Amides, or N-Octanoic Acid.

Bag is free of amines, N-octanoic acid, silicones and heavy metals.

ANSI/ESD S541 Section 6.1 Inside an EPA

"Packaging used within an EPA (that satisfies the minimum requirements of ANSI/ESD S20.20) shall be:

- Low charge generation
- Dissipative or conductive materials for intimate contact

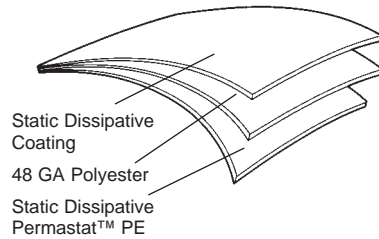

RoHS 2 and REACH Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2012/12/19 are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE.
See Desco [Limited Warranty at Desco.com](http://www.Desco.com).



Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades

Desco's bags are recyclable

Statshield® bags are packaged 100 per package in an oversized shielding bag.
Shelf life of bags is minimum one year in normal indoor storage conditions.

Meets ANSI/ESD S20.20 and Packaging standard ANSI/ESD S541 tested per ANSI/ESD STM11.11

Statshield® and Statfree® are Registered Trademarks of Desco Industries Inc.



Made in the United States of America

Specifications and procedures subject to change without notice.

STATFREE® ESD ULTRA CLEAR BAG, .0035" (.0889mm)

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
PHONE (781) 821-8370

DRAWING NUMBER
13878

DATE:
July
2013

DESCO

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antistatic Control Products](#) category:

Click to view products by [Desco](#) manufacturer:

Other Similar products are found below :

[13020](#) [13490](#) [13881](#) [13883](#) [14404](#) [2202SP](#) [2229](#) [2230](#) [37061](#) [42470](#) [09813](#) [09857](#) [04563](#) [09037](#) [09813](#) [66070](#) [100816](#) [98132](#) [73741](#)
[13868](#) [13457](#) [13245](#) [13420](#) [13205](#) [13135](#) [91070](#) [66085](#) [13080](#) [13806](#) [10057](#) [1501024](#) [150715](#) [19863](#) [09121](#) [73831](#) [07501](#) [66086](#) [66121](#)
[16316](#) [13331](#) [ZN-A2502](#) [1900-8X12](#) [1910-10X12](#) [82A3](#) [1900-6X8](#) [1900-7-15](#) [12917](#) [2231](#) [19866](#) [20-014-0002](#)