
3M

Round Containers with Covers

Data Sheet

These Velostat containers are injection-molded in a variety of shapes and sizes. They are ideal for static-safe storage, kitting, and in-process handling and transporting of static-sensitive assemblies and devices.

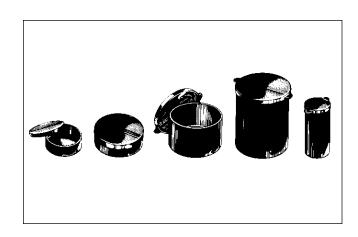

Diameter	Height
2.38" (6,0 cm)	0.88" (2,2 cm)
3.38" (8,6 cm)	0.88" (2,2 cm)
1.81" (4,6 cm)	4.0" (10,2 cm)
4.06" (10,3 cm)	2.34" (6,0 cm)
3.81" (9,7 cm)	4.69" (11,9 cm)
	2.38" (6,0 cm) 3.38" (8,6 cm) 1.81" (4,6 cm) 4.06" (10,3 cm)

All dimensions are referenced from the inside bottom of the container and are nominal dimensions.

Typical Property	Test Method	4550 Compound / 1801 Sheet Stock Typical Value *	4520 Compound / 1840 Sheet Stock Typical Value **
Hardness	ASTM D2240	58-62 Shore D	67-71 Shore D
Heat Deflection Temp.	ASTM D648	38°- 43°C @ 264 psi	100°C @ 66 psi 50°C @ 264 psi
Water Absorbtion	ASTM 570	.12%	.12%
Vicat Softening	ASTM D1525	88°- 92°C	148°C
Flammability	ASTM D635	4.5 - 5.5 cm/min	2 cm/min
Thermal Conductivity	ASTM C117	.1525 BTU/hr*ft2*°F/ft	0.19 BTU/hr*ft2*°F/ft
Impact Resistance Notched Izod	ASTM D256	2.9 - 3.7 ft-lbs/in @ 72°F 0.6 - 1.3 ft-lbs/in @ 25°F	8 - 10 ft-lbs/in @ 72°F 7 - 9 ft-lbs/in @ 25°F
Maximum Temp. Exposure	3M	150°F	180°F
Tensile Strength	ASTM D638	1700 - 2000 psi	2800 - 3000 psi
Flex Modulus	ASTM D790	40,000-50,000 psi	130,000-150,000 psi
Mold Shrinkage	ASTM 955	15 - 20 mil/in	10 - 20 mil/in
Electrical Conductance Volume Conductive	ASTM D991	< 500 ohms/cm	< 500 ohms/cm
Chemical Resistance Alcohol Aromatic Hydrocarbons Aliphatic Hydrocarbons Concentrated Acids Concentrated Alkalines Dilute Acids Dilute Alkalines Kerosene Keytones (Acetone) Mineral Oil Oil and Gasoline	ASTM D543	Resistant Severe Attack Moderate Attack Slight Attack Slight Attack Resistant Resistant Severe Attack Moderate Attack Slight Attack Moderate Attack	Resistant Severe Attack Moderate Attack Slight Attack Slight Attack Resistant Resistant Severe Attack Moderate Attack Slight Attack

^{*}Velostat polyethylene technical data for 4550 Resin; 1801; 4251-4254ASnap on Covers.

Limited Warranty – 3M expressly warrants that for a period of one year from the date of purchase, 3M static control products will be free of defects in materials (parts) and workmanship (labor). Defects occurring during the warranty period will be repaired or products will be replaced at 3M's option and expense, if 3M receives notice during the warranty period. Defective products must be returned to 3M with proof of purchase date.

Warranty Exclusions – THE FOREGOING EXPRESS WARRANTYIS MADE IN LIEU OF ALLOTHER PRODUCT WARRANTIES, EXPRESS AND IMPLIED, INCLUDING FITNESS AND MERCHANTIBILITY. The express warranty will not apply to defects or damage due to accidents, neglect, misuse, alterations, operator error, or failure to properly maintain, clean, or repair products.

Limit of Liability – In no event will 3M or Seller be responsible or liable for special, incidental, or consequential losses or damages, whether based in tort or contract. Fulfillment of 3M's warranty obligations will be Customer's exclusive remedy and 3M's and Seller's limit of liability for any breach of warranty or otherwise.

For your nearest distributor or to order, call 1-800-328-1368

^{**}Velostat polypropylene technical data for 4520 Resin; 1840; 4011-4016 Round Containers and Lids; 4021-4025 Hinged Containers; 4031-4032 (tray only); 4061-4063 Trays; 4321-4333ASlip-in Dividers; 4400ASeries Tote Boxes and 4215-4236Alnsert Covers; 4430-4431 Trays and 4420-4421 Covers; 4451-4457 Parts Bin; 4458-4459 Parts Drawer and Divider; 5701 Single Device Carriers; and 8520-8523 Single Card Carriers.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antistatic Control Products category:

Click to view products by Desco manufacturer:

Other Similar products are found below:

13020 13490 13870 13879 13881 13883 13882 14404 2202SP 3039 37061 42470 09060 09857 42516 37059 04563 17252 19691 19695 09037 09826 09813 66070 100816 68101 68103 98132 73741 13868 13485 13457 13245 13468 13420 13332 13205 13135 91070 8031 8523 66085 40931 37081 13080 13215 13806 73749 010-0225 17260