





This cost-effective Disposable Heel Grounder provides static protection and is excellent for one-time use applications, including one-time use by visitors in electronics manufacturing locations, for field service and remote electronic equipment installations.


This Heel Grounder provides a conductive path from the person to the walking surface. Adhesive holds the grounder to the sole of the shoe. No metal clips or glue are attached to the upper part of the shoe, avoiding wear. Yellow color makes heel grounder verification simple. Grounders are packaged 100 per bag.

Installation:

- 1. Insert the non-adhesive end of the heel grounder inside the shoe so that the black dot is in the center of the heel area.
- 2. Wrap the heel grounder around the back (or side) of shoe so that the adhesive can be adhered to the bottom of the heel.
- 3. Remove perforated section by lifting the paper backing from the middle as shown.
- 4. Press adhesive part of the foot grounder to the heel of the shoe. Do not allow adhesive to come in contact with any part of the shoe except for the heel. The adhesive may leave a residue.
- 5. Step in to shoe. Disposable heel grounder is to be installed on both shoes and used with ESD flooring.
- 6. Test each worn foot grounder with a Personal Grounding Tester

Specifications	Typical Value	
Size	1/2" W x 12" L	
Resistance to Ground (Rtg)	$\geq 5 \times 10^4 < 8 \times 10^5 \text{ ohms}$	

Item	Description	Length	Package
<u>5402</u>	Disposable Heel Grounder	12"	100 per bag

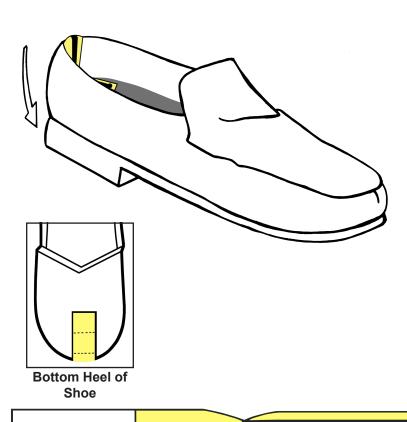

Unless otherwise noted, tolerance ± 10%

Specifications and procedures subject to change without notice.

Remove perforated section here and begin peeling towards the left



926 JR Industrial Drive. Sanford. NC 27332

5402 DISPOSABLE HEEL GROUNDER

WEB SITE: StaticControl.com PHONE (919) 718-0000 DRAWING NUMBER 5402 DATE August 2015

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Desco manufacturer:

Other Similar products are found below:

8810 CTM051 66168 66169 66210 700630 13490 13879 13881 14000 15058 2234 2370 980E 1/6PLDES1200 2121211 HGS1MD-RED 35596 35630 35874 42541 35996 35999 09200 42516 42500 24723 49111 06742 81270 07502 09214 1001230 10439 10566 14240 14213 73614 13762 13205 770000 66085 66075 40981 40980 40931 37750 34454 13806 66106