




900 MHz LONG-RANGE  
RF MODULE

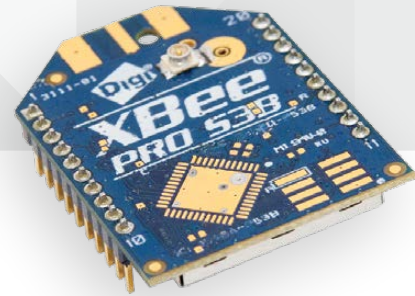

# DIGI XBEE-PRO<sup>®</sup> XSC

High-performance, long-range RF module is ideal for applications with low power requirements

Digi XBee-PRO XSC module features two times the throughput and 20 times less current draw than the previous XSC module, making it ideal for long-range sensor applications. The module features an ADF7023 transceiver from Analog Devices, delivering best-in-class distances up to 28 miles Line-of-Sight (LOS)\*, along with low power consumption, drawing less than 2.5 uA in power down.

The latest Digi XBee-PRO XSC (S3B hardware) allows for several firmware options which are firmware compatible with the legacy 9XStream<sup>®</sup> and the legacy Digi XBee-PRO XSC modules.

In addition, future firmware versions will support DigiMesh<sup>®</sup> along with Digi's proprietary point-to-multipoint protocols.

Digi's free XCTU configuration utility simplifies the configuration of the XSC module, which requires no programming. In addition, it can be easily configured via a simplified AT command set. The modules are pre-certified for North America and Australia, further reducing development costs and time to market.

## BENEFITS

- Simplified AT command set accelerates time to market
- Modules are over-the-air compatible with legacy 9XStream and XSC products
- 20 times less current draw than previous XSC module
- Superior outdoor LOS range of up to 28 miles\*
- Pin-compatible with existing through-hole Digi XBee RF modules
- RF data throughput up to 20 Kbps
- 900 MHz license-free ISM band operation

## RELATED PRODUCTS



Gateways




ZigBee  
Modules



Adapters




XCTU



Development  
Kits

## APPLICATION EXAMPLE

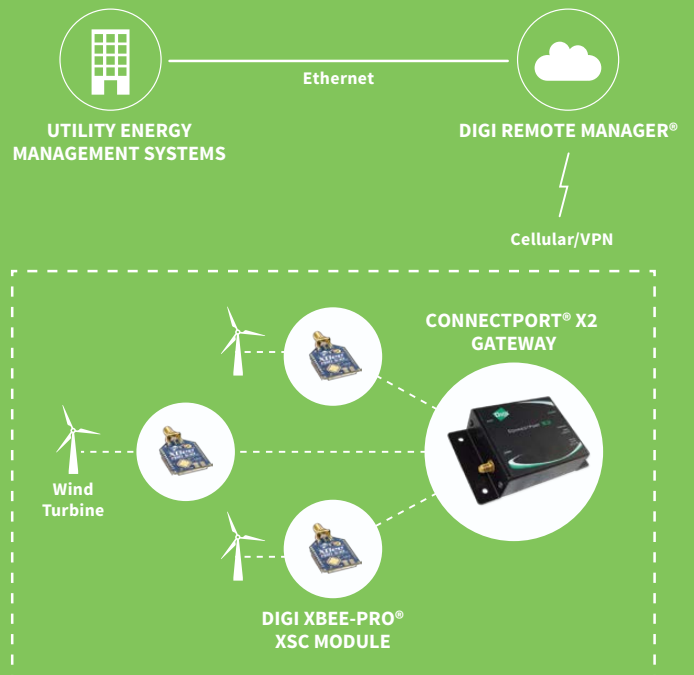

# SPECIFICATIONS

## Digi XBee-PRO® XSC (S3)

## Digi XBee-PRO® XSC (S3B)

### HARDWARE

<b>PROCESSOR</b>	ADF7025 transceiver, Atmel AT91SAM7S	ADF7023 transceiver, Cortex-M3 EFM32G230 @ 28 MHz
<b>FREQUENCY BAND</b>	902 MHz to 928 MHz	
<b>ANTENNA OPTIONS</b>	Wire, U.FL, RPSMA	

### PERFORMANCE

<b>RF DATA RATE</b>	10 Kbps	10 Kbps or 20 Kbps
<b>INDOOR/URBAN RANGE*</b>	Up to 1200 ft (370 m)	Up to 2000 ft (610 m)
<b>OUTDOOR/LINE-OF-SIGHT RANGE*</b>	Up to 6 mi (9.6 km)	Up to 9 mi (14 km) w/ dipole antenna Up to 28 mi (45 km) w/ high-gain antenna
<b>TRANSMIT POWER</b>	Up to 20 dBm (100 mW)	Up to 24 dBm (250 mW) software selectable
<b>RECEIVER SENSITIVITY</b>	-106 dBm	-109 dBm at 9600 baud -107 dBm at 19200 baud

### FEATURES


<b>SPREAD SPECTRUM</b>	FHSS
<b>OPERATING TEMPERATURE</b>	-40° C to +85° C

### POWER

<b>SUPPLY VOLTAGE</b>	3.0 - 3.6 VDC	2.4 to 3.6 VDC
<b>TRANSMIT CURRENT</b>	265 mA	215 mA
<b>RECEIVE CURRENT</b>	65 mA	26 mA
<b>SLEEP CURRENT</b>	45 uA	2.5 uA

### REGULATORY APPROVALS

<b>FCC</b>	MCQ-Digi XBeeXSC	MCQ-XBPS3B
<b>IC</b>	1846A-Digi XBeeXSC	1846A-XBPS3B
<b>C-TICK</b>	No	Australia

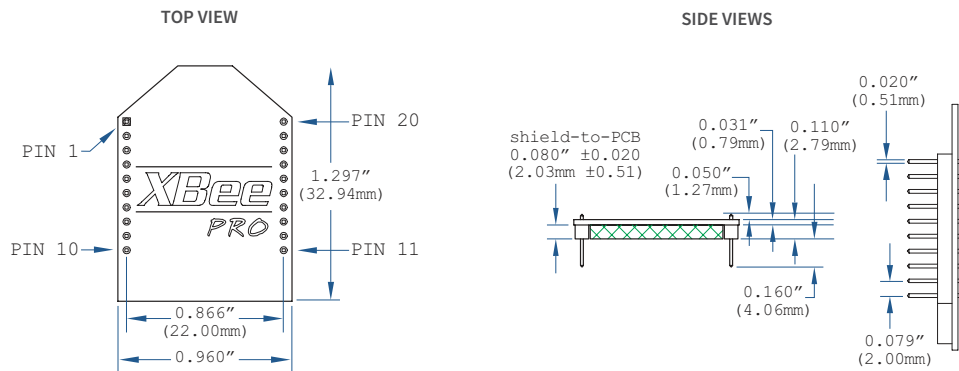

\*Range figure estimates are based on free-air terrain with limited sources of interference. Actual range will vary based on transmitting power, orientation of transmitter and receiver, height of transmitting antenna, height of receiving antenna, weather conditions, interference sources in the area, and terrain between receiver and transmitter, including indoor and outdoor structures such as walls, trees, buildings, hills, and mountains.

PART NUMBERS	DESCRIPTION
XBP9B-XCST-001	Digi XBee-PRO XSC S3B, 900 MHz, 250 mW, RPSMA ant connector, 9600 bps
XBP9B-XCUT-001	Digi XBee-PRO XSC S3B, 900 MHz, 250 mW, U.FL ant connector, 9600 bps
XBP9B-XCWT-001	Digi XBee-PRO XSC S3B, 900 MHz, 250 mW, wire antenna, 9600 bps
XBP9B-XCST-002	Digi XBee-PRO XSC S3B, 900 MHz, 250 mW, RPSMA ant connector, 19.2 Kbps
XBP9B-XCUT-002	Digi XBee-PRO XSC S3B, 900 MHz, 250 mW, U.FL ant connector, 19.2 Kbps
XBP9B-XCWT-002	Digi XBee-PRO XSC S3B, 900 MHz, 250 mW, wire antenna, 19.2 Kbps
XBP9B-XCST-021	Digi XBee-PRO XSC S3B, 920 MHz, 250 mW, RPSMA ant connector, 9600 bps (International)
XBP9B-XCUT-021	Digi XBee-PRO XSC S3B, 920 MHz, 250 mW, U.FL ant connector, 9600 bps (International)
XBP9B-XCWT-021	Digi XBee-PRO XSC S3B, 920 MHz, 250 mW, wire antenna, 9600 bps (International)
XBP9B-XCST-022	Digi XBee-PRO XSC S3B, 920 MHz, 250 mW, RPSMA ant connector, 19.2 Kbps (International)
XBP9B-XCUT-022	Digi XBee-PRO XSC S3B, 920 MHz, 250 mW, U.FL ant connector, 19.2 Kbps (International)
XBP9B-XCWT-022	Digi XBee-PRO XSC S3B, 920 MHz, 250 mW, wire antenna, 19.2 Kbps (International)
XK9-XCT-2	Digi XBee-PRO XSC S3B 920 MHz Development Kit (International)

FOR MORE INFORMATION  
PLEASE VISIT [WWW.DIGI.COM](http://WWW.DIGI.COM)

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2018 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

910016899  
B5/718

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sub-GHz Modules](#) category:*

*Click to view products by [Digi International](#) manufacturer:*

Other Similar products are found below :

[HMC-C024](#) [nRF24L01P-MODULE-SMA](#) [CMD-KEY2-418-CRE](#) [V640-A90](#) [SM1231E868](#) [HMC-C582](#) [SM-MN-00-HF-RC](#) [HMC-C031](#)  
[LoRa Node Kit\(US\)](#) [Sierra HL7588 4G KIT\(US\)](#) [WISE-4610-S672NA](#) [EC21AUFA-MINIPCIE](#) [CS-EASYSWITCH-25](#) [EC21JFB-MINIPCIE](#)  
[E28-2G4M27S](#) [E22-400T30D](#) [DL-RFM95-868M](#) [DL-RFM95-915M](#) [DL-RFM96-433M](#) [Ra-07H-V1.1](#) [Ra-07](#) [Ra-01SH](#) [Ra-01S-T](#) [Ra-01SH-](#)  
[T](#) [CMD-HHCP-418-MD](#) [CMD-HHCP-433-MD](#) [CMD-HHLR-418-MD](#) [2095000000200](#) [XB9X-DMRS-031](#) [20911051101](#) [COM-13909](#)  
[HMC-C033](#) [COM-13910](#) [WRL-14498](#) [SX1276RF1KAS](#) [HMC-C004](#) [HMC-C011](#) [HMC-C014](#) [HMC-C010](#) [HMC-C050](#) [HMC-C001](#) [HMC-](#)  
[C006](#) [HMC-C029](#) [HMC-C030](#) [HMC-C021](#) [HMC-C041](#) [HMC-C042](#) [HMC-C048](#) [HMC-C051](#) [HMC-C071](#)